



EUROPEAN
TELECOMMUNICATION
STANDARD

DRAFT
pr **ETS 300 207-6**

July 1996

Source: ETSI TC-SPS

Reference: DE/SPS-05061-R-6

ICS: 33.080

Key words: ISDN, DSS1, supplementary service, diversion, testing, ATS, PIXIT, network

**Integrated Services Digital Network (ISDN);
Diversion supplementary service;
Digital Subscriber Signalling System No. one (DSS1) protocol;
Part 6: Abstract Test Suite (ATS) and partial Protocol
Implementation eXtra Information for Testing (PIXIT) proforma
specification for the network**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Contents

Foreword	7
1 Scope	9
2 Normative references	9
3 Definitions, abbreviations	10
3.1 Definitions	10
3.2 Abbreviations	10
4 Abstract Test Method (ATM)	11
4.1 Description of ATM used	11
4.1.1 Conventions for test components and PCOs	11
4.1.2 Conventions for variables and parameters	12
4.2 Alternative ATM	13
5 Untestable test purposes	14
6 ATS conventions	14
6.1 Declarations part	14
6.1.1 Type definitions	14
6.1.1.1 Simple type definitions	14
6.1.1.2 Structured type definitions	14
6.1.1.2.1 TTCN structured type definitions	14
6.1.1.2.2 ASN.1 structured type definitions	14
6.1.1.3 ASP type definitions	16
6.1.1.3.1 TTCN ASP type definitions	16
6.1.1.3.2 ASN.1 ASP type definitions	16
6.1.1.4 PDU type definitions	16
6.1.1.4.1 TTCN PDU type definitions	16
6.1.1.4.2 ASN.1 PDU type definitions	16
6.1.2 Test suite constants	17
6.1.3 Test suite parameters	17
6.1.4 Variables	17
6.1.4.1 Test suite variables	17
6.1.4.2 Test case variables	17
6.1.5 Test suite operation definitions	17
6.2 Constraints part	18
6.2.1 Structured type constraint declaration	18
6.2.2 ASN.1 type constraint declaration	18
6.2.2.1 Specification of encoding rules	19
6.2.3 ASP type constraint declaration	20
6.2.3.1 ASN.1 ASP type constraint declaration	20
6.2.3.2 TTCN ASP type constraint declaration	20
6.2.4 PDU type constraint declaration	20
6.2.4.1 ASN.1 PDU type constraint declaration	20
6.2.4.2 TTCN PDU type constraint declaration	20
6.2.5 Chaining of constraints	20
6.2.5.1 Static chaining	20
6.2.5.2 Dynamic chaining	20
6.2.6 Derived constraints	21
6.2.7 Parameterized constraints	21
6.2.8 Value assignment	21
6.2.8.1 Specific values	21
6.2.8.2 Matching values	21

6.3	Dynamic part.....	21
6.3.1	Test cases.....	21
6.3.2	Test steps.....	21
6.3.2.1	PTC1_IN.....	21
6.3.2.2	PTC1_OUT.....	21
6.3.3	Defaults.....	21
7	ATS to TP map.....	22
8	PCTR conformance.....	22
9	PIXIT conformance.....	22
10	ATS conformance.....	22
Annex A (normative): Protocol Conformance Test Report (PCTR) proforma.....		23
A.1	Identification summary.....	23
A.1.1	Protocol conformance test report.....	23
A.1.2	IUT identification.....	23
A.1.3	Testing environment.....	23
A.1.4	Limits and reservations.....	24
A.1.5	Comments.....	24
A.2	IUT conformance status.....	24
A.3	Static conformance summary.....	24
A.4	Dynamic conformance summary.....	24
A.5	Static conformance review report.....	25
A.6	Test campaign report.....	25
A.7	Observations.....	31
Annex B (normative): Partial PIXIT proforma.....		32
B.1	Identification summary.....	32
B.2	Abstract test suite summary.....	32
B.3	Test laboratory.....	32
B.4	Client (of the test laboratory).....	33
B.5	System Under Test (SUT).....	33
B.6	Protocol information.....	34
B.6.1	Protocol identification.....	34
B.6.2	Parameter values.....	34
B.6.3	Configuration of IUT.....	34
B.6.4	Parameter values.....	36
B.6.5	Timer values.....	36
B.6.6	State events.....	36
B.6.7	Interactions.....	37
B.7	Basic call PIXIT items.....	37
B.7.1	Parameter Values - Information element codings.....	37

Annex C (normative):	Abstract Test Suite (ATS)	38
C.1	The TTCN Graphical form (TTCN.GR).....	38
C.2	The TTCN Machine Processable form (TTCN.MP).....	38
Annex D (informative):	General structure of ATS	39
History	40

Blank page

Foreword

This draft European Telecommunication Standard (ETS) has been produced by the Signalling Protocols and Switching (SPS) Technical Committee of the European Telecommunications Standards Institute (ETSI), and is now submitted for the Public Enquiry phase of the ETSI standards approval procedure.

This ETS is part 6 of a multi-part standard covering the Digital Subscriber Signalling System No. one (DSS1) protocol specification for the Integrated Services Digital Network (ISDN) diversion supplementary service, as described below:

- Part 1: "Protocol specification";
- Part 2: "Protocol Implementation Conformance Statement (PICS) proforma specification";
- Part 3: "Test Suite Structure and Test Purposes (TSS&TP) specification for the user";
- Part 4: "Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma specification for the user";
- Part 5: "TSS&TP specification for the network";
- Part 6: "ATS and partial PIXIT proforma specification for the network".**

Proposed transposition dates	
Date of latest announcement of this ETS (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	6 months after doa

Blank page

1 Scope

This sixth part of ETS 300 207 specifies the Abstract Test Suite (ATS) and partial Protocol Implementation eXtra Information for Testing (PIXIT) proforma for the Network side of the T reference point or coincident S and T reference point (as defined in ITU-T Recommendation I.411 [11]) of implementations conforming to the stage three standard for the diversion supplementary services for the pan-European Integrated Services Digital Network (ISDN) by means of the Digital Subscriber Signalling System No. one (DSS1) protocol, ETS 300 207-1 [2].

ETS 300 207-5 [4] specifies the Test Suite Structure and Test Purposes (TSS&TP) related to this ATS and partial PIXIT proforma specification. Other parts specify the TSS&TP and the ATS and partial PIXIT proforma for the User side of the T reference point or coincident S and T reference point of implementations conforming to ETS 300 207-1 [2].

2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 102-1: "Integrated Services Digital Network (ISDN); User-network interface layer 3; Specifications for basic call control".
- [2] ETS 300 207-1 (1994): "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [3] ETS 300 207-2: "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 2: Protocol Implementation Conformance Statement (PICS) proforma specification".
- [4] ETS 300 207-5: "Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 5: Test Suite Structure and Test Purposes (TSS&TP) specification for the network".
- [5] ETS 300 196-1 (1993): "Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification".
- [6] ISO/IEC 9646-1: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 1: General Concepts".
- [7] ISO/IEC 9646-2: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 2: Abstract Test Suite Specification".
- [8] ISO/IEC 9646-3: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 3: The Tree and Tabular Combined Notation".
- [9] ISO/IEC 9646-4: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 4: Test realization".
- [10] ISO/IEC 9646-5: "Information Technology - OSI Conformance Testing Methodology and Framework; Part 5: Requirements on test laboratories and clients for the conformance assessment process".
- [11] ITU-T Recommendation I.411 (1993): "ISDN user-network interfaces - Reference configurations".

[12] CCITT Recommendation X.209 (1988): "Specification of Basic Encoding Rules for Abstract Syntax Notation One (ASN.1)".

3 Definitions, abbreviations

3.1 Definitions

For the purposes of this ETS, the following definitions apply:

Abstract Test Suite (ATS): See ISO/IEC 9646-1 [6].

Implementation Under Test (IUT): See ISO/IEC 9646-1 [6].

Lower Tester (LT): See ISO/IEC 9646-1 [6].

Point of Control and Observation (PCO): See ISO/IEC 9646-1 [6].

Protocol Implementation Conformance Statement (PICS): See ISO/IEC 9646-1 [6].

PICS proforma: See ISO/IEC 9646-1 [6].

Protocol Implementation eXtra Information for Testing (PIXIT): See ISO/IEC 9646-1 [6].

PIXIT proforma: See ISO/IEC 9646-1 [6].

System Under Test (SUT): See ISO/IEC 9646-1 [6].

Upper Tester (UT): See ISO/IEC 9646-1 [6].

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

ASP	Abstract Service Primitive
ATM	Abstract Test Method
ATS	Abstract Test Suite
BER	Basic Encoding Rules
CD	Call Diversion
CFB	Call Forward Busy
CFNR	Call Forward No Reply
CFU	Call Forward Unconditional
CM	Co-ordination Message
CP	Co-ordination Point
ExTS	Executable Test Suite
IUT	Implementation Under Test
LT	Lower Tester
MOT	Means Of Testing
MTC	Main Test Component
PCO	Point of Control and Observation
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
PIXIT	Protocol Implementation eXtra Information for Testing
PTC	Parallel Test Component
SUT	System Under Test
TCP	Test Co-ordination Procedures
TP	Test Purpose
TTCN	Tree and Tabular Combined Notation
UT	Upper Tester

4 Abstract Test Method (ATM)

4.1 Description of ATM used

The requirement for testing the network IUT is to focus on the behaviour of the network IUT at the user-network interface where a T reference point or coincident S and T reference point applies. Thus the IUT is the network DSS1 protocol entity at a particular user-network interface and is not the whole network.

It is possible to specify an ATS based on a Single party (remote) test method for such an IUT. However, it is considered that an ATS based on such an approach is of limited use as the only way to specify IUT generated PDUs is to use the "implicit send" statement. Many users of such an ATS would replace the "implicit send" statements with descriptions of the behaviour at other interfaces.

An ATS based on a multi-party test method is considered to be more useful in that it is closer to how a real test suite would be constructed. Such a test method specifies behaviour at multiple network interfaces. One very important limitation here is that tests are focused on one particular interface. Thus the test system is made up one Main Test Component (MTC) and one or more Parallel Test Components (PTC), see figure 1.

4.1.1 Conventions for test components and PCOs

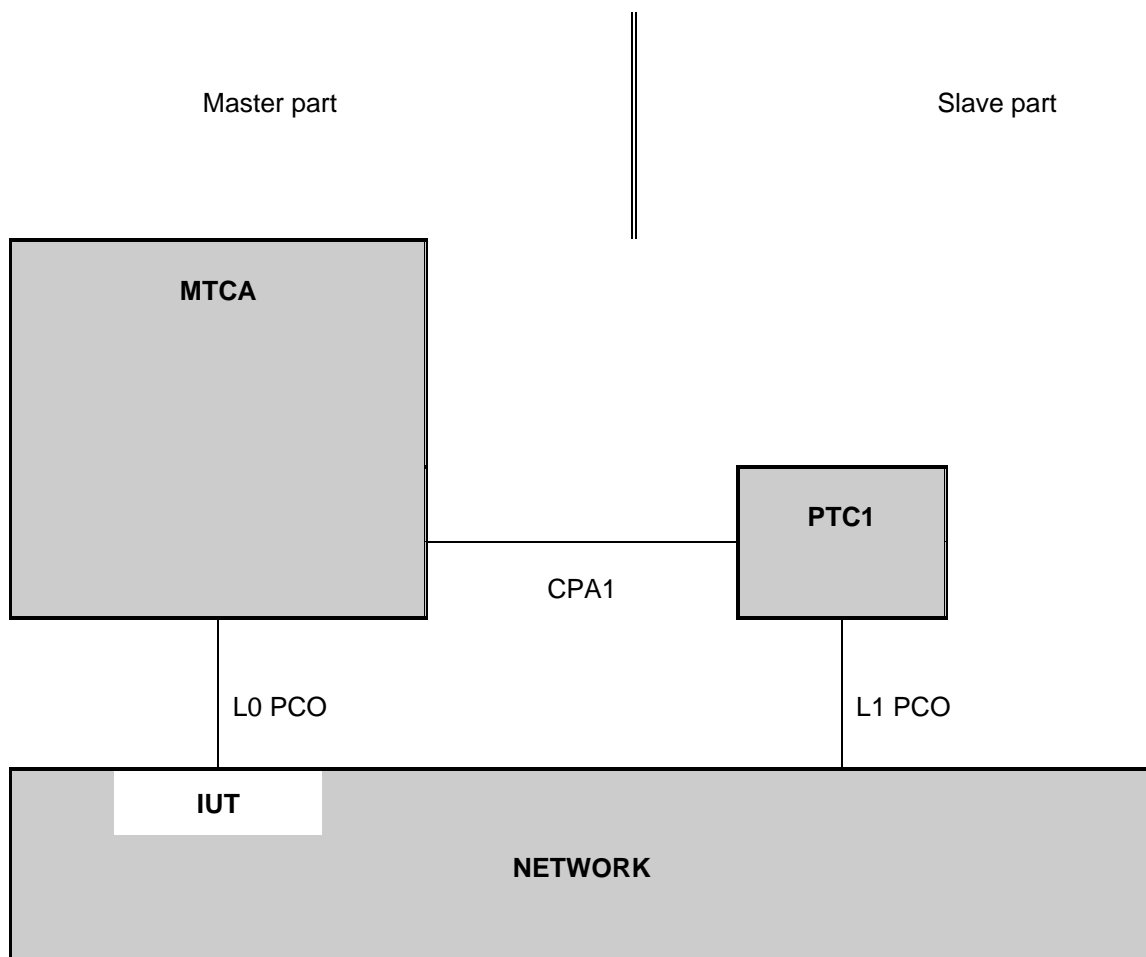


Figure 1: Multi-party test method

In a master/slave arrangement, the MTC is considered to be the master while the PTCs are the slaves. The "slave" testers are only an explicit description of how to deal with the "other" interfaces during the testing process, i.e. "how to make the IUT send the required message".

This means, in particular, that the verdict will only be assigned from the protocol aspects observed on the interface under test (i.e. by the "master" tester), as it would be observed by a terminal connected to this interface. A failure in the correlation between the protocol at the different interfaces to which the different testers are connected, i.e. in the mechanism of the functional service itself, will not cause a FAIL verdict. For instance, if the IUT fails to send a message on the tested interface after another interface has received the proper stimulus, the verdict will be INCONCLUSIVE.

The MTC MTCA has two functions in this configuration. Firstly, it has the MTC function of controlling the one or more PTCs. Thus it is responsible for starting the PTCs and afterwards co-ordinates activities by exchanging Co-ordination Messages (CM) with the PTCs. Secondly it is responsible for the behaviour of the Lower Tester (LT) at PCO L0.

A combination of the remote and multi-party test methods is applied. As can be seen from figure 1, several PCOs are used. All PCOs reside at the service access points between layers 2 and 3.

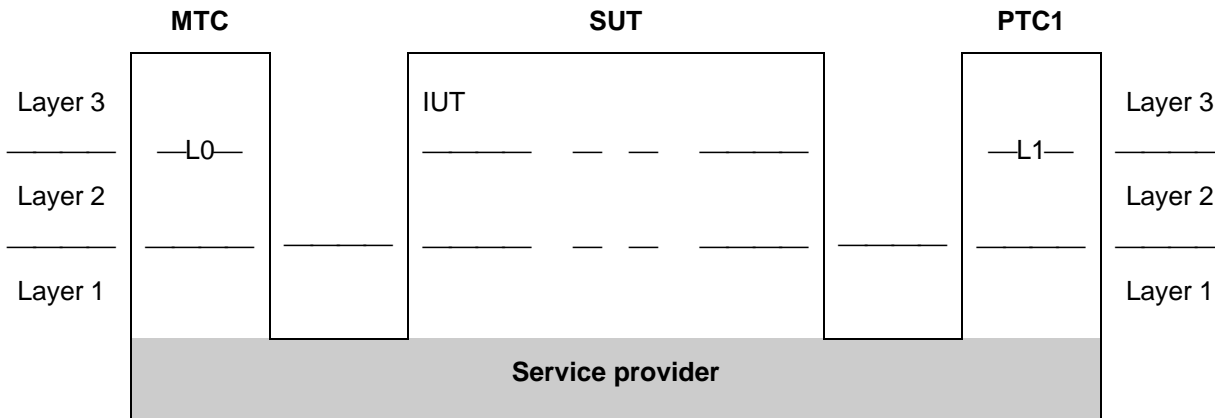


Figure 2: Combination of the remote and multi-party test methods

The MTC PCO is named "L0" ("L" for Lower). The L0 PCO is used to control and observe the behaviour of the IUT and test case verdicts are assigned depending on the behaviour observed at this PCO. The PTC PTC1 uses PCO L1. This PCO is used to control and, in a limited way, observe the behaviour of the network equipment at interfaces other than the one under test. No verdicts are assigned at this PCO.

As stated in a previous paragraph, the non-receipt of network generated messages at L0, which are stimulated by events at the L1, will result in INCONCLUSIVE rather than FAIL verdicts being assigned.

4.1.2 Conventions for variables and parameters

MTCA

call reference	CREF1	(to PTC1)
B channel (basic)	bch_num1	
channel nr (primary)	CH_NUM1	
PCO L0	IPN0, LIPN0	

PTC1

call reference	P1CREF
B channel (basic)	P1_bch_num
channel nr (primary)	P1_CH_NUM
PCO L1	IPN1, LIPN1

4.2 Alternative ATM

As stated in subclause 4.1, an ATS based on a single-party (remote) ATM is possible. Such an ATS may be generated from the one specified in this ETS. The following general steps should be taken:

- 1) remove all PTC behaviour;
- 2) remove all CREATE statements;
- 3) replace CMs which are used to provoke PDUs at the MTC, with implicit send statements.

An example, showing the difference between the multi-party ATM and single-party ATM for a single test case, is given in tables 1 and 2.

Table 1: Test case dynamic behaviour table using multi-party ATM

TEST CASE DYNAMIC BEHAVIOUR					
Test Case Name		HOLD_N04_001			
Group		RemoteUser_ST_OR_T/Holding/			
Purpose		Ensure that the IUT, while in the Active call state N10, to notify the non-served user that the call is held sends a NOTIFY message with a notification indicator coded as "remote hold" to user B and remains in the Active call state.			
Default Configuration		DF69901(1)			
Comments		9.2.1 valid optional			
Nr	Label	BEHAVIOUR DESCRIPTION	CREF	V	COMMENTS
1		CREATE (PTC1: PTC1_IN_servedUser)			
2		+PR31002			preamble N10
3		CPA!CP_M START TWAIT	S_HL		
4		L0?NOTIFYr	A_NO20(CREF1,hold_NID)	(P)	check N10
5		+CS59901(10,1)			
6		?TIMEOUT TWAIT		(I)	
7		+PO49901(1)			postamble N0
DETAILED COMMENTS:					

Table 2: Test case dynamic behaviour table using single-party ATM

TEST CASE DYNAMIC BEHAVIOUR					
Test Case Name		HOLD_N04_001			
Group		RemoteUser_ST_OR_T/Holding/			
Purpose		Ensure that the IUT, while in the Active call state N10, to notify the non-served user that the call is held sends a NOTIFY message with a notification indicator coded as "remote hold" to user B and remains in the Active call state.			
Default Configuration		DF69901(1)			
Comments		9.2.1 valid optional			
Nr	Label	BEHAVIOUR DESCRIPTION	CREF	V	COMMENTS
1					
2		+PR31002			preamble N10
3		<IUT!NOTIFY>	NO20(CREF1,hold_NID)		
4		L0?NOTIFYr	A_NO20(CREF1,hold_NID)	(P)	check N10
5		+CS59901(10,1)			
6		?TIMEOUT TWAIT		(I)	
7		+PO49901(1)			postamble N0
DETAILED COMMENTS:					

5 Untestable test purposes

There are no untestable test cases associated with this ATS and ATM.

6 ATS conventions

This clause is structured similarly to the structure of a TTCN ATS. However, the names of the subclasses are arranged in a way more suitable to this ETS.

6.1 Declarations part

6.1.1 Type definitions

6.1.1.1 Simple type definitions

Where appropriate, simple types have a length, a value list or a range restriction attached.

Simple types defined as being of some string type (e.g. BIT STRING, OCTET STRING), have a length restriction or a value list attached.

Simple types, defined as being of INTEGER type, have a value list or a range restriction attached.

6.1.1.2 Structured type definitions

6.1.1.2.1 TTCN structured type definitions

All structured type definitions are provided with a full name.

All elements in every structured type definition, defined as being of some string type (e.g. BIT STRING, OCTET STRING), have a length restriction attached.

If an element in a structured type definition is defined as being of a referenced type, the (possible) restriction is defined in that referenced type.

For information elements the identifier, which is unique for each element, has its type defined as a simple type where the value list is restricted to the single value which is the identifier itself. This has the advantage that it allows a test system derived from this ATS to easily identify information elements embedded in messages. An ATS where information element identifiers are represented as unrestricted types can present difficulties for a derived test system in the case where it needs to find one information element embedded in a number of others and the constraints for the other elements have the any-or-omit value. In such a case the test system cannot easily find the beginning of each information element.

6.1.1.2.2 ASN.1 structured type definitions

ASN.1 has been used for three major reasons. First, types defined in ASN.1 can model problems that "pure" TTCN cannot. For instance, data structures modelling ordered or unordered sequences of data are preferably defined in ASN.1. Second, ASN.1 provides a better restriction mechanism for type definitions by using sub-type definitions. Third, it is necessary to use ASN.1 to reproduce the type definitions for remote operation components as specified in the base standards.

The fact that ASN.1 provides a better restriction mechanism for type definitions is used for the purpose of achieving type-compatibility.

In table 3, the ASN.1 type BIT7OR15 is defined as being of type BIT STRING with a size constraint attached to it. The size is determined by the value of CR_LENGTH, a test suite parameter. It can have the value of either 7 or 15. The type BIT7OR15 is used in the structured type CR, field cr_r allowing this type to represent a Basic Access or a Primary Rate Access call reference. By using this type definition the field cr_r is always type compatible with values of type BIT STRING (SIZE(7)) and BIT STRING (SIZE(15)). Another approach to solve this problem would be to define the type BIT7OR15 as BIT STRING (SIZE(7 | 15)). This type has a small disadvantage compared with the previous one. It is impossible, in run-time, to determine the actual length of any instance of this type.

Table 3: ASN.1 type definition BIT7OR15

ASN.1 Type Definition
Type Name : BIT7OR15
Comments :
Type Definition
BIT STRING(SIZE(CR_LENGTH))

Table 4 shows a typical use of ASN.1. The CHI element will have two different type definitions depending on whether it represents basic or primary rate access. In TTCN, this needs to be defined as two different types. In ASN.1 this can be done in one, the type being a choice of either BASIC_CHI or PRIMARY_CHI. These two types are then (locally) defined in the same table.

Table 4: ASN.1 type definition CHI

ASN.1 Type Definition
Type Name : CHI
Comments : Info Element Channel Identification ETS 300 102-1 clause 4.5.13
Type Definition
CHOICE { basic BASIC_CHI, primary PRIMARY_CHI }
-- Local type definitions --
BASIC_CHI ::= SEQUENCE { chi_i CHI_I, -- Identifier chi_l BIT STRING(SIZE(8)), -- Length chi_e3_cs BIT STRING(SIZE(8)) -- Channel selection }
PRIMARY_CHI ::= SEQUENCE { chi_i CHI_I, -- Identifier chi_l BIT STRING(SIZE(8)), -- Length chi_e3_p1 BIT STRING(SIZE(4)), -- First nibble of Channel selection chi_e3_pe BIT STRING(SIZE(1)), -- Preferred/Exclusive Bit chi_e3_p3 BIT STRING(SIZE(3)), -- Last three bits of Channel selection chi_e4 BIT STRING(SIZE(8)), -- Channel type chi_e5_ch1 BIT STRING(SIZE(1)), -- Channel number chi_e5_ch2 BIT STRING(SIZE(7)) }

Table 5 shows an example of how ASN.1 can be used to model unordered sequences.

Table 5: ASN.1 type definition FIES

ASN.1 Type Definition
Type Name : FIES
Comments :
Type Definition
SET OF FIE

The possibility to use TTCN and ASN.1 in combination is used, i.e. referring to an ASN.1 type from a TTCN type.

6.1.1.3 ASP type definitions

6.1.1.3.1 TTCN ASP type definitions

TTCN ASP type definitions only contain one PDU or no PDU at all. The relationship between an ASP type and a PDU type is one-to-one. That is, there exists one ASP type definition for each PDU type definition (if that ASP type contains a PDU).

All TTCN ASP type definitions are provided with a full identifier.

Some ASPs are not parameterized as shown in the example in table 6. Such ASPs are only used for requesting or receiving service from the lower layer.

Table 6: TTCN ASP type definition DL_REL_IN

TTCN ASP Type Definition		
ASP NAME : DL_REL_IN(DL_RELEASE_INDICATION)		
PCO Type : SAP		
Comments :		
Parameter Name	Parameter Type	Comments
Detailed Comments :		

Table 7 shows an example of a parameterized ASP. All ASPs containing PDUs contain only that PDU and no other parameters.

Table 7: TTCN ASP type definition DL_DATA_RQ_ALERT

TTCN ASP Type Definition		
ASP NAME : DL_DATA_RQ_ALERT(DL_DATA_REQUEST)		
PCO Type : SAP		
Comments :		
Parameter Name	Parameter Type	Comments
mun (MessageUnit)	ALERT_PDU	
Detailed Comments :		

6.1.1.3.2 ASN.1 ASP type definitions

There are no ASN.1 ASP type definitions in the ATS.

6.1.1.4 PDU type definitions

6.1.1.4.1 TTCN PDU type definitions

The TTCN PDU type reflects the actual data being transferred or received. All PDUs are embedded in ASPs.

If a specific PDU type definition contains elements defined in terms of a pre-defined type, that element has a restriction attached to it.

6.1.1.4.2 ASN.1 PDU type definitions

There are no ASN.1 PDU type definitions in the ATS.

6.1.2 Test suite constants

No test suite constants are used or defined in this ATS.

6.1.3 Test suite parameters

Each test suite parameter is defined in terms of a predefined type or a referenced type. A referenced type is used when it is necessary to attach restrictions to these type definitions (it is not allowed to include restrictions directly in the test suite parameter table). The referenced type can have a length or value restriction attached to it in its declaration table.

6.1.4 Variables

6.1.4.1 Test suite variables

No test suite variables are used or defined in this ATS.

6.1.4.2 Test case variables

Each test case variable is defined in terms of a predefined type or a referenced type. A referenced type is used when it is necessary to attach restrictions to these type definitions (it is not allowed to include restrictions directly in the test case variable table). The referenced type can have a length or value restriction attached to it in its declaration table.

Where test case variables are used in constraints, they are passed as formal parameters.

6.1.5 Test suite operation definitions

The description part of a test suite operation definition uses either natural language or meta C.

Table 8: Test suite operation definition ASSIGN_CHI

Test Suite Operation Definition	
Operation Name	: ASSIGN_CHI(basic, primary : CHI; basic_flag : BOOLEAN)
Result Type	: CHI
Comments	: This operation is used to assign a correct Channel identification information element to PDUs dependent on the type of access that is tested.
Description	
<pre> { if(basic_flag) return basic; else return primary } </pre>	
Detailed comments	:

The test suite operation definition shown in table 8 is used in the constraints part when assigning an element of type CHI a value. As previously described, the CHI type can be defined in two ways depending on whether the ATS is testing basic or primary rate access. To avoid duplicate types and thereby duplicate test cases the CHI type is defined in ASN.1. This operation is used to assign a value to an element of CHI type. It takes three parameters:

```

primary:      a constraint of type CHI valid for primary rate access;
basic:        a constraint of type CHI valid for basic access;
basic_flag:   a Boolean value: TRUE if basic access is applicable, FALSE otherwise.

```

This operation returns the correct constraint according to the Boolean flag basic_flag. That constraint will then be assigned to the specific element of type CHI.

6.2 Constraints part

6.2.1 Structured type constraint declaration

For every structured type definition there exists one or more structured type constraint.

6.2.2 ASN.1 type constraint declaration

Constraints of this type are used to assign the corresponding type a specific value. These constraints are used for the purpose of modelling unordered data or specific types that cannot be expressed in TTCN.

A value assigned to an element of type SET OF differs depending on whether it is a send or receive constraint.

Table 9: ASN.1 type constraint declaration fIEs (send constraint)

ASN.1 Type Constraint Declaration	
Constraint Name	: fIEs(comp : Component)
ASN.1 Type	: FIE
Derivation Path	:
Comments	: Send FIE which will contain one component "comp".
Description	
{	
informationElementIdentifier	'00011100'B,
length	CALC_FIE_LENGTH(comp),
extBit	'1'B,
spareBits	'00'B,
protocolProfile	'10001'B,
components	{comp}
}	
Detailed comments	:

NOTE: The last element in the constraint, *components*, is of type *SET OF Component* where *Component* is structured data of some type.

If the constraint is a send constraint (as in table 9) the value for the component element is stated as "{comp}" where comp is an argument received as a parameter. The "{" and "}" turns the value into a SET OF value which is correct according to that element's type definition.

Table 10: ASN.1 type constraint declaration fIEr (receive constraint)

ASN.1 Type Constraint Declaration	
Constraint Name	: fIEr(comp : Component)
ASN.1 Type	: FIE
Derivation Path	:
Comments	: A received FIE which can contain several components, but which contains at least "comp".
Description	
{	
informationElementIdentifier	'00011100'B,
length	'????????'B,
extBit	'1'B,
spareBits	'00'B,
protocolProfile	'10001'B,
components	SUPERSET({comp})
}	
Detailed comments	:

NOTE: The last element in the constraint, named *components*, is of type *SET OF Component* where *Component* is structured data of some type.

If the constraint is a receive constraint (as in table 10) the corresponding matching value is assigned by using SUPERSET. The key-word SUPERSET has an argument that is type compatible with the type definition of that field. In table 10, the element named *components* is defined as "SET OF Component" and this implies that the argument to SUPERSET should be of type SET OF Component. This is achieved the same way as for send constraints, enclosing the value in curly brackets.

The semantic of SUPERSET is stated in ISO/IEC 9646-3 [8], subclause 11.6.4.7. In short it defines the semantic as follows: "A value that uses SUPERSET matches the incoming value if, and only if, the incoming value contains **at least all of the elements** defined within the SUPERSET, and **may contain more elements**." This is exactly the semantic definition used in this ATS.

6.2.2.1 Specification of encoding rules

At the time of specifying this ATS the mechanisms related to encoding of ASN.1 types, specified in DAM-2 of ISO/IEC 9646-3 [8], were not yet stable. Nevertheless as there is a variation in the encoding rules as applied to ASN.1 types and constraints specified in this ATS, a mechanism is used to differentiate the different encoding rules. Given the non-finalized status of DAM-2, a solution which is broadly in the spirit of DAM-2 has been created. Comment fields have been used as a means of including the encoding rules.

For ASN.1 used in this ATS, two variations of encoding rules are used. One is the commonly known Basic Encoding Rules (BER) as specified in CCITT Recommendation X.209 [12]. In the second case the encoding is according to ISDN, i.e. the ASN.1 data types are a representation of structures contained within the ISDN specification (basic call, Generic functional protocol or individual supplementary service). For example, if octets of an information element are specified in ASN.1 as a SEQUENCE then this should be encoded in an Executable Test Suite (ExTS) as any other ISDN information element specified using tabular TTCN. This ISDN encoding variation is the default encoding rule for this ATS. This means that all ASN.1 constraint tables are encoded using ISDN (non-BER) encoding unless stated otherwise. BER encoding should never be applied to an ASN.1 constraint where BER encoding has not been specified.

For BER encoding, an indication is given in the comments field of the table header. For this ATS such indications appear in the ASN.1 type constraint declaration tables only. In the first line of the table header comment field, the notation "ASN1_Encoding: BER" is used.

Note that within BER, there are a number of variations for the encoding of lengths of fields. According to ETS 300 196-1 [5], an IUT should be able to interpret all length forms within BER for received PDUs. When sending PDUs containing BER encoding, ETS 300 196-1 [5] gives guidelines but makes no restrictions on the length forms within BER which an IUT may apply.

In relation to components sent by the tester to the IUT, implementors of this ATS shall use a variety of length forms such that at least one of each of the length forms is sent to the IUT during a test campaign. The variations of length forms to be used are indefinite, short definite and long definite.

In this particular ATS all ASN.1 type constraints which are of type "Component" are to be encoded using BER.

Table 11: ASN.1 type constraint declaration showing use of encoding variation

ASN.1 Type Constraint Declaration	
Constraint Name :	Beg3PTYinv
ASN.1 Type :	Component
Derivation Path :	
Comments :	ASN1_Encoding: BER Receive component: Begin3PTY invoke component
Description	
begin3PTY_Components	
begin3PTY_InvokeComp	
{ invokeID	? ,
operation_value	localValue 4 }
Detailed comments :	

6.2.3 ASP type constraint declaration

6.2.3.1 ASN.1 ASP type constraint declaration

No ASN.1 ASP type constraint declaration exists in this ATS.

6.2.3.2 TTCN ASP type constraint declaration

For TTCN ASP constraint declarations there is a one-to-one relationship between its type and the constraint. That is, there is only one constraint for each TTCN ASP Type Declaration. The reason for this is that the ASPs are used only for carrying a specific PDU value. The many ASP constraints (and types) could have been avoided by using the meta type **PDU**, but that was not suitable as values inside a specific PDU have to be referenced. To reference elements inside a value of meta type **PDU** is not allowed according to ISO/IEC 9646-3 [8], so each ASP has to be defined as having a parameter of a specific PDU type.

In all ASP constraints the embedded PDU constraint is either chained static or "semi-dynamic". That is, the PDU constraint is always fixed to a specific ASP constraint but it (the PDU) may be parameterized.

All ASP constraints have a specific value for its parameter. No matching symbols are used in ASPs.

6.2.4 PDU type constraint declaration

6.2.4.1 ASN.1 PDU type constraint declaration

No ASN.1 PDU type constraint declaration exists in this ATS.

6.2.4.2 TTCN PDU type constraint declaration

PDU constraints are used for assigning values or patterns to the data being sent or received.

6.2.5 Chaining of constraints

6.2.5.1 Static chaining

Static chaining, that is a fixed reference to a specific constraint, is used in this ATS. The static chaining is used for static binding of both variables and sub-structures.

6.2.5.2 Dynamic chaining

Dynamic chaining is achieved when having a reference to a value which is unknown. The only thing known (before run-time) is the type of that reference. The reference is passed as a parameter. Strict dynamic chaining is not used in this ATS. What is used is something that is called "semi-dynamic chaining". The definition of semi-dynamic chaining is that the fixed reference is parameterized with an unknown value. That value is received as a parameter.

Table 12: TTCN ASP constraint declaration A_RST1

TTCN ASP Constraint Declaration		
Constraint Name : A_RST1 (FLAG : INTEGER)		
ASN.1 Type : DL_DAT_IN_RESTARTr		
Derivation Path :		
Comments :		
Parameter Name	Parameter Value	Comments
mun	RST1 (FLAG)	RST1 (FLAG)
Detailed comments :		

Table 12 is an example of semi-dynamic chaining. The TTCN ASP constraint is parameterized with an INTEGER value named FLAG. That value is passed further down in the structure as a parameter to a static named PDU constraint reference.

6.2.6 Derived constraints

No derivation of any constraint is used. All constraints are considered to be base constraints.

6.2.7 Parameterized constraints

Parameterized constraints are used in this ATS.

6.2.8 Value assignment

6.2.8.1 Specific values

For specific value assignment both explicit values and references to explicit values are used.

6.2.8.2 Matching values

As matching values the following mechanisms are used:

Instead of Value:

AnyOrOmit	"**"
AnyValue	"?"
SuperSet	SUPERSET
Omit	"_"

Inside value:

AnyOne	"?"
AnyOrNone	"**"

6.3 Dynamic part

6.3.1 Test cases

Each test case contains the test purpose text from ETS 300 207-5 [4]. To be able to read and understand the test case dynamic behaviour it is recommended that the test steps are understood first.

6.3.2 Test steps

6.3.2.1 PTC1_IN

This test step describes the behaviour of the PTC1 for support of an incoming call at the MTC (served user side). Thus PTC1 is the originator of the call. The PTC1 receives a CM from the MTC in order to send the SETUP message which begins the call establishment. The test step is terminated by receipt of a RELEASE message or by appropriate CM from the MTC.

6.3.2.2 PTC1_OUT

This test step describes the behaviour of the PTC1 for support of an outgoing call at the MTC (served user side). Thus PTC1 is at the destination side of the call. The test step is terminated by receipt of a RELEASE message or by appropriate CM from the MTC.

The behaviour is regulated from the MTC by means of CMs sent via CPA1 co-ordination point. Thus if the PTC is expected to receive a message it receives a CM beforehand telling it what message to expect. On the other hand if the MTC wishes to receive a message from the IUT it may do this by first sending a CM to PTC1. Depending on the contents of the CM PTC1 may then send a message to the IUT eventually provoking the IUT to send a message at the side of the MTC.

6.3.3 Defaults

Note the use of the RETURN statement which is defined in DAM1 of ISO/IEC 9646-3 [8]. This allows valid background behaviour to be handled in the default tree with a possibility to return to the original set of alternatives in the test case.

7 ATS to TP map

The identifiers used for the TPs are reused as test case names. Thus there is a straightforward one-to-one mapping.

8 PCTR conformance

A test laboratory, when requested by a client to produce a PCTR, is required, as specified in ISO/IEC 9646-5 [10], to produce a PCTR conformant with the PCTR template given in annex B of ISO/IEC 9646-5 [10].

Furthermore, a test laboratory, offering testing for the ATS specification contained in annex C, when requested by a client to produce a PCTR, is required to produce a PCTR conformant with the PCTR proforma contained in annex A of this ETS.

A PCTR which conforms to this PCTR proforma specification shall preserve the content and ordering of the clauses contained in annex A. Clause A.6 of the PCTR may contain additional columns. If included, these shall be placed to the right of the existing columns. Text in italics may be retained by the test laboratory.

9 PIXIT conformance

A test realizer, producing an executable test suite for the ATS specification contained in annex C, is required, as specified in ISO/IEC 9646-4 [9], to produce an augmented partial PIXIT proforma conformant with this partial PIXIT proforma specification.

An augmented partial PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The augmented partial PIXIT proforma may contain additional questions that need to be answered in order to prepare the Means Of Testing (MOT) for a particular IUT.

A test laboratory, offering testing for the ATS specification contained in annex C, is required, as specified in ISO/IEC 9646-5 [10], to further augment the augmented partial PIXIT proforma to produce a PIXIT proforma conformant with this partial PIXIT proforma specification.

A PIXIT proforma which conforms to this partial PIXIT proforma specification shall, as a minimum, have contents which are technically equivalent to annex B. The PIXIT proforma may contain additional questions that need to be answered in order to prepare the test laboratory for a particular IUT.

10 ATS conformance

The test realizer, producing MOT and ExTS for this ATS specification, shall comply with the requirements of ISO/IEC 9646-4 [9]. In particular, these concern the realization of an ExTS based on each ATS. The test realizer shall provide a statement of conformance of the MOT to this ATS specification.

An ExTS which conforms to this ATS specification shall contain test groups and test cases which are technically equivalent to those contained in the ATS in annex C. All sequences of test events comprising an abstract test case shall be capable of being realized in the executable test case. Any further checking which the test system might be capable of performing is outside the scope of this ATS specification and shall not contribute to the verdict assignment for each test case.

Test laboratories running conformance test services using this ATS shall comply with ISO/IEC 9646-5 [10].

A test laboratory which claims to conform to this ATS specification shall use an MOT which conforms to this ATS.

Annex A (normative): Protocol Conformance Test Report (PCTR) proforma

Notwithstanding the provisions of the copyright clause related to the text of this ETS, ETSI grants that users of this ETS may freely reproduce the PCTR proforma in this annex so that it can be used for its intended purposes and may further publish the completed PCTR.

A.1 Identification summary

A.1.1 Protocol conformance test report

PCTR number:	
PCTR date:	
Corresponding SCTR number:	
Corresponding SCTR date:	
Test laboratory identification:	
Test laboratory manager:	
Signature:	

A.1.2 IUT identification

Name:	
Version:	
Protocol specification:	ETS 300 207-1
PICS:	
Previous PCTRs (if any):	

A.1.3 Testing environment

PIXIT Reference number:	
ATS Specification:	ETS 300 207-6
Abstract Test Method:	Multi-party test method (see ISO/IEC 9646-2)
Means of Testing identification:	
Dates of testing:	
Conformance log reference(s):	
Retention date for log reference(s):	

A.1.4 Limits and reservations

Additional information relevant to the technical contents or further use of the test report, or to the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.

.....
.....
.....
.....

A.1.5 Comments

Additional comments may be given by either the client or the test laboratory on any of the contents of the PCTR, for example, to note disagreement between the two parties.

.....
.....
.....
.....

A.2 IUT conformance status

This IUT has / has not been shown by conformance assessment to be non-conforming to the specified protocol specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements (as specified in clause A.3 of this report) and there are no "FAIL" verdicts to be recorded (in clause A.6) strike the word "has", otherwise strike the words "has not".

A.3 Static conformance summary

The PICS for this IUT is / is not consistent with the static conformance requirements in the specified protocol.

Strike the appropriate words in this sentence.

A.4 Dynamic conformance summary

The test campaign did / did not reveal errors in the IUT.

Strike the appropriate words in this sentence. If there are no "FAIL" verdicts to be recorded (in clause A.6 of this report) strike the word "did", otherwise strike the words "did not".

Summary of the results of groups of tests:

.....
.....
.....
.....
.....

A.5 Static conformance review report

If clause A.3 indicates non-conformance, this clause itemizes the mismatches between the PICS and the static conformance requirements of the specified protocol specification.

.....

.....

.....

.....

.....

.....

A.6 Test campaign report

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
CDIV_N01_001				
CDIV_N01_002				
CDIV_N01_003				
CDIV_N01_004				
CDIV_N01_005				
CDIV_N02_001				
CDIV_N02_002				
CDIV_N02_003				
CDIV_N02_004				
CDIV_N02_005				
CDIV_N02_006				
CDIV_N02_007				
CDIV_N02_008				
CDIV_N03_CFB_001				
CDIV_N03_CFB_002				
CDIV_N03_CFB_003				
CDIV_N03_CFB_004				
CDIV_N03_CFB_005				
CDIV_N03_CFB_006				
CDIV_N03_CFB_007				
CDIV_N03_CFB_008				
CDIV_N03_CFB_009				
CDIV_N03_CFB_010				
CDIV_N03_CFB_011				
CDIV_N03_CFB_012				
CDIV_N03_CFB_013				
CDIV_N03_CFB_014				
CDIV_N03_CFB_015				
CDIV_N03_CFB_016				
CDIV_N03_CFB_017				
CDIV_N03_CFB_018				
CDIV_N03_CFB_019				
CDIV_N03_CFB_020				
CDIV_N03_CFB_021				
CDIV_N03_CFB_022				
CDIV_N03_CFB_023				
CDIV_N03_CFB_024				

(continued)

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
CDIV_N03_CFNR_001				
CDIV_N03_CFNR_002				
CDIV_N03_CFNR_003				
CDIV_N03_CFNR_004				
CDIV_N03_CFNR_005				
CDIV_N03_CFNR_006				
CDIV_N03_CFNR_007				
CDIV_N03_CFNR_008				
CDIV_N03_CFNR_009				
CDIV_N03_CFNR_010				
CDIV_N03_CFNR_011				
CDIV_N03_CFNR_012				
CDIV_N03_CFNR_013				
CDIV_N03_CFNR_014				
CDIV_N03_CFNR_015				
CDIV_N03_CFNR_016				
CDIV_N03_CFNR_017				
CDIV_N03_CFNR_018				
CDIV_N03_CFNR_019				
CDIV_N03_CFNR_020				
CDIV_N03_CFNR_021				
CDIV_N03_CFNR_022				
CDIV_N03_CFNR_023				
CDIV_N03_CFU_001				
CDIV_N03_CFU_002				
CDIV_N03_CFU_003				
CDIV_N03_CFU_004				
CDIV_N03_CFU_005				
CDIV_N03_CFU_006				
CDIV_N03_CFU_007				
CDIV_N03_CFU_008				
CDIV_N03_CFU_009				
CDIV_N03_CFU_010				
CDIV_N03_CFU_011				
CDIV_N03_CFU_012				
CDIV_N03_CFU_013				
CDIV_N03_CFU_025				
CDIV_N03_CFU_014				
CDIV_N03_CFU_015				
CDIV_N03_CFU_016				
CDIV_N03_CFU_017				
CDIV_N03_CFU_018				
CDIV_N03_CFU_019				
CDIV_N03_CFU_020				
CDIV_N03_CFU_021				
CDIV_N03_CFU_022				
CDIV_N03_CFU_023				
CDIV_N04_CFB_001				
CDIV_N04_CFB_002				
CDIV_N04_CFB_003				
CDIV_N04_CFB_004				
CDIV_N04_CFB_005				
CDIV_N04_CFB_006				
CDIV_N04_CFB_007				
CDIV_N04_CFB_008				
CDIV_N04_CFB_009				

(continued)

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
CDIV_N04_CFB_010				
CDIV_N04_CFB_011				
CDIV_N04_CFB_012				
CDIV_N04_CFB_013				
CDIV_N04_CFB_014				
CDIV_N04_CFB_015				
CDIV_N04_CFB_016				
CDIV_N04_CFB_017				
CDIV_N04_CFB_018				
CDIV_N04_CFB_019				
CDIV_N04_CFNR_001				
CDIV_N04_CFNR_002				
CDIV_N04_CFNR_003				
CDIV_N04_CFNR_004				
CDIV_N04_CFNR_005				
CDIV_N04_CFNR_006				
CDIV_N04_CFNR_007				
CDIV_N04_CFNR_008				
CDIV_N04_CFNR_009				
CDIV_N04_CFNR_010				
CDIV_N04_CFNR_011				
CDIV_N04_CFNR_012				
CDIV_N04_CFNR_013				
CDIV_N04_CFNR_014				
CDIV_N04_CFNR_015				
CDIV_N04_CFNR_016				
CDIV_N04_CFNR_017				
CDIV_N04_CFNR_018				
CDIV_N04_CFNR_019				
CDIV_N04_CFU_001				
CDIV_N04_CFU_002				
CDIV_N04_CFU_003				
CDIV_N04_CFU_004				
CDIV_N04_CFU_005				
CDIV_N04_CFU_006				
CDIV_N04_CFU_007				
CDIV_N04_CFU_008				
CDIV_N04_CFU_009				
CDIV_N04_CFU_010				
CDIV_N04_CFU_011				
CDIV_N04_CFU_012				
CDIV_N04_CFU_013				
CDIV_N04_CFU_014				
CDIV_N04_CFU_015				
CDIV_N04_CFU_016				
CDIV_N04_CFU_017				
CDIV_N04_CFU_018				
CDIV_N04_CFU_019				
CDIV_N05_001				
CDIV_N05_002				
CDIV_N05_003				
CDIV_N05_004				
CDIV_N05_005				
CDIV_N05_006				
CDIV_N05_007				
CDIV_N06_CFB_001				

(continued)

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
CDIV_N06_CFB_002				
CDIV_N06_CFB_003				
CDIV_N06_CFB_004				
CDIV_N06_CFB_005				
CDIV_N06_CFB_006				
CDIV_N06_CFB_007				
CDIV_N06_CFB_008				
CDIV_N06_CFB_009				
CDIV_N06_CFB_010				
CDIV_N06_CFB_011				
CDIV_N06_CFB_012				
CDIV_N06_CFB_013				
CDIV_N06_CFNR_001				
CDIV_N06_CFNR_002				
CDIV_N06_CFNR_003				
CDIV_N06_CFNR_004				
CDIV_N06_CFNR_005				
CDIV_N06_CFNR_006				
CDIV_N06_CFNR_007				
CDIV_N06_CFNR_008				
CDIV_N06_CFNR_009				
CDIV_N06_CFNR_010				
CDIV_N06_CFNR_011				
CDIV_N06_CFNR_012				
CDIV_N06_CFNR_013				
CDIV_N06_CFU_001				
CDIV_N06_CFU_002				
CDIV_N06_CFU_003				
CDIV_N06_CFU_004				
CDIV_N06_CFU_005				
CDIV_N06_CFU_006				
CDIV_N06_CFU_007				
CDIV_N06_CFU_008				
CDIV_N06_CFU_009				
CDIV_N06_CFU_010				
CDIV_N06_CFU_011				
CDIV_N06_CFU_012				
CDIV_N06_CFU_013				
CDIV_N07_001				
CDIV_N07_002				
CDIV_N07_003				
CDIV_N07_004				
CDIV_N07_005				
CDIV_N07_006				
CDIV_N07_007				
CDIV_N07_008				
CDIV_N07_009				
CDIV_N08_001				
CDIV_N08_002				
CDIV_N08_003				
CDIV_N08_004				
CDIV_N08_005				
CDIV_N08_006				
CDIV_N08_007				
CDIV_N08_008				
CDIV_N08_009				

(continued)

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
CDIV_N09_001				
CDIV_N09_002				
CDIV_N09_003				
CDIV_N10_001				
CDIV_N10_002				
CDIV_N10_003				
CDIV_N10_004				
CDIV_N10_005				
CDIV_N10_006				
CDIV_N10_007				
CDIV_N10_008				
CDIV_N10_009				
CDIV_N10_010				
CDIV_N10_011				
CDIV_N11_001				
CDIV_N11_002				
CDIV_N11_003				
CDIV_N11_004				
CDIV_N11_005				
CDIV_N11_006				
CDIV_N11_007				
CDIV_N11_008				
CDIV_N11_009				
CDIV_N11_010				
CDIV_N11_011				
CDIV_N11_012				
CDIV_N11_013				
CDIV_N11_014				
CDIV_N11_015				
CDIV_N11_016				
CDIV_N11_017				
CDIV_N11_018				
CDIV_N11_019				
CDIV_N11_020				
CDIV_N11_021				
CDIV_N11_022				
CDIV_N11_023				
CDIV_N11_024				
CDIV_N11_026				
CDIV_N11_027				
CDIV_N11_028				
CDIV_N11_029				
CDIV_N11_030				
CDIV_N11_031				
CDIV_N11_032				
CDIV_N11_033				
CDIV_N11_035				
CDIV_N11_036				
CDIV_N11_037				
CDIV_N11_038				
CDIV_N11_039				
CDIV_N11_040				
CDIV_N11_041				
CDIV_N11_042				
CDIV_N11_044				
CDIV_N11_045				

(continued)

ATS reference	Selected? (Y/N)	Run? (Y/N)	Verdict	Observations
CDIV_N11_046				
CDIV_N11_047				
CDIV_N11_048				
CDIV_N11_049				
CDIV_N11_050				
CDIV_N11_051				
CDIV_N11a_025				
CDIV_N11a_034				
CDIV_N11a_043				
CDIV_N12_001				
CDIV_N13_001				
CDIV_N13_002				
CDIV_N13_003				
CDIV_N13_004				
CDIV_N13_005				
CDIV_N13_006				
CDIV_N14_001				
CDIV_N14_002				
CDIV_N14_003				
CDIV_N14_004				
CDIV_N14_005				
CDIV_N14_006				
CDIV_N14_007				
CDIV_N14_008				
CDIV_N14_009				
CDIV_N14_010				
CDIV_N14_011				
CDIV_N14_012				
CDIV_N14_013				
CDIV_N14_014				
CDIV_N14_015				
CDIV_N14_016				
CDIV_N14_017				
CDIV_N15_001				
CDIV_N15_002				
CDIV_N15_003				
CDIV_N15_004				
CDIV_N15_005				
CDIV_N15_006				
CDIV_N15_007				
CDIV_N15_008				
CDIV_N15_009				
CDIV_N15_010				
CDIV_N15_011				
CDIV_N16_001				
CDIV_N16_002				
CDIV_N17_001				
CDIV_N17_002				
CDIV_N17_003				
CDIV_N17_004				
CDIV_N17_005				
CDIV_N17_006				
CDIV_N17_007				
CDIV_N17_008				
CDIV_N17_009				
CDIV_N17_010				

(continued)

Annex B (normative): Partial PIXIT proforma

Notwithstanding the provisions of the copyright clause related to the text of this ETS, ETSI grants that users of this ETS may freely reproduce the partial PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

B.1 Identification summary

PIXIT number:

.....

Test laboratory name:

.....

Date of issue:

.....

Issued to:

.....

B.2 Abstract test suite summary

Protocol specification: ETS 300 207-1

ATS specification: ETS 300 207-6

Abstract test method: Multi-party test method (see ISO/IEC 9646-2)

B.3 Test laboratory

Test laboratory identification:

.....

Accreditation status of the test service:

.....

Accreditation reference:

.....

Test laboratory manager:

.....

Test laboratory contact:

.....

Means of testing:

.....

Test laboratory instructions for completion:

.....

B.4 Client (of the test laboratory)

Client identification:

.....

Client test manager:

.....

Client contact:

.....

Test facilities required:

.....

B.5 System Under Test (SUT)

Name:

.....

Version:

.....

SCS reference:

.....

Machine configuration:

.....

Operating system identification:

.....

IUT identification:

.....

PICS (all layers):

.....

.....

Limitations of the SUT:

.....

Environmental conditions:

.....

B.6 Protocol information

B.6.1 Protocol identification

Specification reference: ETS 300 207-1

Protocol version:

PICS reference:

NOTE: The PICS reference should reference a completed PICS which is conformant with the PICS proforma contained in ETS 300 207-2.

B.6.2 Parameter values

Table B.1: Configuration aspects

Item	Question	Supported? (Y/N)	Allowed values	Value
1.1	Does the IUT support Basic Access?		N/A	N/A
1.2	What length of Call Reference is used?		1, 2	
1.3	Does the IUT support MSN?		N/A	N/A
1.4	Does the IUT support DDI?		N/A	N/A
1.5	Does the IUT support SUB?		N/A	N/A
1.6	Does the IUT support CLIP?		N/A	N/A
1.7	Does the IUT support COLR?		N/A	N/A
1.8	Does the IUT support UUS?		N/A	N/A

B.6.3 Configuration of IUT

Table B.2: Actions required to configure the IUT

Item	Action: What actions, if possible, have to be taken to configure the IUT ...	Supported? (Y/N)	Stimulus (action taken)
2.1	for GFP/status notification and subscription to the whole access		
2.2	for GFP/status notification and subscription on a per number basis		
2.3	so that the subscription option for the use of all numbers is no		
2.4	for primary rate access or basic access point to point, subscription to the whole access		
2.5	for primary rate access or basic access point to point, subscription on a per number basis		
2.6	for primary rate access or basic access point to point, subscription on a per number basis and the subscription option for the use of all numbers is "yes"		
2.7	so that CFB is not subscribed to		
2.8	so that CFNR is not subscribed to		
2.9	so that CFU is not subscribed to		

(continued)

Table B.2 (concluded): Actions required to configure the IUT

Item	Action: What actions, if possible, have to be taken to configure the IUT ...	Supported? (Y/N)	Stimulus (action taken)
2.10	so that a requested supplementary service is not available for the basic service		
2.11	to respond with "resourceUnavailable" when a call forwarding service is invoked		
2.12	so that the subscription option for activation, deactivation and interrogation, all ISDN numbers on the same access, is "yes"		
2.13	so that the requested interrogation information is not available		
2.14	so that the data provided by the network exceeds the maximum allowed length for a message (in response to an interrogation)		
2.15	so that the subscription option "served user receives notification that a call has been forwarded" is "yes, with call offering information"		
2.16	so that presentation of the calling address is not restricted		
2.17	so that the calling address is not available due to interworking		
2.18	so that the network provider option "served user call retention on invocation of diversion" is "clear call on invocation"		
2.19	so that the network provider option "served user call retention on invocation of diversion" is "retain call until alerting begins at diverted-to user"		
2.20	so that Call Deflection is not subscribed to		
2.21	so that Call Deflection is not available for any basic service		
2.22	so that the limit on the number of diversions is 1		
2.23	for the subscription option "served user receives reminder notification in outgoing calls that forwarding is currently activated" is "yes"		
2.24	so that the diverted to number is "not available" due to interworking		
2.25	so that on receipt of a SETUP message, it sends a CallRerouting invoke component		
2.26	so that a forwarded call will encounter interworking		
2.27	so that the served user subscription option "calling user is notified of diversion" is "yes, with diverted-to number"		
2.28	so that the subscription option "calling user is notified of diversion" is yes, without diverted to number"		
2.29	so that the subscription option "calling user is notified of diversion" is "no"		
2.30	so that for COLR, presentation is not allowed		
2.31	so that the user connected to the access related to the MTC is considered as being network determined user busy		

B.6.4 Parameter values

Table B.3: Parameter values

Item	Give an example of ...	Supported? (Y/N)	Allowed values	Value
3.1	an ISDN number, provided to identify the served user, that is not a valid number		N/A	
3.2	a basic service to which the served user has not subscribed			
3.3	an invalid diverted-to number			
3.4	a special service number to which forwarding is prohibited			
3.5	a coding of a compatible Bearer capability for use in the CallRerouteing component			
3.6	a coding of a compatible High layer compatibility for use in the CallRerouteing component			
3.7	a coding of a compatible low layer compatibility for use in the CallRerouteing component			
3.8	a Called party subaddress information element, which the IUT is compatible with			
3.9	a basic service to which the served user has subscribed			

B.6.5 Timer values

Table B.4: Timer values

Item	Timer duration	Supported? (Y/N)	Allowed values	Value
4.1	T-CFNR duration in s?		N/A	

B.6.6 State events

Table B.5: State events

Item	Question: When the IUT is in ...	Supported? (Y/N)	Allowed values	Value
5.1	state N07, and T-CFNR has expired, in what state must the diverted to network be, before the IUT sends a DISCONNECT or RELEASE message with cause 31		N07, N08, N10	
5.2	state N07, and the call is deflected, in which state is the deflected-to network when the call to the served-user is cleared by a DISCONNECT or RELEASE message		N07, N08, N10	
5.3	state N09, and the call is deflected, in which state is the deflected-to network when the call to the served-user is cleared by a DISCONNECT or RELEASE message		N07, N08, N10	
5.4	state N10, and the call is deflected, in which state is the deflected-to network when the call to the served-user is cleared by a DISCONNECT or RELEASE message		N07, N08, N10	

B.6.7 Interactions

Table B.6: Interactions

Item	Action: Does the IUT ...	Supported? (Y/N)	Stimulus (action taken)
6.1	on sending a SETUP message containing UUI to a user which does not support UUS, and the called user diverts the call after an alerting message has been received, send a CallRerouting error component indicating "supplementaryServiceInteraction not allowed"?		

B.7 Basic call PIXIT items

B.7.1 Parameter Values - Information element codings

Table B.7: Codings of information elements

Item	Information element: provide, if possible, ...	Supported? (Y/N)	Value
N1.1	a coding of a Bearer Capability information element, which the IUT is compatible with, for the purpose of accepting received SETUP messages and which may be used in SETUP messages to be transmitted		
N1.2	a coding of a High layer compatibility information element, which the IUT is compatible with, for the purpose of accepting received SETUP messages and which may be used in SETUP messages to be transmitted		
N1.3	a coding of a Low layer compatibility information element, which the IUT is compatible with, for the purpose of accepting received SETUP messages and which may be used in SETUP messages to be transmitted		
N1.4	a Called party number information element, which the IUT is compatible with, for ...		
N1.4.1	served user access		
N1.4.2	first remote user access		
N1.4.3	second remote user access		
N1.4.4	third remote user access		
N1.5	preferred channel number to be used for the purpose of accepting received SETUP messages, for ... (note 1)		
N1.5.1	single call at served user side		
N1.5.2	second call at served user side		
N1.5.3	first call at remote user side		
N1.5.4	second call at remote user side		
N1.5.5	third call at remote user side		
NOTE 1:	Items N1.5.1 to N1.5.5 are applicable for primary rate access only.		
NOTE 2:	As this is a general table used for all supplementary services, all items N1.4.1 to N1.4.4, and N1.5.1 to N1.5.5 (if primary rate access is supported), are not always required, but should be supplied if possible.		

Annex C (normative): Abstract Test Suite (ATS)

This ATS has been produced using the Tree and Tabular Combined Notation (TTCN) according to ISO/IEC 9646-3 [8].

The ATS was developed on a separate TTCN software tool and therefore the TTCN tables are not completely referenced in the contents table. The ATS itself contains a test suite overview part which provides additional information and references (see also annex D).

C.1 The TTCN Graphical form (TTCN.GR)

The TTCN.GR representation of this ATS is contained in a Postscript file (CDIV_N08.PS¹⁾) which accompanies this ETS.

C.2 The TTCN Machine Processable form (TTCN.MP)

The TTCN.MP representation corresponding to this ATS is contained in an ASCII file (CDIV_N08.MP¹⁾) which accompanies this ETS.

NOTE: According to ISO/IEC 9646-3 [8], in case of a conflict in interpretation of the operational semantics of TTCN.GR and TTCN.MP, the operational semantics of the TTCN.GR representation takes precedence.

1) This file is located in an archive file named 2076_EP.LZH. Other file formats are available on request.

Annex D (informative): General structure of ATS

This annex gives a simple listing of the order of types of tables which appear in a typical supplementary service ATS. This is intended as an aid in helping readers find particular sections quickly.

Test Suite Overview

Test Suite Structure

Test Case Index

Test Step Index

Default Index

Declarations Part

Simple Type Definitions

Structured Type Definitions

ASN.1 Type Definitions

Test Suite Operation Definitions

Test Suite Parameter Declarations

Test Case Selection Expression Definitions

Test Suite Constant Declarations

Test Case Variable Declarations

PCO Declarations

Co-ordination Point Declarations

Timer Declarations

Test Component Declarations

Test Components Configuration Declarations

TTCN ASP Type Definition

TTCN PDU Type Definition

TTCN CM Type Definition

Alias Definitions

Constraints Part

Structured Type Constraint Declarations

ASN.1 Type Constraint Declarations

TTCN ASP Constraint Declarations

TTCN PDU Constraint Declarations

TTCN CM Constraint Declarations

Dynamic Part

Test Case Dynamic Behaviour

Test Step Dynamic Behaviour

Default Dynamic Behaviour

History

Document history	
July 1996	Public Enquiry PE 110: 1996-07-22 to 1996-11-15