

**Universal Mobile Telecommunications System (UMTS);
Typical examples of Radio Access Bearers (RABs)
and Radio Bearers (RBs) supported by
Universal Terrestrial Radio Access (UTRA)
(3GPP TR 25.993 version 6.4.0 Release 6)**



Reference

RTR/TSGR-0225993v640

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.org

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2003.
All rights reserved.

DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the TIPHON logo are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	12
1 Scope	13
2 References	13
3 Abbreviations and Terms	15
3.1 Abbreviations	15
3.2 Terms.....	15
4 QoS Architecture and RAB attributes	15
5 List of RABs and SRBs.....	17
6 Combinations of RABs	19
7 Examples of Radio Bearers and Signalling Radio Bearers for FDD.....	26
7.1 Combinations on DPCH.....	26
7.1.1 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH	26
7.1.2 Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH	26
7.1.3 Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH	26
7.1.4 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	26
7.1.5 Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.6 Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.7 Conversational / speech / UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	27
7.1.8 Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.9 Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.10 Conversational / speech / UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) kbps / CS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.11 Conversational / speech / UL:6.7 DL:6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.12 Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	28
7.1.13 Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH.....	28
7.1.14 Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH.....	28
7.1.15 Conversational / unknown / UL:28.8/DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	28
7.1.16 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	28
7.1.17 Conversational / unknown / UL:32 DL:32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	28
7.1.18 Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	29
7.1.19 Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	29
7.1.20 Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	29
7.1.21 Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	29
7.1.22 Streaming / unknown / UL:64 DL:0 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	29
7.1.23 Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	29
7.1.24 Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	30
7.1.25 Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	30
7.1.26 Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	30
7.1.27 Interactive or background / UL:32 DL:32 kbps / PS RAB (20 ms TTI)+ UL:3.4 DL:3.4 kbps SRBs for DCCH	30
7.1.28 Interactive or background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	30
7.1.29 Interactive or background / UL:32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	30
7.1.30 Interactive or background / UL:64 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	31
7.1.31 Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	31
7.1.32 Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	31
7.1.33 Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH.....	31

7.1.34	Interactive or background / UL:144 DL:144 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH	31
7.1.35	Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH	31
7.1.35.1	On DPCH	31
7.1.35.2	On PDSCH and DPCH	32
7.1.36	Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH	32
7.1.36.1	On DPCH	32
7.1.36.2	On PDSCH and DPCH	32
7.1.37	Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	32
7.1.38	Interactive or background / UL:384 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	32
7.1.39	Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	32
7.1.39.1	On DPCH	32
7.1.39.2	On PDSCH and DPCH	33
7.1.40	Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	33
7.1.41	Interactive or background / UL:384 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	33
7.1.42	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	33
7.1.43	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	33
7.1.44	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	34
7.1.45	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	34
7.1.45a	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB (20ms TTI)+ UL:3.4 DL:3.4 kbps SRBs for DCCH	34
7.1.45a.1	Uplink	34
7.1.45a.1.1	Transport channel parameters	34
7.1.45a.1.2	Physical channel parameters	35
7.1.45a.2	Downlink	35
7.1.45a.2.1	Transport channel parameters	35
7.1.45a.2.2	Physical channel parameters	35
7.1.46	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	36
7.1.47	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	36
7.1.48	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	36
7.1.49	Conversational / speech / UL: (12.2 7.95 5.9 4.75) kbps DL: (12.2 7.95 5.9 4.75) / CS RAB + Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	36
7.1.50	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	36
7.1.51	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	36
7.1.52	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	37
7.1.53	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH	37
7.1.54	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH	37
7.1.55	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	37
7.1.56	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	37
7.1.56.1	On DPCH	37
7.1.56.2	On PDSCH and DPCH	38
7.1.57	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	38
7.1.57.1	On DPCH	38
7.1.57.2	On PDSCH and DPCH	38

7.1.58	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	38
7.1.59	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	38
7.1.60	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	39
7.1.61	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	39
7.1.62	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	39
7.1.63	Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	39
7.1.64	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	39
7.1.65	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	39
7.1.66	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	40
7.1.67	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	40
7.1.68	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	40
7.1.69	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	40
7.1.70	Interactive or background / UL:64 DL:128 kbps / PS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	40
7.1.71	Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	41
7.1.72	Interactive or background / UL:64 DL:64 kbps / PS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	41
7.1.73	Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	41
7.1.73a	Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH – Alternative.....	41
7.1.73a.1	Uplink	41
7.1.73a.2	Downlink.....	42
7.1.74	Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	43
7.1.74.1	Uplink	43
7.1.74.1.1	Transport channel parameters.....	43
7.1.74.1.2	Physical channel parameters.....	43
7.1.74.2	Downlink.....	44
7.1.74.2.1	Transport channel parameters.....	44
7.1.75	Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	45
7.1.75.1	Uplink	45
7.1.75.1.1	Transport channel parameters.....	45
7.1.75.1.2	Physical channel parameters.....	46
7.1.75.2	Downlink.....	46
7.1.75.2.1	Transport channel parameters.....	46
7.1.75.2.2	Physical channel parameters.....	47
7.1.76	Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	47
7.1.76.1	Uplink	47
7.1.76.1.1	Transport channel parameters.....	47
7.1.76.1.2	Physical channel parameters.....	48
7.1.76.2	Downlink.....	48
7.1.76.2.1	Transport channel parameters.....	48
7.1.76.2.2	Physical channel parameters.....	49
7.1.77	Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	49
7.1.77.1	Uplink	50

7.1.77.1.1	Transport channel parameters.....	50
7.1.77.1.2	Physical channel parameters.....	50
7.1.77.2	Downlink.....	51
7.1.77.2.1	Transport channel parameters.....	51
7.1.77.2.2	Physical channel parameters.....	51
7.1.78	Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	52
7.1.78.1	Uplink	52
7.1.78.1.1	Transport channel parameters.....	52
7.1.78.1.2	Physical channel parameters.....	53
7.1.78.2	Downlink.....	53
7.1.78.2.1	Transport channel parameters.....	53
7.1.78.2.2	Physical channel parameters.....	54
7.1.79	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	54
7.1.79.1	Uplink	54
7.1.79.1.1	Transport channel parameters.....	54
7.1.79.1.2	Physical channel parameters.....	55
7.1.79.2	Downlink.....	55
7.1.79.2.1	Transport channel parameters.....	55
7.1.79.2.2	Physical channel parameters.....	56
7.1.80	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	56
7.1.80.1	Uplink	56
7.1.80.1.1	Transport channel parameters.....	56
7.1.80.1.2	Physical channel parameters.....	56
7.1.80.2	Downlink.....	57
7.1.80.2.1	Transport channel parameters.....	57
7.1.80.2.2	Physical channel parameters.....	57
7.1.81	Streaming / unknown / UL:8 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	57
7.1.81.1	Uplink	58
7.1.81.1.1	Transport channel parameters.....	58
7.1.81.1.2	Physical channel parameters.....	58
7.1.81.2	Downlink.....	59
7.1.81.2.1	Transport channel parameters.....	59
7.1.81.2.2	Physical channel parameters.....	59
7.1.82	Streaming / unknown / UL:8 DL:32 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	59
7.1.82.1	Uplink	60
7.1.82.1.1	Transport channel parameters.....	60
7.1.82.1.2	Physical channel parameters.....	60
7.1.82.2	Downlink.....	61
7.1.82.2.1	Transport channel parameters.....	61
7.1.82.2.2	Physical channel parameters.....	61
7.1.83	Streaming / unknown / UL:32 DL:256 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	62
7.1.83.1	Uplink	62
7.1.83.1.1	Transport channel parameters.....	62
7.1.83.1.2	Physical channel parameters.....	63
7.1.83.2	Downlink.....	63
7.1.83.2.1	Transport channel parameters.....	63
7.1.83.2.2	Physical channel parameters.....	64
7.1.84	Interactive or background / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	64
7.1.84.1	Uplink	64
7.1.84.1.1	Transport channel parameters.....	64
7.1.84.1.2	Physical channel parameters.....	65
7.1.84.2	Downlink.....	65
7.1.84.2.1	Transport channel parameters.....	65

7.1.84.2.2	Physical channel parameters.....	65
7.1.85	Interactive or background / UL:64 DL:8 kbps / PS RAB + Interactive or Background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	66
7.1.85.1	Uplink	66
7.1.85.2	Downlink.....	66
7.1.86	Interactive or Background / UL:64 DL:128 kbps / PS RAB + Interactive or Background / UL:64 DL:128 kbps / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH.....	66
7.1.86.1	Uplink	66
7.1.86.2	Downlink.....	66
7.1.86.2.1	Transport channel parameters.....	66
7.1.86.2.2	Physical channel parameters.....	67
7.1.87	Interactive or Background / UL:64 DL:384 kbps / PS RAB + Interactive or Background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	67
7.1.87.1	Uplink	67
7.1.87.2	Downlink.....	68
7.1.87.2.1	Transport channel parameters.....	68
7.1.87.2.2	Physical channel parameters.....	68
7.1.88	Interactive or background / UL:128 DL:128 kbps / PS RAB + Interactive or Background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	68
7.1.88.1	Uplink	69
7.1.88.1.1	Transport channel parameters.....	69
7.1.88.1.1.1	Transport channel parameters for Interactive or Background / UL:128 + UL:128 kbps / PS RAB	69
7.1.88.1.2	Physical channel parameters.....	69
7.1.88.2	Downlink.....	70
7.1.88.2.1	Transport channel parameters.....	70
7.1.88.2.2	Physical channel parameters.....	70
7.1.89	Interactive or background / UL:128 DL:32 kbps / PS RAB + Interactive or Background / UL:128 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	70
7.1.89.1	Uplink	71
7.1.89.2	Downlink.....	71
7.1.89.2.1	Transport channel parameters.....	71
7.1.89.2.2	Physical channel parameters.....	71
7.1.90	Streaming / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	72
7.1.91	Streaming / unknown / UL:16 DL:32 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	72
7.1.92	Interactive or background / UL:16 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	72
7.1.93	Interactive or background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	72
7.1.94	Interactive or background / UL:16 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	73
7.1.95	Conversational / speech / UL:12.2 DL:12.2 kbps + Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	73
7.1.95.1	Uplink	73
7.1.95.2	Downlink.....	74
7.1.96	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:128 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	75
7.1.96.1	Uplink	75
7.1.96.2	Downlink.....	76
7.1.97	Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH.....	77
7.2	Combinations on S-CCPCH.....	77
7.2.1	Stand-alone signalling RB for PCCH	77
7.2.2	Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH	77
7.2.3	Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH.....	77
7.2.4	Interactive/Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH.....	78
7.2.5	16 kbps RB for CTCH + SRB for CCCH + SRB for BCCH.....	78
7.2.6	RB for CTCH + Interactive/Background 32 kbps PS RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH.....	78

7.2.7	Interactive/Background 16 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH.....	80
7.2.7.1	Transport channel parameters	80
7.2.7.1.1	Transport channel parameters for Interactive/Background 16 kbps PS RAB.....	80
7.2.7.1.2	Transport channel parameters of SRBs for CCCH, SRB for DCCH, and SRB for BCCH	80
7.2.7.1.3	TFCS	81
7.2.7.2	Physical channel parameters	81
7.2.8	8 kbps RB for CTCH + SRB for CCCH + SRB for BCCH	81
7.2.8.1	Transport channel parameters	81
7.2.8.1.1	Transport channel parameters of 8 kbps RB for CTCH	81
7.2.8.1.2	Transport channel parameters of SRB for CCCH and SRB for BCCH.....	82
7.2.8.1.3	TFCS	82
7.2.8.2	Physical channel parameters	82
7.3	Combinations on PRACH	82
7.3.1	Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH	82
7.3.2	Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH.....	82
8	Examples of Radio Bearers and Signalling Radio Bearers for 3.84 Mcps TDD.....	83
8.1	Combinations on DPCH.....	83
8.1.1	Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH	83
8.1.2	Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH	83
8.1.3	Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH	83
8.1.4	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH.....	83
8.1.5	Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 kbps SRBs for DCCH	83
8.1.6	Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	83
8.1.7	Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	84
8.1.8	Conversational / speech / UL:6.7 DL: 6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	84
8.1.9	Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	84
8.1.10	Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH.....	84
8.1.11	Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH.....	84
8.1.12	Conversational / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	84
8.1.13	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	85
8.1.14	Conversational / unknown / UL:32 DL: 32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	85
8.1.15	Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	85
8.1.16	Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	85
8.1.17	Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH.....	85
8.1.18	Streaming / unknown / UL:0 DL: 64 kbps / CS or PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH.....	85
8.1.19	Streaming / unknown / UL: 64 DL:0 kbps / CS or PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH.....	86
8.1.20	Interactive or background / UL: 32 DL:8 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH	86
8.1.21	Interactive or background / UL: 64 DL: 8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	86
8.1.22	Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	86
8.1.23	Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH	86
8.1.24	Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	87
8.1.25	Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	87
8.1.26	Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	87
8.1.27	Interactive or background / UL: 144 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	87
8.1.28	Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	87
8.1.29	Interactive or background / UL: 64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	87
8.1.30	Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	88
8.1.31	Interactive or background / UL:384 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	88
8.1.32	Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	88
8.1.33	Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	88
8.1.34	Interactive or background / UL: 384 DL:2048 kbps / PS RAB+UL:3.4 DL:3.4 kbps SRBs for DCCH.....	88
8.1.35	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	89
8.1.36	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	89
8.1.37	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	89

8.1.38	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	89
8.1.39	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	89
8.1.40	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	90
8.1.41	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	90
8.1.42	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	90
8.1.43	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	90
8.1.44	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	90
8.1.45	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	91
8.1.46	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	91
8.1.47	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	91
8.1.48	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	91
8.1.49	Interactive or background / UL:64 DL:128 kbps / PS RAB + streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	91
8.2	Combinations on PDSCH, SCCH, PUSCH and PRACH.....	92
8.2.1	Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	92
8.2.2	Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	92
8.2.3	Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	92
8.3	Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH	93
8.3.1	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	93
8.3.2	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	93
8.3.3	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	93
8.4	Combinations on SCCPCH	93
8.4.1	Stand – alone signalling RB for PCCH	93
8.4.2	Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH	94
8.4.3	Interactive / Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH	94
8.5	Combinations on PRACH	94
8.5.1	SRB for CCCH + SRB for DCCH.....	94
9	Examples of Radio Bearers and Signalling Radio Bearers for 1.28 Mcps TDD.....	94
9.1	Combinations on DPCH.....	94
9.1.1	Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH	94
9.1.2	Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH	94
9.1.3	Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH	94
9.1.4	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH.....	95
9.1.5	Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 kbps SRBs for DCCH	95
9.1.6	Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	95
9.1.7	Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	95
9.1.8	Conversational / speech / UL:6.7 DL: 6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	95
9.1.9	Conversational / speech / UL:5.9 DL:5.9 kbps / CS rab + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	95
9.1.10	Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH.....	96
9.1.11	Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH.....	96

9.1.12	Conversational / unknown / UL:28.8 DL:28.8kbps / CS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH.....	96
9.1.13	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	96
9.1.14	Conversational / unknown / UL:32 DL: 32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	96
9.1.15	Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	96
9.1.16	Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	97
9.1.17	Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH.....	97
9.1.18	Streaming / unknown / UL:0 DL: 64 kbps / CS or PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	97
9.1.19	Streaming / unknown / UL: 64 DL:0 kbps / CS or PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	97
9.1.20	Interactive or background / UL: 32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	97
9.1.21	Interactive or background / UL: 64 DL: 8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	97
9.1.22	Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	98
9.1.23	Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH	98
9.1.24	Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	98
9.1.25	Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	98
9.1.26	Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	98
9.1.27	Interactive or background / UL: 144 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	98
9.1.28	Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	99
9.1.29	Interactive or background / UL: 64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	99
9.1.30	Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	99
9.1.31	Interactive or background / UL:384 DL:384 kbps / PS RAB +UL:3.4 DL:3.4 kbps SRBs for DCCH	99
9.1.32	Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	99
9.1.33	Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	100
9.1.34	Interactive or background / UL: 384 DL:2048 kbps / PS RAB+UL:3.4 DL:3.4 kbps SRBs for DCCH ..	100
9.1.35	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	100
9.1.36	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	100
9.1.37	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	100
9.1.38	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	101
9.1.39	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	101
9.1.40	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	101
9.1.41	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	101
9.1.42	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	101
9.1.43	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	102
9.1.44	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	102
9.1.45	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	102
9.1.46	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	102
9.1.47	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	102
9.1.48	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	103
9.1.49	Interactive or background / UL:64 DL:128 kbps / PS RAB + streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH.....	103
9.2	Combinations on PDSCH, SCCH, PUSCH and PRACH.....	103
9.2.1	Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	103
9.2.2	Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	103
9.2.3	Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	103

9.3	Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH	104
9.3.1	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	104
9.3.2	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	104
9.3.3	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	104
9.4	Combinations on SCCPCH	105
9.4.1	Stand – alone signalling RB for PCCH	105
9.4.2	Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH	105
9.4.3	Interactive / Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH	105
9.5	Combinations on PRACH	105
9.5.1	SRB for CCCH + SRB for DCCH.....	105
Annex A:	Service scenarios	106
A.1	Common characteristics of scenarios	107
A.1.1	RTP and RTCP streams	107
A.1.2	Signalling stream	108
A.1.3	Data stream	108
A.2	Scenarios	108
A.2.1	Speech.....	108
A.2.2	Audio	109
A.2.3	Video	109
A.2.4	Text.....	109
A.2.5	Speech and video	109
A.2.6	Audio and video.....	109
A.2.7	Video, audio, or speech with text.....	109
Annex B:	Mapping of service scenarios to Radio Access Bearers.....	110
B.1	Common requirements	110
B.2	Bearer characteristics	110
B.3	RAB Scenarios	111
Annex C:	Change history	112
History		113

Foreword

This Technical Report (TR) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document provides a list of examples of RABs and RAB combinations which are supported by UTRA with examples of radio interface mapping for these RABs onto Radio Bearers and Signalling Radio Bearers.

This list of examples describes typical parameters, and should only be understood as possible configurations i.e. any other configuration supported by the Core Specifications and consistent with a given UE capability shall also be supported by this UE.

The present document addresses the FDD mode as well as the TDD mode.

This report is a release independent report. This means that the latest release applicable to 3GPP is the reference that this TR is defined upon, and contains information on all previous releases. Actual release where a given example applies is indicated in the relevant section.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 34.108: "Common Test Environments for User Equipment (UE) Conformance Testing"
- [2] 3GPP TS 23.107: "Quality of Service (QoS) concept and architecture".
- [3] 3GPP TS 25.212: "Multiplexing and channel coding (FDD)".
- [4] 3GPP TS 25.322: "RLC Protocol Specification".
- [5] 3GPP TS 25.323: "PDCP Protocol Specification".
- [6] 3GPP TS 25.331: "Radio Resource Control (RRC); protocol specification".
- [7] IETF RFC 2507: "IP Header Compression".
- [8] 3GPP TS 25.306: "UE Radio Access Capabilities"
- [9] IETF RFC 3095: "RObust Header Compression (ROHC): Framework and four profiles: RTP, UDP, ESP, and uncompressed".
- [10] 3GPP TS 26.236: "Packet switched conversational multimedia applications; Transport protocols"
- [11] 3GPP TS 26.234: "Transparent end-to-end packet switched streaming service (PSS); Protocols and codecs"
- [12] IETF RFC1889: "RTP: A Transport Protocol for Real-Time Applications"
- [13] IETF RFC3267: "Real-Time Transport Protocol (RTP) Payload Format and File Storage Format for the Adaptive Multi-Rate (AMR) and Adaptive Multi-Rate Wideband (AMR-WB) Audio Codecs"
- [14] 3GPP TR 26.937: "Transparent end-to-end packet switched streaming service (PSS); RTP usage model"

- [15] 3GPP TS 26.235: "Packet switched conversational multimedia applications; Default codecs"
- [16] IETF RFC2793: "RTP Payload for Text Conversation"

3 Abbreviations and Terms

3.1 Abbreviations

For the purposes of the present document, the abbreviations contained in TR 21.905 apply, as well as the following:

DL	Downlink.
HC	Header Compression
IETF	Internet Engineering Task Force
I/B	Interactive / Background
IP	Internet Protocol
kbps	kilo-bits per second.
RAB	Radio Access Bearer.
RB	Radio Bearer
RNC	Radio Network Controller
ROHC	Robust Header Compression
RT	Real-time.
RTP	Real-time Transport Protocol
RTCP	Real-time Transport Control Protocol
RTSP	Real-time Streaming Protocol
SIP	Session Initiation Protocol
SRB	Signalling Radio Bearer.
TCP	Transmission Control Protocol
UDP	User Datagram Protocol
UL	Uplink.

3.2 Terms

Bearer	Common term used to refer to RAB, RB, and/or SRB, when there is no need to distinguish between these terms.
Radio Access Bearer	Bearer terminating in CN.
Radio Bearer	User plane bearer on RAN level
Signalling Radio Bearer	RAN level bearer for RRC and NAS signalling. User plane signalling bearer (e.g., the bearer for SIP signalling) is not SRB, but RB.

NOTE: In [1] also the RAN level bearers are called as RABs. In order to maintain consistency with [1], the term RAB is used instead of RB also in this document in similar contexts as in [1].

4 QoS Architecture and RAB attributes

From a user point-of-view services are considered end-to-end, this means from a Terminal Equipment (TE) to another TE. An End-to-End Service may have a certain Quality of Service (QoS) which is provided for the user through the different networks. In UMTS, it is the UMTS Bearer Service that provides the requested QoS through the use of different QoS classes as defined in [2].

The UMTS Bearer Service consists of two parts, the Radio Access Bearer (RAB) Service and the Core Network Bearer Service. The Radio Access Bearer Service is realised by a Radio Bearer (RB) Service and an Iu-Bearer Service. The relationship between the services is illustrated in figure 4.1.

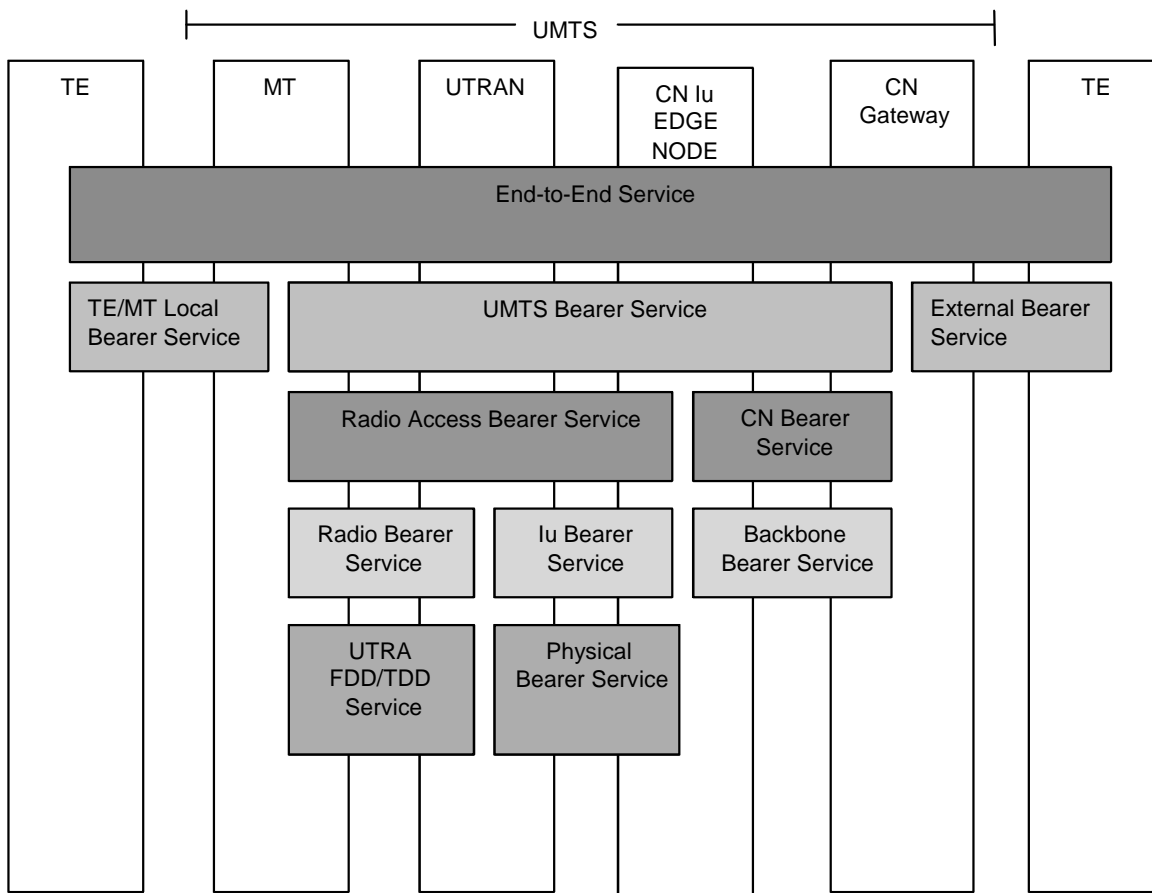


Figure 4.1: UMTS QoS Architecture

The Radio Access Bearer (RAB) Service is characterised by a number of attributes such as Traffic class, Maximum bit rate, Guaranteed bit rate, SDU error ratio, Residual BER, Transfer Delay etc. As a first approach the four following attributes have been considered to come up with the parameter settings in clause 7 for FDD mode and 8 for TDD mode:

- Traffic class;
- SSD;
- Maximum bit rate;
- Residual BER.

The Traffic classes are explained in table 4.1. The Maximum bit rate has been considered at RLC layer and Physical Layer for the acknowledged and unacknowledged modes respectively. The Residual BER is understood as BER at RLC layer and Transport BLER for the acknowledged and unacknowledged modes respectively.

Table 4.1: Traffic classes

Traffic class	Conversational class conversational RT	Streaming class streaming RT	Interactive class Interactive best effort	Background Background best effort
Fundamental characteristics	<ul style="list-style-type: none"> - Preserve time relation (variation) between information entities of the stream Conversational pattern (stringent and low delay) 	<ul style="list-style-type: none"> - Preserve time relation (variation) between information entities of the stream (i.e. some but constant delay) 	<ul style="list-style-type: none"> Request response pattern Preserve payload content 	<ul style="list-style-type: none"> Destination is not expecting the data within a certain time Preserve payload content
Example of the application	<ul style="list-style-type: none"> - speech, video, ... 	<ul style="list-style-type: none"> - facsimile (NT) - streaming audio and video 	<ul style="list-style-type: none"> - Web browsing 	<ul style="list-style-type: none"> - background download of emails

5 List of RABs and SRBs

The following table provides examples of Radio Access Bearers (RABs) which can be realised by Radio Bearers (RBs) as defined in clauses 7 and 8. The data rate given for each RAB is the maximum data rate that can be supported by that RAB.

The mapping between Radio Access Bearer and Radio Bearer is internal to UTRAN Radio Resource Management and not standardised. Based on certain Radio Access Bearer attributes, resource utilisation or radio conditions, different Radio Bearers can fulfill the Radio Access Bearer requirements.

Table 5.1: Examples of Radio Access Bearers (RABs).

#	Traffic class [2]	SSD	Max. rate, kbps	CS/PS
1	Conversational	Speech	UL:12.2 DL:12.2	CS
2	Conversational	Speech	UL:10.2 DL:10.2	CS
3	Conversational	Speech	UL:7.95 DL:7.95	CS
4	Conversational	Speech	UL:7.4 DL:7.4	CS
5	Conversational	Speech	UL:6.7 DL:6.7	CS
6	Conversational	Speech	UL:5.9 DL:5.9	CS
7	Conversational	Speech	UL:5.15 DL:5.15	CS
8	Conversational	Speech	UL:4.75 DL:4.75	CS
9	Conversational	Unknown	UL:28.8 DL:28.8	CS
10	Conversational	Unknown	UL:64 DL:64	CS
11	Conversational	Unknown	UL:32 DL:32	CS
12	Conversational	Unknown	UL:8 DL:8	PS
13	Conversational	Unknown	UL:16 DL:16	PS
14	Streaming	Unknown	UL:14.4 DL:14.4	CS
15	Streaming	Unknown	UL:28.8 DL:28.8	CS
16	Streaming	Unknown	UL:57.6 DL:57.6	CS
17	Streaming	Unknown	UL:0 DL:64	CS
18	Streaming	Unknown	UL:16 DL:64	PS
19	Streaming	Unknown	UL:64 DL:0	CS
20	Streaming	Unknown	UL:8 DL:16	PS
21	Streaming	Unknown	UL:8 DL:32	PS
22	Streaming	Unknown	UL:16 DL:64	PS
23	Streaming	Unknown	UL:32 DL:256	PS
24	Void			
25	Streaming	Unknown	UL:16 DL:128	PS
26	Void			
27	Void			
28	Interactive or Background	N/A	UL:32 DL:8	PS
29	Interactive or Background	N/A	UL:8 DL:8	PS
30	Interactive or Background	N/A	UL:16 DL:16	PS
31	Interactive or Background	N/A	UL:32 DL:32	PS
32	Interactive or Background	N/A	UL:64 DL:8	PS
33	Interactive or Background	N/A	UL:32 DL:64	PS
34	Interactive or Background	N/A	UL:64 DL:64	PS
35	Interactive or Background	N/A	UL:64 DL:128	PS
36	Interactive or Background	N/A	UL:128 DL:128	PS
37	Interactive or Background	N/A	UL:64 DL:384	PS
38	Interactive or Background	N/A	UL:128 DL:384	PS
39	Interactive or Background	N/A	UL:384 DL:384	PS
40	Interactive or Background	N/A	UL:64 DL:2048	PS
41	Interactive or Background	N/A	UL:128 DL:2048	PS
42	Interactive or Background	N/A	UL:384 DL:2048	PS
43	Interactive or Background	N/A	UL:64 DL:256	PS
44	Interactive or Background	N/A	UL:0 DL:32	PS
45	Interactive or Background	N/A	UL:32 DL:0	PS
46	Interactive or Background	N/A	UL:0 DL:0	PS
47	Interactive or Background	N/A	UL:64 DL:144	PS
48	Interactive or Background	N/A	UL:144 DL:144	PS
49	Interactive or Background	N/A	UL:128 DL:32	PS
50	Streaming	Unknown	UL:16 DL:16	PS
51	Streaming	Unknown	UL:16 DL:32	PS
52	Interactive or Background	N/A	UL:16 DL:32	PS
53	Interactive or Background	N/A	UL:16 DL:64	PS
54	Interactive or Background	N/A	UL:16 DL:128	PS
55	Streaming	Unknown	UL:128 DL:16	PS
56	Conversational	Speech	UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6)	CS

Table 5.2 provides examples of Signalling Radio Bearers (SRBs) which can use configurations as defined in clauses 7 and 8.

Table 5.2: Signalling Radio Bearers (SRBs)

#	Maximum rate, kbps	Logical channel	PhyCh onto which SRBs are mapped
1	UL:1.7 DL:1.7	DCCH	DPCH
2	UL:3.4 DL:3.4	DCCH	DPCH
3	UL:13.6 DL:13.6	DCCH	DPCH
4	DL:27.2 (alt. 40.8)	DCCH	SCCPCH
5	UL:16.6	CCCH	PRACH
6	DL:30.4 (alt. 45.6)	CCCH	SCCPCH
7	DL:33.2 (alt. 49.8)	BCCH:	SCCPCH
8	DL:24 (alt. 6.4)	PCCH	SCCPCH
9	UL:16.8 (TDD)	SHCCH	PRACH
10	UL:16.8 (TDD)	SHCCH	PRACH or PUSCH
11	DL:16 (TDD)	SHCCH	SCCPCH
12	DL:16 (TDD)	SHCCH	SCCPCH or PUSCH
13	DL: 0.15	DCCH	DPCH

6 Combinations of RABs

The present document contains examples of Radio configuration for following combinations of RABs.

NOTE: It is understood that for speech service the AMR mode may be operated asymmetrically for the uplink and downlink.

List of RAB combinations:

Combinations on DPCH

- 1) Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH.
- 2) Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 3) Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH.
- 4) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 5) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 6) Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 7) Conversational / speech / UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 8) Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 9) Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 10) Conversational / speech / UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 11) Conversational / speech / UL:6.7 DL:6.7 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

- 12) Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 13) Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB
+ UL:1.7 DL:1.7 kbps SRBs for DCCH.
- 14) Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB
+ UL:1.7 DL:1.7 kbps SRBs for DCCH.
- 15) Conversational / unknown / UL:28.8 DL:28.8 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 16) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 17) Conversational / unknown / UL:32 DL:32 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 18) Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 19) Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 20) Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 21) Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 22) Streaming / unknown / UL:64 DL:0 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 23) Interactive or background / UL:32 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 24) Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 25) Interactive or background / UL:16 DL:16 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 26) Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 27) Interactive or background / UL:32 DL:32 kbps / PS RAB (20 ms TTI)
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 28) Interactive or background / UL:64 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 29) Interactive or background / UL:32 DL: 64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 30) Interactive or background / UL:64 DL: 64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 31) Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 32) Interactive or background / UL:128 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 33) Interactive or background / UL:64 DL:144 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.

- 34) Interactive or background / UL:144 DL:144 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 35) Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 36) Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 37) Interactive or background / UL:128 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 38) Interactive or background / UL:384 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 39) Interactive or background / UL:64 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 40) Interactive or background / UL:128 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 41) Interactive or background / UL:384 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 42) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 43) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:0 DL:0 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH (FDD)
- 44) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH (FDD)
- 45) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH (FDD)
- 45a) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:32 kbps / PS RAB (20ms TTI)
+ UL:3.4 DL:3.4 kbps SRBs for DCCH (FDD)
- 46) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH (FDD)
- 47) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:0 DL:0 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 48) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 49) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:16 DL:16 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 50) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:32 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)

- 51) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 52) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 53) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:32 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 54) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.
- 55) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 56) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 57) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 58) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:64 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 59) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or background / UL:128 DL:2048 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 60) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 61) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 62) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 63) Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 64) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 65) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 66) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)

- 67) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or Background / UL:16 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 68) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 69) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or background / UL:128 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 70) Interactive or /background / UL:64 kbps DL:128 kbps / PS RAB
+ Streaming / unknown / UL:0 DL:64 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 71) Interactive or background / UL:8 DL:8 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 72) Interactive or background / UL:64 DL:64 kbps / PS RAB
+ Interactive or background / UL:64 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 73) Streaming / unknown / UL:16 DL:64 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH. (FDD)
- 74) Streaming / unknown / UL:16 DL:128 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH.
- 75) Conversational / unknown / UL:8 DL:8 kbps / PS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB +
+ UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:8 DL:8 kbps / PS RAB – TF0 contains zero Transport Blocks

- 76) Conversational / unknown / UL:8 DL:8 kbps / PS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:8 DL:8 kbps / PS RAB – TF0 contains one Transport Block of zero size

- 77) Conversational / unknown / UL:16 DL:16 kbps / PS RAB +
Interactive or Background / UL:8 DL:8 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:16 DL:16 kbps / PS RAB – TF0 contains zero Transport Blocks

- 78) Conversational / unknown / UL:16 DL:16 kbps / PS RAB +
Interactive or Background / UL:8 DL:8 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:16 DL:16 kbps / PS RAB – TF0 contains one Transport Block of zero size

- 79) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Interactive or Background / UL:0 DL:0 kbps / PS RAB
+ Interactive or Background / UL:0 DL:0 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 80) Conversational / unknown / UL:64 DL:64 kbps / CS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH

- 81) Streaming / unknown / UL:8 DL:16 kbps / PS RAB
+ Interactive or Background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 82) Streaming / unknown / UL:8 DL:32 kbps / PS RAB +
Interactive or Background / UL:8 DL:8 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH
- 83) Streaming / unknown / UL:32 DL:256 kbps / PS RAB +
Interactive or Background / UL:8 DL:8 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH
- 84) Interactive or background / UL:16 DL:16 kbps / PS RAB +
Interactive or Background / UL:16 DL:16 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH
- 85) Interactive or background / UL:64 DL:8 kbps / PS RAB +
Interactive or Background / UL:64 DL:8 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH
- 86) Interactive or Background / UL:64 DL:128 kbps / PS RAB
+ Interactive or Background / UL:64 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 87) Interactive or Background / UL:64 DL:384 kbps / PS RAB
+ Interactive or Background / UL:64 DL:384 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 88) Interactive or background / UL:128 DL:128 kbps / PS RAB +
Interactive or Background / UL:128 DL:128 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH
- 89) Interactive or background / UL:128 DL:32 kbps / PS RAB +
Interactive or Background / UL:128 DL:32 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH
- 90) Streaming / unknown / UL: 16 DL:16 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 91) Streaming / unknown / UL: 16 DL:32 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 92) Interactive or background / UL: 16 DL:32 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 93) Interactive or background / UL: 16 DL:64 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 94) Interactive or background / UL: 16 DL:128 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 95) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Streaming / unknown / UL: 16 DL:128 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
- 96) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ Streaming / unknown / UL: 128 DL:16 kbps / PS RAB
+ Interactive or background / UL:8 DL:8 kbps / PS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH

- 97) Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH

Combinations on SCCPCH

- 1) Stand-alone 24 kbps SRB for PCCH.
- 2) Interactive or background / DL:32 kbps / PS RAB
+ SRB for CCCH
+ SRBs for DCCH
+ SRB for BCCH.
- 3) Interactive or background / DL:32 kbps / PS RAB
+ SRB for PCCH
+ SRB for CCCH
+ SRBs for DCCH
+ SRB for BCCH.
- 4) 16 kbps RB for CTCH (FDD)
+ SRB for CCCH
+ SRB for BCCH
- 5) RB for CTCH (FDD)
+ Interactive or background / DL: 32 kbps / PS RAB
+ SRB for PCCH
+ SRB for CCCH
+ SRBs for DCCH
+ SRB for BCCH
- 6) Interactive or background / DL:16 kbps / PS RAB
+ SRB for CCCH
+ SRBs for DCCH
+ SRB for BCCH.
- 7) 8 kbps RB for CTCH (FDD)
+ SRB for CCCH
+ SRB for BCCH

Combinations on PRACH

- 1) Interactive or background / UL:32 kbps / PS RAB
+ SRB for CCCH
+ SRBs for DCCH.
- 2) Interactive or background / UL:32 kbps / PS RAB
+ Interactive or background / UL:32 kbps / PS RAB
+ SRBs for CCCH
+ SRB for DCCH.

Combinations on PDSCH, SCCPCH, PUSCH and PRACH (TDD)

- 1) Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH
+ UL:16.8 DL:16 kbps for SHCCH.
- 2) Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH
+ UL:16.8 DL:16 kbps for SHCCH.
- 3) Interactive or background / UL:64 DL:2048 kbps / PS RAB
+ UL:3.4 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH
+ UL:16.8 DL:16 kbps for SHCCH.

Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH (TDD)

- 1) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
+ Interactive or background / UL:64 DL:256 kbps / PS RAB
+ UL:16.8 kbps SRBs for CCCH and SHCCH
+ DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH
- 2) Conversationnal / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
+ Interactive or background / UL:64 DL:384 kbps / PS RAB
+ UL:16.8 kbps SRBs for CCCH and SHCCH
+ DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH
- 3) Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
+ UL:3.4 DL:3.4 kbps SRBs for DCCH
+ Interactive or background / UL:64 DL:2048 kbps / PS RAB
+ UL:16.8 kbps SRBs for CCCH and SHCCH
+ DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

7 Examples of Radio Bearers and Signalling Radio Bearers for FDD

7.1 Combinations on DPCH

7.1.1 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32kbps with support of DL SF = 512.

This is supported in Release '99.

7.1.2 Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.3 Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH

See subclause 6.10.2.4.1.3 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.4 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.4 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.5 Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.4a of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.6 Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.5 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.7 Conversational / speech / UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.5a of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.8 Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.6 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.9 Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.7 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.10 Conversational / speech / UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) kbps / CS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.7a of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.11 Conversational / speech / UL:6.7 DL:6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.8 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.12 Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.9 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.13 Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.2.4.1.10 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.14 Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.2.4.1.11 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.15 Conversational / unknown / UL:28.8/DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.12 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.16 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.13 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.17 Conversational / unknown / UL:32 DL:32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.14 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.18 Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.15 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps with support of turbo encoding and 'Maximum sum of number of bits of all transport blocks being transmitted at an arbitrary time instant' = 1280, DL: 32 kbps with support of turbo decoding and 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 1280.

This is supported in Release '99.

7.1.19 Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.16 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.20 Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.17 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.21 Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.18 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 64 kbps plus support for 'Maximum total number of transport blocks received within TTIs that end at the same time' = 16.

This is supported in Release '99.

7.1.22 Streaming / unknown / UL:64 DL:0 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.19 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 32 kbps.

This is supported in Release '99.

7.1.23 Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.23 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps with support of turbo decoding. For the alternative UL configuration, the minimum UE class supporting this combination is UL: 32 kbps.

This is supported in Release '99.

7.1.24 Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.23a of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.25 Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.23b of [1]

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.26 Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.23c of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.27 Interactive or background / UL:32 DL:32 kbps / PS RAB (20 ms TTI)+ UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.23d of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.28 Interactive or background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.24 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32kbps plus support for turbo decoding.

This is supported in Release '99.

7.1.29 Interactive or background / UL:32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.25 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps. The minimum UE class to support the alternative UL configuration (10ms TTI) is UL: 32kbps.

This is supported in Release '99.

7.1.30 Interactive or background / UL:64 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.26 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.31 Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.27 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.32 Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.28 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 128kbps.

This is supported in Release '99.

7.1.33 Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.29 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.34 Interactive or background / UL:144 DL:144 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.30 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 128kbps.

This is supported in Release '99.

7.1.35 Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

7.1.35.1 On DPCH

See subclause 6.10.2.4.1.31 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps plus support for 'Maximum number of physical channel bits received in any 10ms interval' = 9600. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 384kbps.

This is supported in Release '99.

7.1.35.2 On PDSCH and DPCH

See subclause 6.10.2.4.2.1 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps plus support for PDSCH plus support for 'Maximum number of physical channel bits received in any 10ms interval' = 9600. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 384kbps plus support for PDSCH.

This is supported in Release '99.

7.1.36 Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

7.1.36.1 On DPCH

See subclause 6.10.2.4.1.32 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.36.2 On PDSCH and DPCH

See subclause 6.10.2.4.2.2 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps plus support for PDSCH. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.37 Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.33 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 384kbps. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.38 Interactive or background / UL:384 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.34 of [1].

The minimum UE classes supporting this combination are UL: 384kbps, DL: 384kbps. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.39 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.39.1 On DPCH

See subclause 6.10.2.4.1.35 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 2048kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.39.2 On PDSCH and DPCH

See subclause 6.10.2.4.2.3 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 2048kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.40 Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.36 of [1].

The minimum UE classes supporting this combination are UL: 128 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 2048 kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.41 Interactive or background / UL:384 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.37 of [1].

The minimum UE classes supporting this combination are UL: 384 kbps, DL: 2048 kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.42 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps plus support for turbo decoding.

This is supported in Release '99.

7.1.43 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38a of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32kbps.

This is supported in Release '99.

7.1.44 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38b of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32 kbps plus support for turbo decoding.

This is supported in Release '99.

7.1.45 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38c of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.45a Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB (20ms TTI)+ UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.45a.1 Uplink

7.1.45a.1.1 Transport channel parameters

7.1.45a.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1]

7.1.45a.1.1.2 Transport channel parameters for Interactive or background / UL:32 kbps / PS RAB

See subclause 6.10.2.4.1.23d.1.1.1 of [1]

7.1.45a.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.45a.1.1.4 TFCS

TFCS size	18
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 32 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF1,TF2,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF1,TF2,TF1)

7.1.45a.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1.0

7.1.45a.2 Downlink

7.1.45a.2.1 Transport channel parameters

7.1.45a.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1]

7.1.45a.2.1.2 Transport channel parameters for Interactive or background / DL:32 kbps / PS RAB

See subclause 6.10.2.4.1.23d.2.1.1 of [1]

7.1.45a.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.45a.2.1.4 TFCS

TFCS size	18
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 32 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF1,TF2,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF1,TF2,TF1)

7.1.45a.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
Number of data bits/frame		2100	

7.1.46 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38d of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.47 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95
5.9 4.75) kbps / CS RAB + Interactive or background / UL:0 DL:0
kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38e of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32kbps.

This is supported in Release '99.

7.1.48 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95
5.9 4.75) kbps / CS RAB + Interactive or background / UL:8 DL:8
kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38f of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32 kbps plus support of turbo decoding.

This is supported in Release '99.

7.1.49 Conversational / speech / UL: (12.2 7.95 5.9 4.75) kbps DL: (12.2
7.95 5.9 4.75) / CS RAB + Interactive or background / UL:16 DL:16
kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38g of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.50 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95
5.9 4.75) kbps / CS RAB + Interactive or background / UL:32 DL:32
kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38h of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.51 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95
5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:64
kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38i of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.52 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38j of [1].

The minimum UE classes supporting this combination are UL: 64kbp, DL: 128kbps.

This is supported in Release '99.

7.1.53 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.39 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.54 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.40 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.55 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.41 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.56 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.56.1 On DPCH

See subclause 6.10.2.4.1.42 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 384 kbps.

This is supported in Release '99.

7.1.56.2 On PDSCH and DPCH

See subclause 6.10.2.4.2.4 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 384 kbps plus support of PDSCH.

This is supported in Release '99.

7.1.57 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.57.1 On DPCH

See subclause 6.10.2.4.1.43 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 384. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.57.2 On PDSCH and DPCH

See subclause 6.10.2.4.2.5 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 384 kbps plus support for PDSCH. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.58 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.2.6 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 2048 kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.59 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.44 of [1].

The minimum UE classes supporting this combination are UL: 384 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 2048 kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.60 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.45 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.61 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4
kbps SRBs for DCCH

See subclause 6.10.2.4.1.46 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL 128kbps.

This is supported in Release '99.

7.1.62 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.49 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.63 Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9
4.75) kbps / CS RAB + Conversational / unknown / UL:64 DL:64
kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.49a of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.64 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.50 of [1].

The minimum UE classes supporting this combination are UL: 128kbps, DL: 128kbps. The minimum UE class to support the alternative UL combination (40ms TTI) is UL: 384kbps.

This is supported in Release '99.

7.1.65 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.51 of [1].

The minimum UE classes supporting this combination are UL: 128kbps, DL: 128kbps. The minimum UE class to support the alternative UL combination (40ms TTI) is UL: 384kbps.

This is supported in Release '99.

7.1.66 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.51a of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.67 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.51b of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.68 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.52 of [1].

The minimum UE classes supporting this combination are UL: 128kbps, DL: 384kbps. The minimum UE class to support the alternative UL combination (40ms TTI) is UL: 384kbps.

This is supported in Release '99.

7.1.69 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.53 of [1].

The minimum UE classes supporting this combination are UL: 384kbps, DL: 384kbps.

This is supported in Release '99.

7.1.70 Interactive or background / UL:64 DL:128 kbps / PS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.54 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps.

This is supported in Release '99.

7.1.71 Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.56 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo encoding, DL: 32kbps plus support for turbo decoding plus support for 5 AM entities.

This is supported in Release '99.

7.1.72 Interactive or background / UL:64 DL:64 kbps / PS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.57 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps plus support for 5 AM entities.

This is supported in Release '99.

7.1.73 Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.58 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps plus support for 5 AM entities.

This is supported in Release '99.

7.1.73a Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH – Alternative

This configuration optimises the flexibility of the Transport Format Selection by adding an omitted Transport Format, to the transport channel parameters given in the reference subclause 6.10.2.4.1.58 of [1], for the downlink, transport channel Streaming / unknown / DL:64 kbps PS RAB.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps plus support for 5 AM entities.

This is supported in Release '99.

7.1.73a.1 Uplink

See subclause 6.10.2.4.1.58.1 of [1]

7.1.73a.2 Downlink

7.1.73a.2.1 Transport channel parameters

7.1.73a.2.1.1 Transport channel parameters for Streaming / unknown / DL:64 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	64000	
	AM PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	3x656
		TF4, bits	4x656
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8076	
RM attribute	125-165		

7.1.73a.2.1.2 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See clause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.73a.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See clause 6.10.2.4.1.2.2.1.1 of [1]

7.1.73a.2.1.4 TFCS

TFCS size	20
TFCS	(64 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF4,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF4,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF4,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1), (TF4,TF1,TF1),

7.1.73a.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible
	Spreading factor	32
DPCCH	Number of TFCl bits/slot	8
	Number of TPC bits/slot	4
	Number of Pilot bits/slot	8
DPDCH	Number of data bits/slot	140
	Number of data bits/frame	2100

7.1.74 Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.74.1 Uplink

7.1.74.1.1 Transport channel parameters

7.1.74.1.1.1 Transport channel parameters for Streaming / unknown / UL:16 kbps / PS RAB

See subclause 6.10.2.4.1.58.1.1.1 of [1]

7.1.74.1.1.2 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.1 of [1].

7.1.74.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.74.1.1.4 TFCS

See subclause 6.10.2.4.1.58.1.1.4 of [1].

7.1.74.1.2 Physical channel parameters

See subclause 6.10.2.4.1.58.1.2 of [1].

7.1.74.2 Downlink

7.1.74.2.1 Transport channel parameters

7.1.74.2.1.1 Transport channel parameters for Streaming / unknown / DL:128 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	128000	
	AM PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	3x656
		TF4, bits	4x656
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8076	
RM attribute	125-165		

7.1.74.2.1.2 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.1 of [1].

7.1.74.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.74.2.1.4 TFCS

TFCS size	20
TFCS	(128 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF4,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF4,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF4,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1), (TF4,TF1,TF1),

7.1.74.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible	
	Spreading factor	16	
	DPCCH	Number of TFCI bits/slot	8
		Number of Pilot bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
Number of data bits/frame		4320	

7.1.75 Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:8 kbps / PS RAB – TF0 contains zero Transport Blocks .

NOTE: Conversational / unknown / DL:8 kbps / PS RAB – TF0 contains zero Transport Blocks.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.75.1 Uplink

7.1.75.1.1 Transport channel parameters

7.1.75.1.1.1 Transport channel parameters for Conversational / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	8000	
	UMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	328	
	TFS	TF0, bits	0x328
		TF1, bits	1x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	1044	
	Uplink: Max number of bits/radio frame before rate matching	261	
RM attribute	135-175		

7.1.75.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.75.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.75.1.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

7.1.75.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.75.2 Downlink

7.1.75.2.1 Transport channel parameters

7.1.75.2.1.1 Transport channel parameters for Conversational / unknown / DL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	8000	
	AMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	328	
	TFS	TF0, bits	0x328
		TF1, bits	1x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	1044	
	RM attribute	135-175	

7.1.75.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1].

7.1.75.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.75.2.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

7.1.75.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.76 Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:8 kbps / PS RAB – TF0 contains one Transport Block of zero size.

NOTE: Conversational / unknown / DL:8 kbps / PS RAB – TF0 contains one Transport Block of zero size.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.76.1 Uplink

7.1.76.1.1 Transport channel parameters

7.1.76.1.1.1 Transport channel parameters for Conversational / unknown / UL:8 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	8000	
	UMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	0, 328	
	TFS	TF0, bits	1x0
		TF1, bits	1x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	1044	
	Uplink: Max number of bits/radio frame before rate matching	261	
RM attribute	135-175		

7.1.76.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.76.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.76.1.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

7.1.76.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.76.2 Downlink

7.1.76.2.1 Transport channel parameters

7.1.76.2.1.1 Transport channel parameters for Conversational / unknown / DL:8 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	8000	
	AMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	0, 328	
	TFS	TF0, bits	1x0
		TF1, bits	1x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	1044	
RM attribute	135-175		

7.1.76.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1].

7.1.76.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.76.2.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

7.1.76.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.77 Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:16 kbps / PS RAB – TF0 contains zero Transport Blocks.

NOTE: Conversational / unknown / DL:16 kbps / PS RAB – TF0 contains zero Transport Blocks.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.77.1 Uplink

7.1.77.1.1 Transport channel parameters

7.1.77.1.1.1 Transport channel parameters for Conversational / unknown / UL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	UMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	328	
	TFS	TF0, bits	0x328
		TF1, bits	1x328
		TF2, bits	2x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2076	
	Uplink: Max number of bits/radio frame before rate matching	519	
RM attribute	135-175		

7.1.77.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.77.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.77.1.1.4 TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.77.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.77.2 Downlink

7.1.77.2.1 Transport channel parameters

7.1.77.2.1.1 Transport channel parameters for Conversational / unknown / DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	AMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	328	
	TFS	TF0, bits	0x328
		TF1, bits	1x328
		TF2, bits	2x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2076	
	RM attribute	135-175	

7.1.77.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1. 38b.2.1.2 of [1]

7.1.77.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.77.2.1.4 TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.77.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.78 Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:16 kbps / PS RAB – TF0 contains one Transport Block of zero size.

NOTE: Conversational / unknown / DL:16 kbps / PS RAB – TF0 contains one Transport Block of zero size.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.78.1 Uplink

7.1.78.1.1 Transport channel parameters

7.1.78.1.1.1 Transport channel parameters for Conversational / unknown / UL:16 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	UMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	0, 328	
	TFS	TF0, bits	1x0
		TF1, bits	1x328
		TF2, bits	2x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2076	
	Uplink: Max number of bits/radio frame before rate matching	519	
	RM attribute	135-175	

7.1.78.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.78.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.78.1.1.4 TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.78.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.78.2 Downlink

7.1.78.2.1 Transport channel parameters

7.1.78.2.1.1 Transport channel parameters for Conversational / unknown / DL:16 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	AMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	0, 328	
	TFS	TF0, bits	1x0
		TF1, bits	1x328
		TF2, bits	2x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2076	
	RM attribute	135-175	

7.1.78.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.78.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.78.2.1.4 TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.78.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

**7.1.79 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or Background / UL:0 DL:0 kbps / PS RAB + Interactive
or Background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps
SRBs for DCCH**

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.79.1 Uplink

7.1.79.1.1 Transport channel parameters

7.1.79.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.79.1.1.2 Transport channel parameters for Interactive or Background / UL:0 + UL:0 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	0	0	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
	TTI, ms	20		
	Coding type	TC		
	CRC, bit	16		
	Max number of bits/TTI after channel coding	0		
	Uplink: Max number of bits/radio frame before rate matching	0		
	RM attribute	130-170		

7.1.79.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.79.1.1.4 TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0+0kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1)

7.1.79.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	64
	Max number of DPDCH data bits/radio frame	600
	Puncturing Limit	0.84

7.1.79.2 Downlink

7.1.79.2.1 Transport channel parameters

7.1.79.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.79.2.1.2 Transport channel parameters for Interactive or Background / DL:0 + DL:0 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	0	0	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
	TTI, ms	20		
	Coding type	TC		
	CRC, bit	16		
	Max number of bits/TTI after channel coding	0		
	RM attribute	130-170		

7.1.79.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.79.2.1.4 TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0+0kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1)

7.1.79.2.2 Physical channel parameters

DPCH Downlink	DTX position		Fixed
	Spreading factor		128
	DPCCH	Number of TFCI bits/slot	0
		Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot	34
Number of data bits/frame		510	

**7.1.80 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Interactive or Background / UL:8 DL:8 kbps / PS RAB + Interactive
or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps
SRBs for DCCH**

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.80.1 Uplink

7.1.80.1.1 Transport channel parameters

7.1.80.1.1.1 Transport channel parameters for Conversational / unknown / UL:64 kbps / CS RAB

See subclause 6.10.2.4.1.13.1.1.1 of [1].

7.1.80.1.1.2 Transport channel parameters for Interactive or Background / UL:8 + UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.1.1.1 of [1]

7.1.80.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.80.1.1.4 TFCS

TFCS size	8
TFCS	(64 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.80.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.72

7.1.80.2 Downlink

7.1.80.2.1 Transport channel parameters

7.1.80.2.1.1 Transport channel parameters for Conversational / unknown / DL:64 kbps / CS RAB

See subclause 6.10.2.4.1.13.2.1.1 of [1].

7.1.80.2.1.2 Transport channel parameters for Interactive or Background / DL:8 + DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.2.1.1 of [1].

7.1.80.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.80.2.1.4 TFCS

TFCS size	8
TFCS	(64 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.80.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		32
DPCCH	Number of TFCI bits/slot		8
	Number of TPC bits/slot		4
	Number of Pilot bits/slot		8
DPDCH	Number of data bits/slot		140
	Number of data bits/frame		2100

7.1.81 Streaming / unknown / UL:8 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.81.1 Uplink

7.1.81.1.1 Transport channel parameters

7.1.81.1.1.1 Transport channel parameters for Streaming / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	320	
	Max data rate, bps	8000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	336	
	TFS	TF0, bits	0x336
		TF1, bits	1x336
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	1068	
	Uplink: Max number of bits/radio frame before rate matching	267	
	RM attribute	135-175	

7.1.81.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.81.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.81.1.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.81.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.81.2 Downlink

7.1.81.2.1 Transport channel parameters

7.1.81.2.1.1 Transport channel parameters for Streaming / unknown / DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	16000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2028	
	RM attribute	125-165	

7.1.81.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.81.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.81.2.1.4 TFCS

TFCS size	8
TFCS	(16 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.81.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.82 Streaming / unknown / UL:8 DL:32 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.82.1 Uplink

7.1.82.1.1 Transport channel parameters

7.1.82.1.1.1 Transport channel parameters for Streaming / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	320	
	Max data rate, bps	8000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	336	
	TFS	TF0, bits	0x336
		TF1, bits	1x336
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	1068	
	Uplink: Max number of bits/radio frame before rate matching	267	
	RM attribute	135-175	

7.1.82.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.82.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.82.1.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.82.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.82.2 Downlink

7.1.82.2.1 Transport channel parameters

7.1.82.2.1.1 Transport channel parameters for Streaming / unknown / DL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	32000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	4044	
RM attribute	125-165		

7.1.82.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1. 38b.2.1.2 of [1]

7.1.82.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.82.2.1.4 TFCS

TFCS size	12
TFCS	(32 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.82.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

7.1.83 Streaming / unknown / UL:32 DL:256 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps.

This is supported in Release '99.

7.1.83.1 Uplink

7.1.83.1.1 Transport channel parameters

7.1.83.1.1.1 Transport channel parameters for Streaming / unknown / UL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	320	
	Max data rate, bps	32000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	336	
	TFS	TF0, bits	0x336
		TF1, bits	1x336
		TF2, bits	2x336
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2124	
	Uplink: Max number of bits/radio frame before rate matching	1062	
RM attribute	135-175		

7.1.83.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.83.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.83.1.1.4 TFCS

TFCS size	12
TFCS	(32 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1)

7.1.83.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1.0

7.1.83.2 Downlink

7.1.83.2.1 Transport channel parameters

7.1.83.2.1.1 Transport channel parameters for Streaming / unknown / DL:256 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	256000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	3x656
		TF4, bits	4x656
	TTI, ms	10	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8076	
RM attribute	125-165		

7.1.83.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1. 38b.2.1.2 of [1]

7.1.83.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.83.2.1.4 TFCS

TFCS size	20
TFCS	(256 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF4,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF4,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF4,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1), (TF4,TF1,TF1),

7.1.83.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		8
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	608
		Number of data bits/frame	9120

7.1.84 Interactive or background / UL:16 DL:16 kbps / PS RAB +
Interactive or Background / UL:16 DL:16 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.84.1 Uplink

7.1.84.1.1 Transport channel parameters

7.1.84.1.1.1 Transport channel parameters for Interactive or Background / UL:16 + UL:16 kbps /
PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	16000	16000	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
		TF1, bits	1x340	
		TF2, bits	2x340	
	TTI, ms	40		
	Coding type	TC		
	CRC, bit	16		
	Max number of bits/TTI after channel coding	2148		
	Uplink: Max number of bits/radio frame before rate matching	537		
RM attribute	135-175			

7.1.84.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.84.1.1.3 TFCS

TFCS size	6
TFCS	(16 kbps RAB + 16 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1)

7.1.84.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.84.2 Downlink

7.1.84.2.1 Transport channel parameters

7.1.84.2.1.1 Transport channel parameters for Interactive or background / DL:16 + DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	16000	16000	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
		TF1, bits	1x340	
		TF2, bits	2x340	
	TTI, ms	40		
	Coding type	TC		
	CRC, bit	16		
Max number of bits/TTI after channel coding	2148			
RM attribute	135-175			

7.1.84.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.84.2.1.3 TFCS

TFCS size	6
TFCS	(16 kbps RAB + 16 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1)

7.1.84.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		128
	DPCCH	Number of TFCI bits/slot	2
		Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot	32
Number of data bits/frame		480	

7.1.85 Interactive or background / UL:64 DL:8 kbps / PS RAB + Interactive or Background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.85.1 Uplink

See subclause 6.10.2.4.1.57.1 of [1]

7.1.85.2 Downlink

See subclause 6.10.2.4.1.56.2 of [1]

7.1.86 Interactive or Background / UL:64 DL:128 kbps / PS RAB + Interactive or Background / UL:64 DL:128 kbps / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.86.1 Uplink

See subclause 6.10.2.4.1.57.1 of [1]

7.1.86.2 Downlink

7.1.86.2.1 Transport channel parameters

7.1.86.2.1.1 Transport channel parameters for Interactive or background / DL:128 + DL:128 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	128000	128000	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
		TF1, bits	1x340	
		TF2, bits	2x340	
		TF3, bits	4x340	
		TF4, bits	8x340	
	TTI, ms	20		
	Coding type	TC		
	CRC, bit	16		
Max number of bits/TTI after channel coding	8556			
RM attribute	120-160			

7.1.86.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.86.2.1.3 TFCS

TFCS size	10
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF3,TF0), (TF4,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF3,TF1), (TF4,TF1)

7.1.86.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		16
DPCCH	Number of TFCI bits/slot		8
	Number of TPC bits/slot		8
	Number of Pilot bits/slot		16
DPDCH	Number of data bits/slot		288
	Number of data bits/frame		4320

7.1.87 Interactive or Background / UL:64 DL:384 kbps / PS RAB +
Interactive or Background / UL:64 DL:384 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps.

This is supported in Release '99.

7.1.87.1 Uplink

See subclause 6.10.2.4.1.57.1 of [1].

7.1.87.2 Downlink

7.1.87.2.1 Transport channel parameters

7.1.87.2.1.1 Transport channel parameters for Interactive or background / DL:384 + DL:384 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	384000	384000	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
		TF1, bits	1x340	
		TF2, bits	2x340	
		TF3, bits	4x340	
		TF4, bits	8x340	
		TF5, bits	12x340	
	TTI, ms	10		
	Coding type	TC		
	CRC, bit	16		
	Max number of bits/TTI after channel coding	12828		
RM attribute	110-150			

7.1.87.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.87.2.1.3 TFCS

TFCS size	12
TFCS	(384 kbps RAB + 384 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF5, TF0) (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1), (TF5, TF1)

7.1.87.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		8
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	608
		Number of data bits/frame	9120

7.1.88 Interactive or background / UL:128 DL:128 kbps / PS RAB + Interactive or Background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps, DL: 128kbps.

This is supported in Release '99.

7.1.88.1 Uplink

7.1.88.1.1 Transport channel parameters

7.1.88.1.1.1 Transport channel parameters for Interactive or Background / UL:128 + UL:128 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	128000	128000	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
		TF1, bits	1x340	
		TF2, bits	2x340	
		TF3, bits	4x340	
		TF4, bits	8x340	
	TTI, ms	20		
	Coding type	TC		
	CRC, bit	16		
	Max number of bits/TTI after channel coding	8556		
Uplink: Max number of bits/radio frame before rate matching	4278			
RM attribute	120-160			

7.1.88.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.88.1.1.3 TFCS

TFCS size	10
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

7.1.88.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	8
	Max number of DPDCH data bits/radio frame	4800
	Puncturing Limit	0.96

7.1.88.2 Downlink

7.1.88.2.1 Transport channel parameters

7.1.88.2.1.1 Transport channel parameters for Interactive or background / DL:128 + DL:128 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	128000	128000	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
		TF1, bits	1x340	
		TF2, bits	2x340	
		TF3, bits	4x340	
		TF4, bits	8x340	
	TTI, ms	20		
	Coding type	TC		
	CRC, bit	16		
Max number of bits/TTI after channel coding	8556			
RM attribute	120-160			

7.1.88.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.88.2.1.3 TFCS

TFCS size	10
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF3,TF0), (TF4,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF3,TF1), (TF4,TF1)

7.1.88.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible
	Spreading factor	16
DPCCH	Number of TFCI bits/slot	8
	Number of TPC bits/slot	8
	Number of Pilot bits/slot	16
DPDCH	Number of data bits/slot	288
	Number of data bits/frame	4320

7.1.89 Interactive or background / UL:128 DL:32 kbps / PS RAB +
Interactive or Background / UL:128 DL:32 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps, DL: 32kbps plus support for turbo decoding.

This is supported in Release '99.

7.1.89.1 Uplink

See subclause 7.1.88.1

7.1.89.2 Downlink

7.1.89.2.1 Transport channel parameters

7.1.89.2.1.1 Transport channel parameters for Interactive or background / DL:32 + DL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB	
RLC	Logical channel type	DTCH	DTCH	
	RLC mode	AM	AM	
	Payload sizes, bit	320	320	
	Max data rate, bps	32000	32000	
	AMD PDU header, bit	16	16	
MAC	MAC header, bit	4	4	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	DCH		
	TB sizes, bit	340		
	TFS	TF0, bits	0x340	
		TF1, bits	1x340	
		TF2, bits	2x340	
		TF3, bits	3x340	
		TF4, bits	4x340	
	TTI, ms	40		
	Coding type	TC		
	CRC, bit	16		
Max number of bits/TTI after channel coding	4284			
RM attribute	135-175			

7.1.89.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.89.2.1.3 TFCS

TFCS size	10
TFCS	(32 kbps RAB + 32 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0) (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

7.1.89.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.90 Streaming / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.90.1 Uplink

See subclause 6.10.2.4.1.58.1 of [1].

7.1.90.2 Downlink

See subclause 7.1.81.2.

7.1.91 Streaming / unknown / UL:16 DL:32 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.91.1 Uplink

See subclause 6.10.2.4.1.58.1 of [1].

7.1.91.2 Downlink

See subclause 7.1.82.2.

7.1.92 Interactive or background / UL:16 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.92.1 Uplink

See subclause 6.10.2.4.1.23b.1 of [1].

7.1.92.2 Downlink

See subclause 6.10.2.4.1.23c.2 of [1].

7.1.93 Interactive or background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.93.1 Uplink

See subclause 6.10.2.4.1.23b.1 of [1].

7.1.93.2 Downlink

See subclause 6.10.2.4.1.25.2 of [1].

7.1.94 Interactive or background / UL:16 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.94.1 Uplink

See subclause 6.10.2.4.1.23b.1 of [1].

7.1.94.2 Downlink

See subclause 6.10.2.4.1.27.2 of [1].

7.1.95 Conversational / speech / UL:12.2 DL:12.2 kbps + Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in release '99.

7.1.95.1 Uplink

7.1.95.1.1 Transport channel parameters

7.1.95.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.95.1.1.2 Transport channel parameters for Streaming / unknown / UL:16 kbps

See subclause 6.10.2.4.1.58.1.1.1 of [1].

7.1.95.1.1.3 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1].

7.1.95.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.95.1.1.5 TFCS

TFCS size	24
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 16 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1)

7.1.95.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1.0

7.1.95.2 Downlink

7.1.95.2.1 Transport channel parameters

7.1.95.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1]

7.1.95.2.1.2 Transport channel parameters for Streaming / unknown / DL:128 kbps / PS RAB

See subclause 7.1.74.2.1.1.

7.1.95.2.1.3 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.95.2.1.4 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.95.2.1.5 TFCS

TFCS size	48
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 128 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF2,TF1,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF1,TF3,TF1,TF1)

7.1.95.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		16
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
Number of data bits/frame		4320	

7.1.96 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:128 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128 kbps, DL: 64 kbps.

This is supported in release 99.

7.1.96.1 Uplink

7.1.96.1.1 Transport channel parameters

7.1.96.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1]

7.1.96.1.1.2 Transport channel parameters for Streaming / unknown / UL:128 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	128000	
	AM PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	4x656
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8076	
	Uplink: Max number of bits/radio frame before rate matching	4038	
RM attribute	125-165		

7.1.96.1.1.3 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1].

7.1.96.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.96.1.1.5 TFCS

TFCS size	48
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 128 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF2,TF1,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF1,TF3,TF1,TF1)

7.1.96.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	8
	Max number of DPDCH data bits/radio frame	4800
	Puncturing Limit	0.92

7.1.96.2 Downlink

7.1.96.2.1 Transport channel parameters

7.1.96.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1]

7.1.96.2.1.2 Transport channel parameters for Streaming / unknown / DL:16 kbps / PS RAB

See subclause 7.1.81.2.1.1

7.1.96.2.1.3 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1].

7.1.96.2.1.4 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.96.2.1.5 TFCS

TFCS size	24
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 16 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1)

7.1.96.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		64
DPCCH	Number of TFCl bits/slot		8
	Number of TPC bits/slot		4
	Number of Pilot bits/slot		8
DPDCH	Number of data bits/slot		60
	Number of data bits/frame		900

7.1.97 Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH

See subclause 6.10.2.4.1.62 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release '5.

7.2 Combinations on S-CCPCH

7.2.1 Stand-alone signalling RB for PCCH

See subclause 6.10.2.4.3.1 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.2.2 Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.2.4.3.2 of [1].

The minimum UE class supporting this combination is DL: 32 kbps plus support for turbo decoding and 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 1280.

This is supported in Release '99.

7.2.3 Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.2.4.3.2a of [1].

The minimum UE class supporting this combination is DL: 32 kbps plus support for 5 AM entities, support for turbo decoding and 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 1280.

This is supported in Release '99.

7.2.4 Interactive/Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.2.4.3.3 of [1].

The minimum UE class supporting this combination is DL: 32 kbps plus support for turbo decoding and 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 1280.

This is supported in Release '99.

7.2.5 16 kbps RB for CTCH + SRB for CCCH + SRB for BCCH

See subclause 6.10.2.4.3.4 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.2.6 RB for CTCH + Interactive/Background 32 kbps PS RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.2.6.1 Transport channel parameters

7.2.6.1.1 Transport channel parameters of RB for CTCH

Higher layer	RAB/signalling RB		N/A
	User of Radio Bearer		BMC
RLC	Logical channel type		CTCH
	RLC mode		UM
	Payload sizes, bit		152
	Max data rate, bps		15200
	UMD PDU header, bit		8
MAC	MAC header, bit		8
	MAC multiplexing		N/A
Layer 1	TrCH type		FACH
	TB sizes, bit		168
	TFS	TF0, bts	0x168
		TF1, bits	1x168
	TTI, ms		10
	Coding type		CC ½
	CRC, bit		16
	Max number of bits/TTI before rate matching		384
RM attribute		200-240	

7.2.6.1.2 Transport channel parameters of SRB for Interactive/Background 32 kbps PS RAB

See subclause 6.10.2.4.3.2.1.1 of [1].

7.2.6.1.3 Transport channel parameter of SRB for PCCH

See subclause 6.10.2.4.3.1.1.1 of [1].

7.2.6.1.4 Transport channel parameters of SRBs for CCCH, SRB for DCCH, and SRB for BCCH

See subclause 6.10.2.4.3.2.1.2 of [1].

7.2.6.1.5 TFCS

TFCS size	14
TFCS	(SRB for PCCH, SRBs for CCCH/DCCH/BCCH, 32kbps RAB, RB for CTCH) = (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF0, TF1, TF0, TF0), (TF1, TF1, TF0, TF0), (TF0, TF2, TF0, TF0), (TF1, TF2, TF0, TF0), (TF0, TF0, TF1, TF0), (TF0, TF1, TF1, TF0), (TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF1), (TF0, TF1, TF0, TF1), (TF1, TF1, TF0, TF1), (TF0, TF2, TF0, TF1), (TF0, TF0, TF1, TF1)

7.2.6.2 Physical channel parameters

SCCPCH	DTX position	Flexible
	Spreading factor	64
	Number of TFCI bits/slot	8
	Number of Pilot bits/slot	0
	Number of data bits/slot	72
	Number of data bits/frame	1080

7.2.7 Interactive/Background 16 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

7.2.7.1 Transport channel parameters

7.2.7.1.1 Transport channel parameters for Interactive/Background 16 kbps PS RAB

Higher layer	RAB/signalling RB	RAB	
	User of Radio Bearer	Interactive/ Background RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	24	
	MAC multiplexing	N/A	
Layer 1	TrCH type	FACH	
	TB sizes, bit	360	
	TFS	TF0, bits	0x360
		TF1, bits	1x360
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI before rate matching	1140	
RM attribute	110-150		

7.2.7.1.2 Transport channel parameters of SRBs for CCCH, SRB for DCCH, and SRB for BCCH

Higher layer	RAB/signalling RB	SRB#0	SRB#1	SRB#2	SRB#3	SRB#4	SRB#5	
	User of Radio Bearer	RRC	RRC	RRC	NAS_DT High prio	NAS_DT Low prio	RRC	
RLC	Logical channel type	CCCH	DCCH	DCCH	DCCH	DCCH	BCCH	
	RLC mode	UM	UM	AM	AM	AM	TM	
	Payload sizes, bit	152	136 or 120 (note)	128	128	128	166	
	Max data rate, bps	15200	13600 or 12000	12800	12800	12800	16600	
	AMD/UMD/TrD PDU header, bit	8	8	16	16	16	0	
MAC	MAC header, bit	8	24 or 40	24	24	24	2	
	MAC multiplexing	6 logical channel multiplexing						
Layer 1	TrCH type	FACH						
	TB sizes, bit	168						
	TFS	TF0, bits	0x168					
		TF1, bits	1x168					
		TF2, bits	2x168					
	TTI, ms	20						
	Coding type	CC 1/2						
	CRC, bit	16						
	Max number of bits/TTI before rate matching	752						
RM attribute	200-240							
NOTE: MAC header size and PLC payload size depend on use of U-RNTI or C-RNTI.								

7.2.7.1.3 TFCS

TFCS size	4
TFCS	(SRBs for CCCH/DCCH/BCCH, 16 kbps RAB) = (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1)

7.2.7.2 Physical channel parameters

SCCPCH	DTX position	Flexible
	Spreading factor	128
	Number of TFCI bits/slot	2
	Number of Pilot bits/slot	0
	Number of data bits/slot	38
	Number of data bits/frame	570

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.2.8 8 kbps RB for CTCH + SRB for CCCH + SRB for BCCH

7.2.8.1 Transport channel parameters

7.2.8.1.1 Transport channel parameters of 8 kbps RB for CTCH

Higher layer	RAB/signalling RB		N/A
	User of Radio Bearer		BMC
RLC	Logical channel type		CTCH
	RLC mode		UM
	Payload sizes, bit		152
	Max data rate, bps		7600
	UMD PDU header, bit		8
MAC	MAC header, bit		8
	MAC multiplexing		N/A
Layer 1	TrCH type		FACH
	TB sizes, bit		168
	TFS	TF0, bts	0x168
		TF1, bits	1x168
	TTI, ms		20
	Coding type		CC 1/3
	CRC, bit		16
	Max number of bits/TTI before rate matching		576
	RM attribute		200-240

7.2.8.1.2 Transport channel parameters of SRB for CCCH and SRB for BCCH

Higher layer	RAB/signalling RB	SRB#0	SRB#5	
	User of Radio Bearer	RRC	RRC	
RLC	Logical channel type	CCCH	BCCH	
	RLC mode	UM	TM	
	Payload sizes, bit	152	166	
	Max data rate, bps	7600	8300	
	AMD/UMD/TrD PDU header, bit	8	0	
MAC	MAC header, bit	8	2	
	MAC multiplexing	2 logical channel multiplexing		
Layer 1	TrCH type	FACH		
	TB sizes, bit	168		
	TFS	TF0, bits	0x168	
		TF1, bits	1x168	
	TTI, ms	20		
	Coding type	CC 1/3		
	CRC, bit	16		
	Max number of bits/TTI before rate matching	576		
	RM attribute	200-240		

7.2.8.1.3 TFCS

TFCS size	3
TFCS	(SRBs for CCCH/ BCCH, RB for CTCH) = (TF0, TF0), (TF1, TF0), (TF0, TF1)

7.2.8.2 Physical channel parameters

SCCPCH	DTX position	Flexible
	Spreading factor	256
	Number of TFCI bits/slot	2
	Number of Pilot bits/slot	0
	Number of data bits/slot	18
	Number of data bits/frame	270

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.3 Combinations on PRACH

7.3.1 Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH

See subclause 6.10.2.4.4.1 of [1].

The minimum UE class supporting this combination is UL: 32 kbps.

This is supported in Release '99.

7.3.2 Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH

See subclause 6.10.2.4.4.2 of [1].

The minimum UE class supporting this combination is UL: 32 kbps plus support for 5 AM entities.

This is supported in Release '99.

8 Examples of Radio Bearers and Signalling Radio Bearers for 3.84 Mcps TDD

8.1 Combinations on DPCH

8.1.1 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.3.4.1.1 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.2 Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.3 Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH

See subclause 6.10.3.4.1.3 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.4 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.4 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.5 Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.5 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.6 Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.6 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.7 Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.7 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.8 Conversational / speech / UL:6.7 DL: 6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.8 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.9 Conversational / speech / UL:5.9 DL:5.9 kbps / CS rab + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.9 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.10 Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.3.4.1.10 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.11 Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.3.4.1.11 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.12 Conversational / unknown / UL:28.8 DL:28.8kbps / CS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH

See subclause 6.10.3.4.1.12 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo coding, maximum TB bits 2560 and TB TC bits 1280, DL: 32kbps plus support for turbo coding, maximum TB bits 2560 and TB TC bits 1280.

This is supported in Release '99.

8.1.13 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.13 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32kbps plus support for turbo coding, maximum TB bits 2560 (Alt. 3840) and TB TC bits 1280 (Alt. 2560).

This is supported in Release '99.

8.1.14 Conversational / unknown / UL:32 DL: 32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.14 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for minimum SF 4, turbo coding, maximum TB bits 1280 (Alt. 2560) and TB TC bits 640 (Alt. 1280), DL: 32kbps plus support for turbo coding, maximum TB bits 1280(Alt. 2560) and TB TC bits 640 (Alt. 1280).

This is supported in Release '99.

8.1.15 Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.15 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo coding, maximum TB bits 1280 and TB TC bits 640, DL: 32kbps plus support for turbo coding, maximum TB bits 1280 and TB TC bits 640.

This is supported in Release '99.

8.1.16 Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.16 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo coding, maximum TB bits 2560 and TB TC bits 1280, DL: 32kbps plus support for turbo coding, maximum TB bits 2560 and TB TC bits 1280.

This is supported in Release '99.

8.1.17 Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.17 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 64kbps plus support for turbo coding, maximum TB bits 2560, and maximum TC TB bits 2560.

This is supported in Release '99.

8.1.18 Streaming / unknown / UL:0 DL: 64 kbps / CS or PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.18 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps plus support for turbo coding, maximum TB bits 3840, maximum TC TB bits 2560, and maximum 16 TBs per TTI.

This is supported in Release '99.

8.1.19 Streaming / unknown / UL: 64 DL:0 kbps / CS or PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.19 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI, and 2 physical channels per TS, DL: 32kbps.

This is supported in Release '99.

8.1.20 Interactive or background / UL: 32 DL:8 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.23 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, or alternatively plus support for maximum CC TB bits 1280 if turbo coding is not used; DL: 32kbps plus support for turbo coding plus maximum TC TB bits 640, or alternatively, not support for turbo coding if convolutional coding with rate 1/3 is used.

This is supported in Release '99.

8.1.21 Interactive or background / UL: 64 DL: 8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.24 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for 2 physical channels per TS, DL: 32kbps plus support for turbo coding, maximum TC TB bits 640, or alternatively not support for turbo coding if convolutional coding with rate 1/3 is used.

This is supported in Release '99.

8.1.22 Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.25 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, or (alternatively plus support for maximum CC TB bits 1280 if convolutional coding with rate 1/3 is used instead of turbo coding); DL: 32kbps plus support for turbo coding, maximum TB bits 2560, and maximum TC TB bits 2560.

This is supported in Release '99.

8.1.23 Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.26 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for 2 physical channels per TS; DL: 32kbps plus support for turbo coding, maximum TB bits 2560, and maximum TC TB bits 2560.

This is supported in Release '99.

8.1.24 Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.27 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for 2 physical channels per TS; DL: 32 kbps plus support for turbo coding, maximum TB bits 3840, maximum TC TB bits 3840, and maximum 16 TBs per TTI.

This is supported in Release '99.

8.1.25 Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.28 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI; DL: 32 kbps plus support for turbo coding, maximum TB bits 3840, maximum TC TB bits 3840, and maximum 16 TBs per TTI.

This is supported in Release '99.

8.1.26 Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.29 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for 2 physical channels per TS;; DL: 64 kbps plus support for maximum 16 TBs per TTI.

This is supported in Release '99.

8.1.27 Interactive or background / UL: 144 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.30 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI, and 2 physical channels per TS; DL: 64 kbps plus support for maximum 16 TBs per TTI.

This is supported in Release '99.

8.1.28 Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.31 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for 2 physical channels per TS; DL: 128kbps plus support for 16 physical channels per frame, or (if an alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400, and maximum 32 TBs per TTI).

This is supported in Release '99.

8.1.29 Interactive or background / UL: 64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.32 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for 2 physical channels per TS; DL: 384kbps or if an alternative RAB is used, support for maximum TB bits 8960, maximum TC TB bits 8960.

This is supported in Release '99.

8.1.30 Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.33 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI; DL: 384kbps or (if an alternative RAB is used, support for maximum TB bits 8960, maximum TC TB bits 8960).

This is supported in Release '99.

8.1.31 Interactive or background / UL:384 DL:384 kbps / PS RAB +UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.34 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for maximum TB bits 8960, maximum TC TB bits 8960, and maximum 32 TBs per TTI, or if an alternative RAB is used, plus support for maximum TB bits 5120, maximum TC TB bits 5120, and maximum 16 TBs per TTI; DL: 384kbps or if an alternative RAB is used, plus support for maximum TB bits 8960, maximum TC TB bits 8960.

This is supported in Release '99.

8.1.32 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.35 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for 2 physical channels per TS; DL: 2048kbps plus support for maximum TB bits 40960 and maximum TB TC bits 40960, or if an alternative RAB is used, plus support for maximum TB bits 81920 and maximum TC TB bits 81920.

This is supported in Release '99.

8.1.33 Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.36 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI; DL: 2048kbps plus support for maximum TB bits 40960 and maximum TB TC bits 40960, or if an alternative RAB is used, plus support for maximum TB bits 81920 and maximum TB TC bits 81920.

This is supported in Release '99.

8.1.34 Interactive or background / UL: 384 DL:2048 kbps / PS RAB+UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.37 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for maximum TB bits 8690, maximum TC TB bits 8690, and maximum 32 TBs per TTI, or if an alternative RAB is used, plus support for maximum TB bits 5120, maximum TC TB bits 5120 and maximum 16 TBs per TTI; DL: 2048 kbps plus support for maximum TB bits 40960, maximum TB TC bits 40960, optional SF 1, or if an alternative RAB is used, plus support for maximum TB bits 81920 and maximum TB TC bits 81920..

This is supported in Release '99.

8.1.35 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.38 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, or if turbo coding is alternatively not used, support for maximum CC TB bits 1280; DL: 32 kbps plus support for Turbo coding, maximum TC TB bits 640, and maximum TB bits 1280, or alternatively, if convolutional coding with rate 1/3 is used instead of turbo coding, support for maximum CC TB bits 1280.

This is supported in Release '99.

8.1.36 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.39 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, alternatively, if convolutional coding with rate 1/3 is used instead of turbo coding, support for maximum TC TB bits 1280; DL: 32 kbps plus support for turbo coding, maximum TB bits 2560, maximum TC TB bits 2560.

This is supported in Release '99.

8.1.37 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.40 of [1].

The minimum UE classes supporting this combination are UL: 64kbps ; DL: 32 kbps plus support for turbo coding, maximum TB bits 2560, and maximum TC TB bits 2560.

This is supported in Release '99.

8.1.38 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.41 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 128 kbps.

This is supported in Release '99.

8.1.39 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.42 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 128kbps plus support of 20 physical channels per frame and 10 physical channels per TS, or if an alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400, and maximum 32 TBs per TTI.

This is supported in Release '99.

8.1.40 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.43 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 384 kbps plus, or if an alternative RAB is used, support for maximum TB bits 8960, maximum TC TB bits 8960.

This is supported in Release '99.

8.1.41 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.44 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support for maximum 16 TBs per TTI, and 2 physical channels per TS; DL: 2048 kbps plus support for maximum TB bits 40960, maximum TC TB bits 40960, or if an alternative RAB is used, plus support for maximum TB bits 81920 and maximum TB TC bits 81920.

This is supported in Release '99.

8.1.42 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.45 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support 2 physical channels per TS; DL: 32 kbps plus turbo coding, maximum TB bits 3840 and maximum TC TB bits 2560.

This is supported in Release '99.

8.1.43 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.46 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps DL: 32 kbps plus support for turbo coding, maximum TB bits 3840, maximum TC TB bits 2560, and maximum 16 TBs per TTI.

This is supported in Release '99.

8.1.44 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.49 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps plus turbo coding, maximum TB bits 2560, maximum TC TB bits 1280, or if the alternative RAB is used, plus support for maximum TB bits 3840 and maximum TC TB bits 2560.

This is supported in Release '99.

8.1.45 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.50 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support of SF1, or if the alternative RAB is used, maximum TB bits 6400, maximum TC TB bits 5120, and maximum 16 TBs per TTI; DL: 128 kbps or if the alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 5120.

This is supported in Release '99

8.1.46 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.51 of [1].

The minimum UE classes for this combinations are UL: 64 kbps; DL: 32 kbps plus support for turbo coding, maximum TB bits 3840, maximum TC TB bits 3840, or if the RAB is used, plus support for maximum TB bits 5120, maximum TC TB bits 5120, and maximum 16 TBs per TTI.

This is supported in Release '99.

8.1.47 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.52 of [1].

The minimum UE classes for this combination are UL: 64 kbps ; DL: 128kbps plus support for maximum TB bits 5120, maximum TC TB bits 5120, or if the alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400).

This is supported in Release '99.

8.1.48 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.53 of [1].

The minimum UE classes for this combination are UL: 64kbps plus support for support for maximum TB bits 5120, maximum TC TB bits 5120, and maximum 16 TBs per TTI, and 2 physical channels per TS, or if the alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400); DL: 128 kbps plus support for support for maximum TB bits 5120, maximum TC TB bits 5120, or if the RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400.

This is supported in Release '99.

8.1.49 Interactive or background / UL:64 DL:128 kbps / PS RAB + streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH

See subclause 6.10.3.4.1.54 of [1].

The minimum UE classes for this combination are UL: 64 kbps plus support for 2 physical channels per TS; DL: 128 kbps plus support for maximum TB bits 6400, maximum TC TB bits 6400, and maximum 32 TBs per TTI.

This is supported in Release '99.

8.2 Combinations on PDSCH, SCCH, PUSCH and PRACH

8.2.1 Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.10.3.4.2.1 of [1].

The minimum UE classes supporting this combination are UL: 128kbps (See Note), DL: 128kbps plus support for 21 physical channels per frame, maximum TB bits (Alt. 7680), TB CC bits 1280, TB TC bits (Alt. 6400) and (Alt. TTI TB 32).

NOTE: Physical parameters for this RAB define two UL codes and one timeslot. To avoid the UL multicode requirement only supported by the 768kbs class, a second timeslot is provided for the PUSCH.

This is supported in Release '99.

8.2.2 Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.10.3.4.2.2 of [1].

The minimum UE classes supporting this combination are UL: 128kbps (See Note), DL: 384kbps plus support for 29 physical channels per frame, maximum TB bits (Alt. 10240), TB CC bits 1280, and TB TC bits (Alt. 8960).

NOTE: Physical parameters for this RAB define two UL codes and one timeslot. To avoid the UL multicode requirement only supported by the 768kbs class, a second timeslot is provided for the PUSCH.

This is supported in Release '99.

8.2.3 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.10.3.4.2.3 of [1].

The minimum UE classes supporting this combination are UL: 128kbps (See Note), DL: 2Mbps plus support for 137 physical channels per frame, maximum TB bits 40960 (Alt. 81920), TB CC bits 1280, and TB TC bits 40960 (Alt. 81920).

NOTE: Physical parameters for this RAB define two UL codes and one timeslot. To avoid the UL multicode requirement only supported by the 768kbs class, a second timeslot is provided for the PUSCH.

This is supported in Release '99.

8.3 Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH

8.3.1 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.10.3.4.3.1 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for maximum CC TB bits 1280, and maximum 16 TBs per TTI, 2 physical channels per TS; DL: 384kbps plus support for maximum CC TB bits 1280, or if the alternative RAB is used, support for maximum TB bits 7680.

NOTE: It is assumed that the DPCH DL, PDSCH and SCCPCH use different TS.

This is supported in Release '99.

8.3.2 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.10.3.4.3.2 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for maximum CC TB bits 1280, maximum 16 TBs per TTI, and 2 physical channels per TS ; DL: 384kbps plus support for maximum CC TB bits 1280, 31 physical channels per frame, or if the alternative RAB is used, support for maximum TB bits 10240, maximum TC TB bits 8960, and maximum 48 TBs per TTI.

NOTE: It is assumed that the DPCH DL, PDSCH and SCCPCH use different TS.

This is supported in Release '99.

8.3.3 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.10.3.4.3.3 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for maximum CC TB bits 1280, maximum 16 TBs per TTI, and 2 physical channels per TS; DL: 2048kbps plus support for maximum TB bits 40960, maximum TC TB bits 40960, and maximum CC TB bits 1280, 139 physical channels per frame, or if the alternative RAB is used, support for maximum TB bits 81920, maximum TC TB bits 81920.

This is supported in Release '99.

8.4 Combinations on SCCPCH

8.4.1 Stand – alone signalling RB for PCCH

See subclause 6.10.3.4.4.1 of [1].

The minimum UE class supporting this combination is DL: 32 kbps. This is supported in Release '99

8.4.2 Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.3.4.4.2 of [1].

The minimum UE class supporting this combination is DL: 32 kbps plus turbo coding, maximum TB bits 2560, maximum CC TB bits 1280, and maximum TC TB bits 1280.

This is supported in Release '99.

8.4.3 Interactive / Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.3.4.4.3 of [1].

The minimum UE class supporting this combination is DL: 32 kbps plus turbo coding, maximum TB bits 2560, maximum CC TB bits 2560, and maximum TC TB bits 1280, maximum 48 TFC, or if the alternative RAB is used, support for maximum 16 TBs per TTI, and maximum 64 TFC.

This is supported in Release '99.

8.5 Combinations on PRACH

8.5.1 SRB for CCCH + SRB for DCCH

See subclause 6.10.3.4.5.1 of [1].

The minimum UE class supporting this combination is UL: 32 kbps. This is supported by Release '99.

9 Examples of Radio Bearers and Signalling Radio Bearers for 1.28 Mcps TDD

9.1 Combinations on DPCH

9.1.1 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.11.5.4.1.1 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.2 Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.2 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.3 Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH

See subclause 6.11.5.4.1.3 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.4 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.4 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.5 Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.5 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.6 Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.6 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.7 Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.7 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.8 Conversational / speech / UL:6.7 DL: 6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.8 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.9 Conversational / speech / UL:5.9 DL:5.9 kbps / CS rab + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.9 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.10 Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.11.5.4.1.10 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.11 Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.11.5.4.1.11 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.12 Conversational / unknown / UL:28.8 DL:28.8kbps / CS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH

See subclause 6.11.5.4.1.12 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo coding, maximum TB bits 2560 and TB TC bits 1280, DL: 32kbps plus support for turbo coding, maximum TB bits 2560 and TB TC bits 1280.

This is supported in Release 4.

9.1.13 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.13 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32kbps plus support for turbo coding, maximum TB bits 2560 (Alt. 3840) and TB TC bits 1280 (Alt. 2560).

This is supported in Release 4.

9.1.14 Conversational / unknown / UL:32 DL: 32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.14 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo coding, maximum TB bits 1280 (Alt. 2560) and TB TC bits 640 (Alt. 1280), DL: 32kbps plus support for turbo coding and maximum TB bits 1280(Alt. 2560) and TB TC bits 640 (Alt. 1280).

This is supported in Release 4.

9.1.15 Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.15 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo coding, maximum TB bits 1280 and TB TC bits 640, DL: 32kbps plus support for turbo coding, maximum TB bits 1280 and TB TC bits 640.

This is supported in Release 4.

9.1.16 Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.16 of [1].

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo coding, maximum TB bits 2560 and TB TC bits 1280; DL: 32kbps plus support for turbo coding, maximum TB bits 2560 and TB TC bits 1280.

This is supported in Release 4.

9.1.17 Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.17 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 32kbps plus support for turbo coding, maximum TB bits 2560, and maximum TC TB bits 2560.

This is supported in Release 4.

9.1.18 Streaming / unknown / UL:0 DL: 64 kbps / CS or PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.18 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps plus support for turbo coding, maximum TB bits 3840, maximum TC TB bits 2560, and maximum 16 TBs per TTI.

This is supported in Release 4.

9.1.19 Streaming / unknown / UL: 64 DL:0 kbps / CS or PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.19 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI; DL: 32kbps.

This is supported in Release 4.

9.1.20 Interactive or background / UL: 32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.23 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, or alternatively plus support for maximum CC TB bits 1280 if turbo coding is not used; DL: 32kbps plus support for turbo coding plus maximum TC TB bits 640, or alternatively, not support for turbo coding if convolutional coding with rate 1/3 is used.

This is supported in Release 4.

9.1.21 Interactive or background / UL: 64 DL: 8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.24 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 32kbps plus support for turbo coding, maximum TC TB bits 640, or alternatively not support for turbo coding if convolutional coding with rate 1/3 is used.

This is supported in Release 4.

9.1.22 Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.25 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, or ir alternatively plus support for maximum CC TB bits 1280 if convolutional coding with rate 1/3 is used instead of turbo coding; DL: 32kbps plus support for turbo coding, maximum TB bits 2560, and maximum TC TB bits 2560.

This is supported in Release 4.

9.1.23 Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.26 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 32kbps plus support for turbo coding, maximum TB bits 2560, and maximum TC TB bits 2560.

This is supported in Release 4.

9.1.24 Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.27 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 128kbps.

This is supported in Release 4.

9.1.25 Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.28 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI, and SF 1; DL: 128kbps.

This is supported in Release 4.

9.1.26 Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.29 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 128kbps.

This is supported in Release 4.

9.1.27 Interactive or background / UL: 144 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.30 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI, SF 1, and alternatively to support for 8PSK if QPSK is not used; DL: 128kbps.

This is supported in Release 4.

9.1.28 Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.31 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 128 kbps plus support for optional SF 1, or if an alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400, and maximum 32 TBs per TTI.

This is supported in Release 4.

9.1.29 Interactive or background / UL: 64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.32 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 128 kbps plus maximum TB bits 5120, maximum TC TB bits 5120, SF 1, and 8PSK if QPSK is not used, or if an alternative RAB is used, support for maximum TB bits 8960, maximum TC TB bits 8960, and maximum 32 TBs per TTI.

This is supported in Release 4.

9.1.30 Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.33 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI, and SF 1; DL: 128 kbps plus maximum TB bits 5120, maximum TC TB bits 5120, optional SF 1, and 8PSK if QPSK is not used, or if an alternative RAB is used, support for maximum TB bits 8960, maximum TC TB bits 8960, and maximum 32 TBs per TTI.

This is supported in Release 4.

9.1.31 Interactive or background / UL:384 DL:384 kbps / PS RAB +UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.34 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for maximum TB bits 8960, maximum TC TB bits 8960, and maximum 32 TBs per TTI, SF 1, and 8PSK if QPSK is not used, or if an alternative RAB is used, plus support for maximum TB bits 5120, maximum TC TB bits 5120, and maximum 16 TBs per TTI); DL: 384kbps plus support for SF 1, 8PSK if QPSK is not used, or if an alternative RAB is used, plus support for maximum TB bits 8960, maximum TC TB bits 8960.

This is supported in Release 4.

9.1.32 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.35 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 2048kbps plus support for maximum TB bits 40960 and maximum TB TC bits 40960, and SF 1.

This is supported in Release 4.

9.1.33 Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.36 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support for maximum 16 TBs per TTI, and SF 1; DL: 2048kbps plus support for maximum TB bits 40960 and maximum TB TC bits 40960, and SF 1.

This is supported in Release 4.

9.1.34 Interactive or background / UL: 384 DL:2048 kbps / PS RAB+UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.37 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for maximum TB bits 8690, maximum TC TB bits 8690, and maximum 32 TBs per TTI, SF 1, and 8PSK if QPSK is not used, or if an alternative RAB is used, plus support for maximum TB bits 5120, maximum TC TB bits 5120 and maximum 16 TBs per TTI; DL: 2048 kbps plus support for maximum TB bits 40960, maximum TB TC bits 40960.

This is supported in Release 4.

9.1.35 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.38 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, or alternatively if turbo coding is not used, support for maximum CC TB bits 1280; DL: 32kbps plus support for Turbo coding, maximum TC TB bits 640, and maximum TB bits 1280, or alternatively, if convolutional coding with rate 1/3 is used instead of turbo coding, support for maximum CC TB bits 1280.

This is supported in Release 4.

9.1.36 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.39 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, or alternatively, if convolutional coding with rate 1/3 is used instead of turbo coding, support for maximum TC TB bits 1280; DL: 64kbps.

This is supported in Release 4.

9.1.37 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.40 of [1].

The minimum UE classes supporting this combination are UL: 64kbps plus support of SF 1; DL: 64 kbps.

This is supported in Release 4.

**9.1.38 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.41 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support of SF 1; DL: 128 kbps plus support for 8PSK if QPSK is not used.

This is supported in Release 4.

**9.1.39 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.42 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support of SF 1; DL: 128kbps plus support of 8PSK if QPSK is not supported, or if an alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400, and maximum 32 TBs per TTI.

This is supported in Release 4.

**9.1.40 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.43 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support of SF1; DL: 384 kbps plus support for optional SF 1, 8PSK if QPSK is not used, or if an alternative RAB is used, support for maximum TB bits 8960, maximum TC TB bits 8960.

This is supported in Release 4.

**9.1.41 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:128 DL:2048 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.44 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support for maximum 16 TBs per TTI, SF1, and 8PSK if QPSK is not used; DL: 2048 kbps plus support for maximum TB bits 40960, maximum TC TB bits 40960, SF 1, or if an alternative RAB is used, plus support for maximum TB bits 81920 and maximum TB TC bits 81920.

This is supported in Release 4.

**9.1.42 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.45 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps.

This is supported in Release 4.

**9.1.43 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.46 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps; DL: 64 kbps plus support for maximum 16 TBs per TTI.

This is supported in Release 4.

**9.1.44 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.49 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support of SF1; DL: 64 kbps.

This is supported in Release 4.

**9.1.45 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.50 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support of SF1, or if the alternative RAB is used, maximum TB bits 6400, maximum TC TB bits 5120, and maximum 16 TBs per TTI; DL: 128 kbps plus support for 15 physical channels per TS, or if the alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 5120.

This is supported in Release 4.

**9.1.46 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.51 of [1].

The minimum UE classes for this combinations are UL: 64 kbps plus support of SF1; DL: 32 kbps plus support for turbo coding, maximum TB bits 3840, maximum TC TB bits 3840, SF1, or if the RAB is used, plus support for maximum TB bits 5120, maximum TC TB bits 5120, and maximum 16 TBs per TTI.

This is supported in Release 4.

**9.1.47 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.52 of [1].

The minimum UE classes for this combination are UL: 64 kbps plus support of SF1; DL: 128kbps plus support for maximum TB bits 5120, maximum TC TB bits 5120, 24 physical channels per subframe, or if the alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400.

This is supported in Release 4.

9.1.48 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.53 of [1].

The minimum UE classes for this combination are UL: 64kbps plus support for support for maximum TB bits 5120, maximum TC TB bits 5120, and maximum 16 TBs per TTI, SF1, and 8PSK if QPSK is not used, or if the alternative RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400); DL: 128 kbps plus support for support for maximum TB bits 5120, maximum TC TB bits 5120, 24 physical channels per subframe, or (if the RAB is used, plus support for maximum TB bits 6400, maximum TC TB bits 6400).

This is supported in Release 4.

9.1.49 Interactive or background / UL:64 DL:128 kbps / PS RAB + streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH

See subclause 6.11.5.4.1.54 of [1].

The minimum UE classes for this combination are UL: 64 kbps; DL: 128 kbps plus support for maximum TB bits 6400, maximum TC TB bits 6400, and maximum 32 TBs per TTI, and 24 physical channels per subframe.

This is supported in Release 4.

9.2 Combinations on PDSCH, SCCH, PUSCH and PRACH

9.2.1 Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.11.5.4.2.1 of [1].

The minimum UE classes supporting this combination are UL: 128kbs plus support for SF 1; DL: 384kbs plus support for (Alt. 8PSK), maximum TB bits (Alt. 7680), TB CC bits 1280, TB TC bits (Alt. 6400) and (Alt. TTI TB 32).

This is supported in Release 4.

9.2.2 Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.11.5.4.2.2 of [1].

The minimum UE classes supporting this combination are UL: 128kbs plus support for SF 1, DL: 384kbs (with SF 1 option) plus support for maximum TB bits (Alt. 10240), TB CC bits 1280, and TB TC bits (Alt. 8960).

This is supported in Release 4.

9.2.3 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.11.5.4.2.3 of [1].

The minimum UE classes supporting this combination are UL: 128kbs plus support for SF 1, DL: 2Mbps plus support for maximum TB bits 40960 (Alt. 81920) and TB CC bits 1280.

This is supported in Release 4.

9.3 Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH

9.3.1 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.11.5.4.3.1 of [1].

The minimum UE classes supporting this combination are UL: 128kpbs plus support for maximum CC TB bits 1280, maximum 16 TBs per TTI, and SF 1 for PUSCH; DL: 384kpbs plus support for maximum CC TB bits 1280, 5 TS per subframe, optional SF 1, 8PSK if QPSK is not used for PDSCH, or if the alternative RAB is used, support for maximum TB bits 7680.

PS. Assume the DPCH DL, PDSCH and SCCPCH use different TS.

This is supported in Release 4.

9.3.2 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.11.5.4.3.2 of [1].

The minimum UE classes supporting this combination are UL: 128kpbs plus support for maximum CC TB bits 1280, maximum 16 TBs per TTI, and SF 1 for PUSCH; DL: 384kpbs plus support for maximum CC TB bits 1280, 5 TS per subframe, optional SF 1 for PDSCH, or if the alternative RAB is used, support for maximum TB bits 10240, maximum TC TB bits 8960, and maximum 48 TBs per TTI.

PS. Assume the DPCH DL, PDSCH and SCCPCH use different TS.

This is supported in Release 4.

9.3.3 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.11.5.4.3.3 of [1].

The minimum UE classes supporting this combination are UL: 128kpbs plus support for maximum CC TB bits 1280, maximum 16 TBs per TTI, and SF 1 for PUSCH; DL: 2048kpbs plus support for maximum TB bits 40960, maximum TC TB bits 40960, and maximum CC TB bits 1280, 5 TS per subframe, optional SF 1 for PDSCH, or if the alternative RAB is used, support for maximum TB bits 81920, maximum TC TB bits 81920.

This is supported in Release 4.

9.4 Combinations on SCCPCH

9.4.1 Stand – alone signalling RB for PCCH

See subclause 6.11.5.4.4.1 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release 4.

9.4.2 Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.11.5.4.4.2 of [1].

The minimum UE class supporting this combination is DL: 64 kbps plus support for maximum CC TB bits 1280.

This is supported in Release 4.

9.4.3 Interactive / Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.11.5.4.4.3 of [1].

The minimum UE class supporting this combination is DL: 64 kbps plus support for maximum CC TB bits 2560, or if the alternative RAB is used, support for maximum 16 TBs per TTI, and maximum 64 TFC.

This is supported in Release 4.

9.5 Combinations on PRACH

9.5.1 SRB for CCCH + SRB for DCCH

See subclause 6.11.5.4.5.1 of [1].

The minimum UE class supporting this combination is UL: 32 kbps.

This is supported in Release 4.

Annex A: Service scenarios

This chapter presents a selection of service scenarios, which are used as a basis for the RAB scenarios. Only the basic scenarios having impact on the lower layers are considered. Because the real time applications have the tightest connection with the lower layers, the real time scenarios are studied more in detail in this document. Other scenarios can be derived as combinations of these basic scenarios.

Even though these scenarios are for IMS, they are applicable also for non-IMS PS scenarios. The differences between IMS and non-IMS are small in RAN level: Usually, the difference is that in non-IMS cases the IMS signalling stream is left out or replaced by non-IMS signalling stream. Other differences are indicated later in the text, whenever necessary.

Table A-1: Service scenarios

		IMS Signalling	Speech (RTP)	Speech (RTCP)	Audio (RTP)	Audio (RTCP)	Video (RTP)	Video (RTCP)	Text (RTP)	Text (RTCP)	Data	Notes
1	Speech	X	X	X	-	-	-	-	-	-	O	
2	Audio	X	-	-	X	X	-	-	-	-	O	
3	Video	X	-	-	-	-	X	X	-	-	O	
4	Text	X	-	-	-	-	-	-	X	X	O	
5	Speech, Video	X	X	X	-	-	X	X	-	-	O	
6	Audio, Video	X	-	-	-	-	X	X	X	X	O	
7	Speech, Text	X	-	-	X	X	X	X	-	-	O	
8	Video, Text	X	X	X	-	-	-	-	X	X	O	
9	Speech, Video, Text	X	X	X	-	-	X	X	X	X	O	
10	Audio, Text	X	-	-	X	X	-	-	X	X	O	
11	Audio, Video, Text	X	-	-	X	X	X	X	X	X	O	
X = stream included in scenario - = stream not included in scenario O = stream optionally included in scenario												

NOTE: In some 3GPP specifications (e.g., [10]) "audio" and "speech" are not separated, but handled under title "audio".

In most of the scenarios, the services can be either streaming or conversational. For PS streaming, there is no full IMS support in Release 5. However, this does not have major impact on the items presented in this document.

The protocol layers of the scenarios are presented in Figure A-1 for conversational and in Figure A-2 for streaming services ([10], [11]).

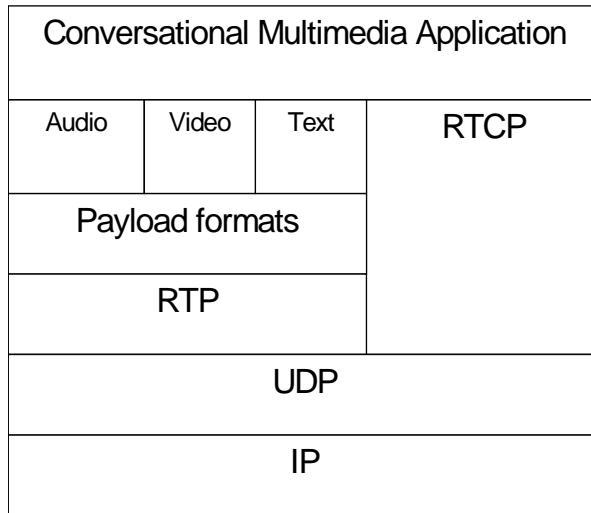


Figure A-1 – User plane protocol stack for conversational multimedia terminal

The protocol layers for IMS signalling stream, not presented in the figure, are (SDP/)SIP/UDP/IP.

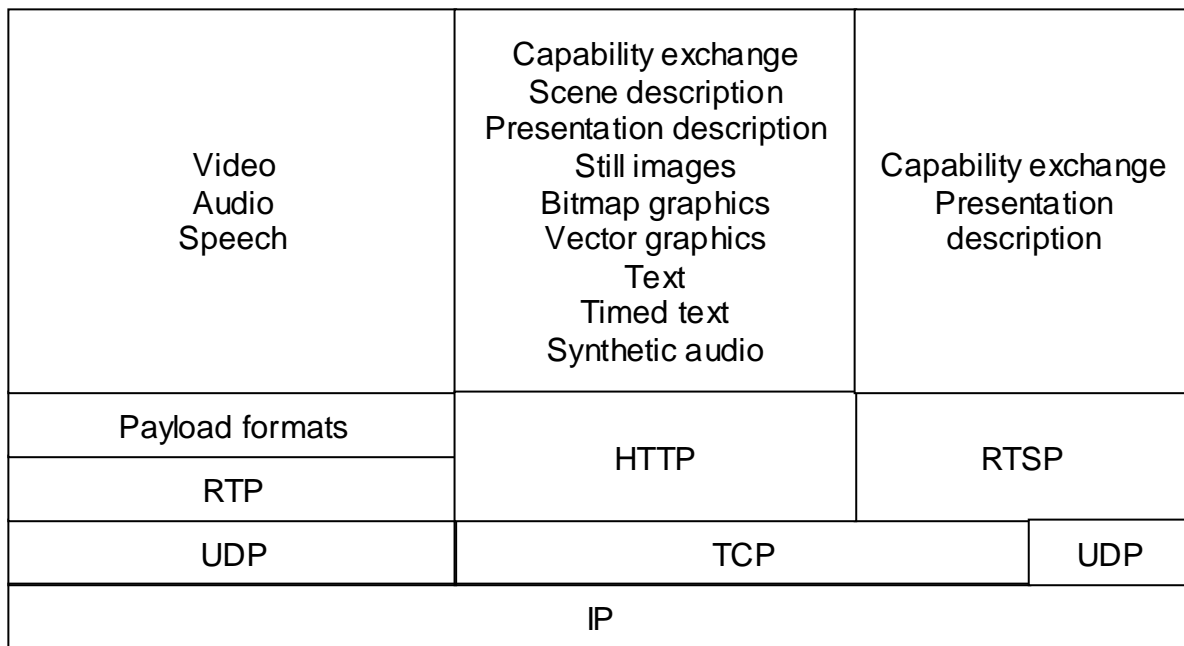


Figure A-2: Protocol stack for PS streaming terminal

A.1 Common characteristics of scenarios

The characteristics of the streams in the next sub-chapters are common to all or most of the scenarios.

In scenarios, where the IP protocol header size or contents are relevant, it is assumed that IPv6 header without extension headers is used, i.e., the IP header size is 40 bytes. The UDP header size is 8 bytes.

A.1.1 RTP and RTCP streams

A.1.2 Signalling stream

A.1.3 Data stream

The data stream may be used to carry any background or interactive data. Examples on data are still images, graphics, and scene / presentation descriptions, shown in Figure A-2 and [11], as well as web browsing and/or file download. Low delay is not guaranteed, and the data rates may vary between 0 kbps and the maximum bit rate of the context.

A.2 Scenarios

In each of the scenarios, there is also an additional PDP context for SIP or RTSP, and optionally one or more PDP contexts for data. Which PDP contexts are primary or secondary, is not relevant for RAB scenarios.

A.2.1 Speech

For the IMS speech service, the parameters that the transmitter should use (and the receiver shall at least support) are defined more precisely than for any other service in [10].

NOTE: Speech is defined under the term "audio" in [10].

Both AMR and AMR-WB are included. The parameters for speech are presented below, derived from [10] and [13]:

Table A.2.1-1: Conversational IMS speech service parameters

		Selection or parameter value		Notes
	Nr of AMR / AMR-WB frames in RTP packet	One		Min. 20 ms packet interval RTP header adds 12 bytes
	AMR / AMR-WB payload mode	Bandwidth efficient		
	AMR , lowest and highest modes	AMR / AMR-WB mode	Payload bytes per frame	Payload bits include ARM data, payload header, table of contents and padding. Multi-channel session, interleaving or internal CRC not used. Size of SID frame is 7 bytes.
		4.75	14	
	AMR-WB, lowest and highest modes	12.2	32	
6.6		18		
	23.85	61		

For non-IMS services, the above-mentioned restrictions are not applicable. However, it can be assumed that the parameters for conversational VoIP services do not usually deviate significantly from those given above.

For speech streaming, the codecs are the same as above (AMR and AMR-WB) [11]. In [14], examples on streaming services are presented. The most important difference to the conversational parameters is that the number of speech frames in one RTP packet may be much larger (e.g., 10). On the other hand, the payload mode can be different (octet aligned), CRCs included etc. (as in [14]), which gives larger payload presented in table A.2.1-1.

A.2.2 Audio

"Audio" in this document refers to other than speech-based audio (music, combination of music and speech, etc...).

In [10] there is no distinction between audio and speech for conversational traffic. The default audio codecs for IMS are AMR and AMR-WB, hence the numbers in chapter A.2.1 are applicable.

According to [11], MPEG-4 AAC-LC codec should be supported for audio streaming, and in addition, also MPEG-4 AAC-LTP may be supported. As for the speech streaming, the RTP packets contain of several audio frames, as presented in [14].

A.2.3 Video

The video codecs have a wide range of possible bit rates and packet sizes. For streaming and conversational video, the codecs are H.263 and MPEG 4 (see [11] and [15]). RTP packet size is restricted in IMS conversational video to 512 bytes [10].

Examples on video streaming are presented in [14]. There is a wide range of RTP packet rates, depending on various factors, e.g., codec rate or packetization.

A.2.4 Text

According to [16], the data rate of T.140 text telephony over RTP is low: "The rate of character entry is usually at a level of a few characters per second or less. Therefore, the expected number of characters to transmit is low. Only one or a few new characters are expected to be transmitted with each packet". Hence, large part of the traffic consists of the overhead, i.e., RTP/UDP/IP headers and RTCP/UDP/IP packets. The data rate is mostly less than 1 kbps. Whenever the delay has to be guaranteed, the context cannot be of interactive or background traffic class, but e.g., streaming class has to be used.

It should be noted that text telephony does not include document viewing or other similar use, but only situations where the text is entered by human users in the both ends. For example, the "Text" service in Figure A-2 does not refer to text telephony.

A.2.5 Speech and video

There are basically two different alternatives, depending on whether audio and video streams are on the same or different PDP contexts. The former case is basically similar to the scenario in the chapter A.2.3. The latter case has different implications on lower layers. For streaming case with speech and video over the same context, there is an example in [14].

A.2.6 Audio and video

The difference in this scenario to the previous one is that the audio/speech coded may be different. On lower layers, this can be handled as the previous scenario.

A.2.7 Video, audio, or speech with text

The additional text telephony stream adds a low bit rate PDP context. Whenever there is a requirement to synchronize the text with the voice or video stream, the text telephony context delay parameters have to be aligned with those of the others (i.e., the delay requirement may be stricter than for stand-alone text telephony).

Annex B: Mapping of service scenarios to Radio Access Bearers

B.1 Common requirements

The bearers in this document shall be based entirely on existing 25-series specifications. That is, no requirement on RABs that is not in line with existing RAN specifications, shall be presented.

In this chapter, the main principles for selecting the parameters are presented.

B.2 Bearer characteristics

The following table lists general characteristics of the bearers in the scenarios:

	Parameter	Typical selection or parameter value	Notes
PDCP	PDCP header, bits	8	8 bit PDCP header is the default in the scenarios. (For lossless SRNS relocation support, PDCP header can also contain sequence number of 16 bits.)
	Header compression	RFC 3095 (ROHC)	ROHC assumed to compress [RTP/UDP/IP (and ESP/IP) traffic]. No ROHC context identifier needed: PID field (5 bits) of PDCP header is sufficient to indicate all ROHC contexts in the given scenarios. The most common header (shortest 2 nd order header) is 3 bytes when UDP checksum is present (with IPv6); see RLC payload sizes. ROHC feedback packets transmitted in opposite direction, interspersed with main flow packets. Segmentation of ROHC not in use, because only non-transparent RLC modes in these scenarios.
		RFC 2507	For TCP/IP compression (even though any IP headers, also those in UDP/IP could be compressed by RFC 2507). TCP/IP used in interactive and background, therefore no impact on RLC payload sizes
RLC			
	RLC mode	UM or AM	TM not possible because no a priori information on (compressed) IP packets, and no mechanism specified for negotiating ROHC packet sizes parameters. UM used for conversational traffic class, AM for all other classes.

	Payload sizes, bit		<p>Number of different payload sizes to be limited so that max size of TFCS is reasonably low.</p> <p>In some scenarios, one of payload sizes is IP payload with shortest ROHC header.</p> <p>For AM, default payload size is 320 bits</p>
	Max data rate, kbps		<p>The actual data rate on IP layer is somewhat different from this nominal figure, due to:</p> <ul style="list-style-type: none"> • PDCP header • Length indicator part of RLC header • Retransmissions (in AM) • Header compression
	UMD/AMD PDU header, bit	8 / 16	8 for UM, 16 for AM

Table B.2-1: Common characteristics of L2

In the scenarios, the RABs for data stream are not presented. Each of the scenarios may or may not have one or more RABs for data stream. The RABs can be selected from the interactive/background RABs.

B.3 RAB Scenarios

NOTE: The following RAB combinations are only examples of possible implementations of the scenarios.

Due to flexibility in RAN specifications (and in PDP context parameters) there is a large number of other possible RABs and their combinations that could implement the scenarios. There are also other RAB combinations applicable for other scenarios, not listed below.

This chapter concentrates on the basic scenarios of chapter A.2.1, thus excluding most of the combinations of multiple sessions.

Annex C: Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
09/2002	RP-17	RP-020663	-		Creation.	-	-
12/2002	RP-18	RP-020890	-		Merge of RP-020877 with RP-020814. Clause numbering changed. Approved at TSG RAN#18.	2.0.0	6.0.0
03/2003	RP-19	RP-030109	001		Streaming and interactive/background RAB combinations	6.0.0	6.1.0
	RP-19	RP-030109	002		QoS attributes for RABs in 25.993	6.0.0	6.1.0
	RP-19	RP-030109	003		TDD RABs in 25.993	6.0.0	6.1.0
06/2003	RP-20	RP-030288	004		Corrections to the UE capabilities and editorial changes	6.1.0	6.2.0
	RP-20	RP-030288	005		New configuration for CBS: CTCH, PCCH, 32kbps RAB and SRBs on 1 S-CCPCH	6.1.0	6.2.0
	RP-20	RP-030288	006		New SCCPCH Configurations	6.1.0	6.2.0
	RP-20	RP-030288	008		PS streaming and CS speech RAB combinations	6.1.0	6.2.0
	RP-20	RP-030288	009		RB configuration for the support of wideband AMR speech telephony services	6.1.0	6.2.0
	RP-20	RP-030288	010		Corrections on TDD RABs	6.1.0	6.2.0
09/2003	RP-21	RP-030497	012		IMS RAB scenarios	6.2.0	6.3.0
	RP-21	RP-030489	013		Addition of Streaming RABs	6.2.0	6.3.0
12/2003	RP-22	RP-030609	014		BTFD with Flexible TrCH position	6.3.0	6.4.0
	RP-22	RP-030609	015		Addition of Conversational – Interactive/Background RAB combination	6.3.0	6.4.0

History

Document history		
V6.4.0	December 2003	Publication