


**Universal Mobile Telecommunications System (UMTS);
Typical examples of Radio Access Bearers (RABs) and
Radio Bearers (RBs) supported by
Universal Terrestrial Radio Access (UTRA)
(3GPP TR 25.993 version 6.12.0 Release 6)**

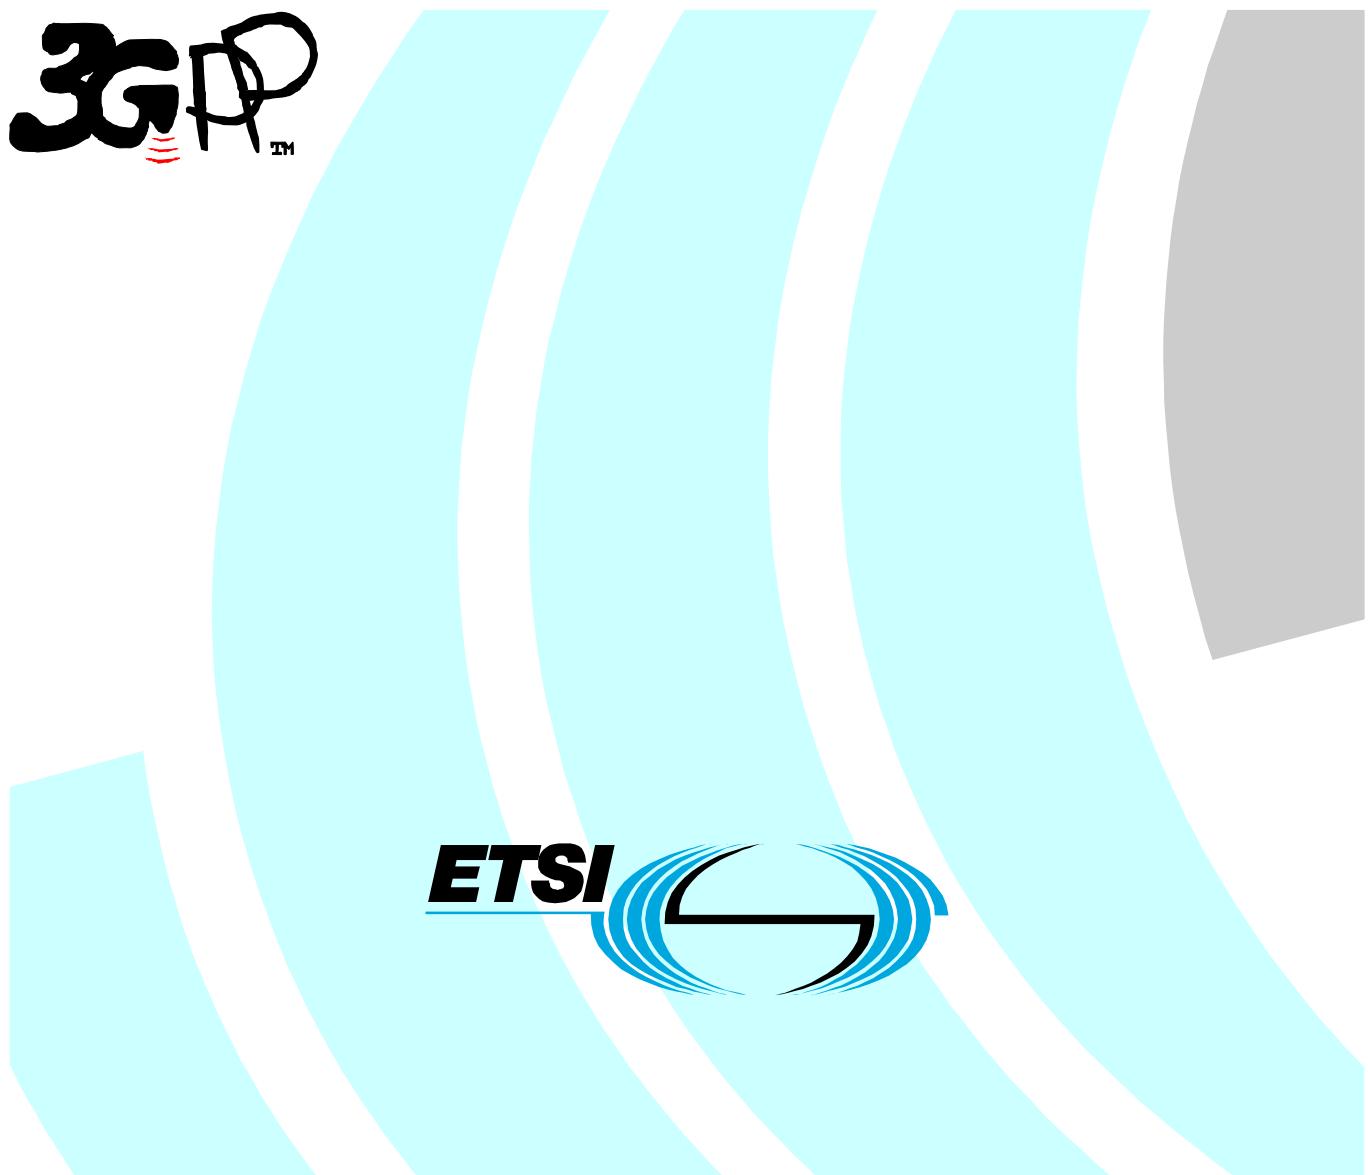

Reference

RTR/TSGR-0225993v6c0

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:
http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.
All rights reserved.

DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under
<http://webapp.etsi.org/key/queryform.asp>.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	16
1 Scope	17
2 References	17
3 Abbreviations and Terms	18
3.1 Abbreviations	18
3.2 Terms.....	18
4 QoS Architecture and RAB attributes	18
5 List of RABs and SRBs.....	20
5.1 Interactive or background class Radio Access Bearers (PS domain)	20
5.2 Streaming class Radio Access Bearers.....	21
5.2.1 CS domain	21
5.2.2 PS domain.....	21
5.3 Conversational class Radio Access Bearers	22
5.3.1 CS domain	22
5.3.2 PS domain.....	23
5.4 Signalling Radio Bearers (Control Plane)	23
6 Combinations of RABs	23
7 Examples of Radio Bearers and Signalling Radio Bearers for FDD.....	24
7.1 Combinations on DPCCH.....	24
7.1.1 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH	24
7.1.2 Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH	24
7.1.3 Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH	24
7.1.3a Stand-alone UL:27.2 DL:27.2 kbps SRBs for DCCH	24
7.1.4 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	26
7.1.5 Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	26
7.1.6 Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	26
7.1.7 Conversational / speech / UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	26
7.1.8 Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	26
7.1.9 Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.10 Conversational / speech / UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) kbps / CS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.11 Conversational / speech / UL:6.7 DL:6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.12 Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	27
7.1.12a Conversational / speech / UL:(5.9, 4.75) DL:(5.9, 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	27
7.1.12b Conversational / speech / UL:5.9 DL:5.9 (SF=128) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	29
7.1.13 Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH.....	30
7.1.14 Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH.....	30
7.1.15 Conversational / unknown / UL:28.8/DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	30
7.1.16 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	30
7.1.17 Conversational / unknown / UL:32 DL:32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	30
7.1.18 Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	30
7.1.19 Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	31
7.1.20 Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	31
7.1.21 Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	31

7.1.22	Streaming / unknown / UL:64 DL:0 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	33
7.1.23	Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	34
7.1.24	Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	35
7.1.25	Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	35
7.1.26	Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	36
7.1.27	Interactive or background / UL:32 DL:32 kbps / PS RAB (20 ms TTI)+ UL:3.4 DL:3.4 kbps SRBs for DCCH	36
7.1.28	Interactive or background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	37
7.1.29	Interactive or background / UL:32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	39
7.1.30	Interactive or background / UL:64 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	39
7.1.31	Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	40
7.1.32	Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	40
7.1.33	Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH	40
7.1.34	Interactive or background / UL:144 DL:144 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH	41
7.1.35	Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH	41
7.1.36	Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH	43
7.1.37	Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	44
7.1.38	Interactive or background / UL:384 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	44
7.1.39	Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	44
7.1.40	Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	45
7.1.41	Interactive or background / UL:384 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	45
7.1.42	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	46
7.1.43	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	46
7.1.44	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	47
7.1.45	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	47
7.1.45a	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB (20ms TTI)+ UL:3.4 DL:3.4 kbps SRBs for DCCH	48
7.1.46	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	49
7.1.47	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	49
7.1.48	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	50
7.1.49	Conversational / speech / UL: (12.2 7.95 5.9 4.75) kbps DL: (12.2 7.95 5.9 4.75) / CS RAB + Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	50
7.1.50	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	51
7.1.51	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	51
7.1.52	Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	52
7.1.53	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.....	52
7.1.54	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.....	53
7.1.55	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	53
7.1.56	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	54
7.1.57	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	55
7.1.58	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	56
7.1.59	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	56

7.1.60	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	57
7.1.61	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	57
7.1.62	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	58
7.1.63	Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	58
7.1.64	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	58
7.1.65	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	58
7.1.66	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	59
7.1.67	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	60
7.1.68	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	60
7.1.69	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	60
7.1.70	Interactive or background / UL:64 DL:128 kbps / PS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	61
7.1.71	Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	63
7.1.72	Interactive or background / UL:64 DL:64 kbps / PS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	63
7.1.73	Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	64
7.1.73a	Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH – Alternative	64
7.1.74	Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	66
7.1.75	Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	66
7.1.76	Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	68
7.1.77	Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	71
7.1.78	Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	73
7.1.79	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	75
7.1.79a	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH (L1 multiplexing) (FDD)	77
7.1.80	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	79
7.1.81	Streaming / unknown / UL:8 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	80
7.1.82	Streaming / unknown / UL:8 DL:32 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	82
7.1.83	Streaming / unknown / UL:32 DL:256 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	85
7.1.84	Interactive or background / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	87
7.1.85	Interactive or background / UL:64 DL:8 kbps / PS RAB + Interactive or Background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	89
7.1.86	Interactive or Background / UL:64 DL:128 kbps / PS RAB + Interactive or Background / UL:64 DL:128 kbps / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH	89

7.1.87	Interactive or Background / UL:64 DL:384 kbps / PS RAB + Interactive or Background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	90
7.1.88	Interactive or background / UL:128 DL:128 kbps / PS RAB + Interactive or Background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	91
7.1.89	Interactive or background / UL:128 DL:32 kbps / PS RAB + Interactive or Background / UL:128 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	93
7.1.90	Streaming / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	95
7.1.91	Streaming / unknown / UL:16 DL:32 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	95
7.1.92	Interactive or background / UL:16 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	95
7.1.93	Interactive or background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	95
7.1.94	Interactive or background / UL:16 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	96
7.1.95	Conversational / speech / UL:12.2 DL:12.2 kbps + Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	96
7.1.96	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:128 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	98
7.1.97	Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH	100
7.1.98	Interactive or background / UL:32 DL:64 kbps / PS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH (L1 multiplexing) (FDD).....	101
7.1.99	Interactive or background / UL:128 DL: 64k / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH.....	102
7.1.100	Interactive or background / UL:384 DL: 64k / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH.....	103
7.1.101	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	104
7.1.102	Interactive or background / UL:384 DL: 128kbps / PS RAB + UL:3.4 DL:3.4 kb/s Signalling Radio Bearers for DCCH	105
7.1.103	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:384 DL: 64kbps / PS RAB + UL:3.4 DL:3.4 kbps Signalling Radio Bearers for DCCH.....	106
7.1.104	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:384 DL: 128kbps / PS RAB + UL:3.4 DL:3.4 kbps Signalling Radio Bearers for DCCH.....	107
7.1.105	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:384 DL: 384kbps / PS RAB + UL:3.4 DL:3.4 kbps Signalling Radio Bearers for DCCH.....	108
7.1.106	Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	109
7.1.107	Conversational / speech / UL:(15.85 12.65 8.85 6.6) DL:(15.85 12.65 8.85 6.6) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	112
7.1.108	Conversational / speech / UL:(23.85 12.65 8.85 6.6) DL:(23.85 12.65 8.85 6.6) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	114
7.1.109	Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH	116
7.1.110	Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH.....	119
7.1.111	Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH.....	121
7.1.112	Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH	124
7.1.113	Conversational / speech / UL:12.2 DL:12.2 kbps + Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	126
7.1.113	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:64 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	127
7.1.114	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:32 DL:256 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	129

7.1.115	Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH.....	130
7.1.116	Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	132
7.1.117	Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH	134
7.1.118	Conversational / speech / UL:38.8 DL:38.8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH [Rel-6 onwards].....	134
7.1.119	Conversational / speech / UL:16.8 DL:16.8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH [Rel-6 onwards].....	137
7.1.120	Conversational / speech / UL: 40 DL: 40 kbps / PS RAB + Interactive or Background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH [Rel-5 only]	142
7.1.121	Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:27.2 DL:27.2 kbps SRBs for DCCH	145
7.1.122	Conversational / speech / UL:39.6 DL:39.6 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH [Rel-5]	146
7.1.123	Conversational / speech / UL:17.6 DL:17.6 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH [Rel-5]	150
7.1.124	Conversational / speech / UL: 39.2 DL: 39.2 kbps / PS RAB + Interactive or Background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	155
7.2	Combinations on S-CCPCH	158
7.2.1	Stand-alone signalling RB for PCCH	158
7.2.2	Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH	158
7.2.3	Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH.....	158
7.2.4	Interactive/Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH.....	158
7.2.5	16 kbps RB for CTCH + SRB for CCCH + SRB for BCCH.....	159
7.2.6	RB for CTCH + Interactive/Background 32 kbps PS RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH.....	159
7.2.7	Interactive/Background 16 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH.....	161
7.2.8	8 kbps RB for CTCH + SRB for CCCH + SRB for BCCH	162
7.2.9	Interactive/Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH.....	163
7.3	Combinations on PRACH	165
7.3.1	Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH	165
7.3.2	Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH	165
7.3.3	Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH	165
7.4.1	RB for Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	166
7.4.1b	Void	167
7.4.2	RB for Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	167
7.4.3	RB for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	168
7.4.3a	RB for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	169
7.4.4	RB for Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	169
7.4.4a	RB for Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	170

7.4.5	RB for Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	171
7.4.5a	RB for Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	172
7.4.6	Interactive or background / UL:128 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	172
7.4.7	RB for Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	173
7.4.8	RB for Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + RB for Interactive or background / UL:128 DL: [Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	174
7.4.9	Void	175
7.4.10	RB for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + RB for Interactive or background / UL:128 DL: [Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	175
7.4.11	Void	176
7.4.12	RB for Conversational / unknown / UL:64 DL:64 kbps / CS RAB + RB for Interactive or background / UL:128 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	176
7.4.14	RB for Streaming / unknown / UL:16 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + RB for Interactive or background / UL:128 DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	178
7.4.15	RB for Streaming / unknown / UL:64 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + RB for Interactive or background / UL:128 DL: [max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	180
7.4.16	RB for Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + RB for Streaming / unknown / UL:16 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + RB for Interactive or background / UL:128 DL: [max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	182
7.4.17	RB for Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + RB for Streaming / unknown / UL:128 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + RB for Interactive or background / UL:128 DL: [max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	184
7.4.18	RB for Streaming / unknown / UL:64 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	187
7.4.19	RB for Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH.....	188
7.4.20	RB for Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	189
7.4.21	RB for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	190
7.4.22	Conversational / unknown / UL:38.8 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + interactive / background UL: 16 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + interactive / background UL: 16 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.	191

7.4.23	Conversational / unknown / UL:16.8 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + interactive / background UL: 16 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + interactive / background UL: 16 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	193
7.4.24	Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + Interactive or Background / UL:384 DL:[Bit rate depending on the UE category] / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH	195
8	Examples of Radio Bearers and Signalling Radio Bearers for 3.84 Mcps TDD.....	196
8.1	Combinations on DPCH.....	196
8.1.1	Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH	196
8.1.2	Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH	196
8.1.3	Stand-aloneUL:13.6 DL:13.6 kbps SRBs for DCCH	196
8.1.4	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH...196	196
8.1.5	Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 kbps SRBs for DCCH	196
8.1.6	Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH....196	196
8.1.7	Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....197	197
8.1.8	Conversational / speech / UL:6.7 DL: 6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....197	197
8.1.9	Conversational / speech / UL:5.9 DL:5.9 kbps / CS rab + UL:3.4 DL:3.4 kbps SRBs for DCCH.....197	197
8.1.10	Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH....197	197
8.1.11	Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH....197	197
8.1.12	Conversational / unknown / UL:28.8 DL:28.8kbps / CS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH..197	197
8.1.13	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....198	198
8.1.14	Conversational / unknown / UL:32 DL: 32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH....198	198
8.1.15	Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....198	198
8.1.16	Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....198	198
8.1.17	Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH....198	198
8.1.18	Streaming / unknown / UL:0 DL: 64 kbps / CS or PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH....198	198
8.1.19	Streaming / unknown / UL: 64 DL:0 kbps / CS or PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH....198	198
8.1.20	Interactive or background / UL: 32 DL:8 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH	199
8.1.21	Interactive or background / UL: 64 DL: 8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	199
8.1.22	Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	199
8.1.23	Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH199	199
8.1.24	Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	199
8.1.25	Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	199
8.1.26	Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	200
8.1.27	Interactive or background / UL: 144 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	200
8.1.28	Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	200
8.1.29	Interactive or background / UL: 64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	200
8.1.30	Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	200
8.1.31	Interactive or background / UL:384 DL:384 kbps / PS RAB +UL:3.4 DL:3.4 kbps SRBs for DCCH	200
8.1.32	Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	201
8.1.33	Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	201
8.1.34	Interactive or background / UL: 384 DL:2048 kbps / PS RAB+UL:3.4 DL:3.4 kbps SRBs for DCCH	201
8.1.35	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	201
8.1.36	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	201
8.1.37	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	201
8.1.38	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	202
8.1.39	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	202
8.1.40	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	202
8.1.41	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	202

8.1.42	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	202
8.1.43	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	203
8.1.44	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	203
8.1.45	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	203
8.1.46	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	203
8.1.47	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	203
8.1.48	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	203
8.1.49	Interactive or background / UL:64 DL:128 kbps / PS RAB + streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4kpbs SRBs for DCCH.....	204
8.1.50	Conversational / Speech UL:(12.2-7.95-5.9-4.75) & DL:(12.2-7.95-5.9-4.75) CS RAB + UL:3.4 & DL 3.4kbps SRBs for DCCH.....	204
8.1.51	Conversational / Speech UL:(10.2-6.7-5.9-4.75) & DL:(10.2-7.95-5.9-4.75) CS RAB + UL:3.4 & DL 3.4kbps SRBs for DCCH.....	204
8.1.52	Conversational / Speech UL:(7.4-6.7-5.9-4.75) & DL:(7.4-6.7-5.9-4.75) CS RAB + UL:3.4 & DL 3.4kbps SRBs for DCCH	204
8.1.53	Interactive or Background UL:8 & DL:8kbps PS RAB + UL:3.4 & DL:3.4 SRBs for DCCH	204
8.1.54	Interactive or Background UL:16 & DL:16kbps PS RAB + UL:3.4 & DL:3.4 SRBs for DCCH	204
8.1.55	Interactive or Background UL:32 & DL:32kbps PS RAB + UL:3.4 & DL:3.4 SRBs for DCCH	205
8.1.56	Interactive or Background UL:32 & DL:32kbps PS RAB (20msTTI) + UL:3.4 & DL:3.4 SRBs for DCCH	205
8.1.57	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	205
8.1.58	Conversational / Speech UL:12.2 & DL:12.2kbps CS RAB + Interactive or Background UL:8 & DL:8kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	205
8.1.59	Conversational / Speech UL:12.2 & DL:12.2kbps CS RAB + Interactive or Background UL:32 & DL:32kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	205
8.1.60	Conversational / Speech UL:12.2 & DL:12.2kbps CS RAB + Interactive or Background UL:64 & DL:64kbps PS RAB + Interactive or Background UL:64 & DL:64kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	205
8.1.61	Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:0 & DL:0kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	206
8.1.62	Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:8 & DL:8kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	206
8.1.63	Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:16 & DL:16kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	206
8.1.64	Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:32 & DL:32kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	206
8.1.65	Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:64 & DL:64kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	206
8.1.66	Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:64 & DL:128kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH	207
8.1.67	Conversational / speech / UL:(12.2 7.95 5.9 4.75) kbps DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH....	207
8.1.68	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	207
8.1.69	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	207
8.1.70	Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	207
8.1.71	Interactive or background / UL:64 DL:64 kbps / PS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	208
8.1.72	Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.	208
8.1.72a	Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH – Alternative.....	208

8.1.73	Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	209
8.1.74	Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH (Multiframe).....	210
8.1.75	Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	210
8.1.76	Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	211
8.1.77	Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	213
8.1.78	Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	215
8.1.79	Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	217
8.1.80	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	219
8.1.81	Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	221
8.1.82	Streaming / unknown / UL:8 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	222
8.1.83	Streaming / unknown / UL:8 DL:32 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	225
8.1.84	Streaming / unknown / UL:32 DL:256 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	227
8.1.85	Interactive or background / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	229
8.1.86	Interactive or background / UL:64 DL:8 kbps / PS RAB + Interactive or Background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	231
8.1.87	Interactive or Background / UL:64 DL:128 kbps / PS RAB + Interactive or Background / UL:64 DL:128 kbps / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH.....	231
8.1.88	Interactive or Background / UL:64 DL:384 kbps / PS RAB + Interactive or Background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	232
8.1.89	Interactive or background / UL:128 DL:128 kbps / PS RAB + Interactive or Background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	233
8.1.90	Interactive or background / UL:128 DL:32 kbps / PS RAB + Interactive or Background / UL:128 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	236
8.1.91	Streaming / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	237
8.1.92	Streaming / unknown / UL:16 DL:32 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	238
8.1.93	Interactive or background / UL:16 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	238
8.1.94	Interactive or background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	238
8.1.95	Interactive or background / UL:16 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	238
8.1.96	Conversational / speech / UL:12.2 DL:12.2 kbps + Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	239
8.1.97	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:128 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	241
8.2	Combinations on PDSCH, SCCH, PUSCH and PRACH.....	244
8.2.1	Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	244
8.2.2	Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	244
8.2.3	Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH.....	244
8.2.4	Interactive or background / UL: 384 DL: 2048 kbps / PS RAB + UL: 16.8 DL: 33.6 kbps SRBs for DCCH, CCCH and BCCH + UL: 16.8 DL: 16 kbps SRBs for SHCCH.....	245
8.3	Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH	245

8.3.1	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	245
8.3.2	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	245
8.3.3	Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH.....	246
8.4	Combinations on SCCPCH	246
8.4.1	Stand – alone signalling RB for PCCH	246
8.4.2	Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH	246
8.4.3	Interactive / Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH	246
8.4.4	Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH	246
8.4.5	SRBs for CCCH + SRB for DCCH + SRB for BCCH	246
8.4.6	SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH	247
8.4.7	RB for CTCH + SRB for CCCH + SRB for BCCH	247
8.5	Combinations on PRACH	247
8.5.1	SRB for CCCH + SRB for DCCH	247
8.5.2	Interactive/Background 12.8 kbps PS RAB + SRB for CCCH + SRB for DCCH	247
8.5.3	Interactive/Background 12.8 kbps PS RAB + SRB for CCCH + SRB for DCCH	247
9	Examples of Radio Bearers and Signalling Radio Bearers for 1.28 Mcps TDD.....	247
9.1	Combinations on DPCH.....	247
9.1.1	Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH	247
9.1.1a	Stand-alone UL: 1.7 DL: 1.7 kbps SRBs for DCCH (multiframe)	247
9.1.2	Stand-alone UL: 3.4 DL: 3.4 kbps SRBs for DCCH	248
9.1.3	Stand-aloneUL: 13.6 DL: 13.6 kbps SRBs for DCCH	248
9.1.4	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	248
9.1.4a	Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2 kbps, 7.95, 5.9, 4.75) / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	248
9.1.5	Conversational / speech / UL: 10.2 DL: 10.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	248
9.1.5a	Conversational / speech / UL: (10.2, 6.7, 5.9, 4.75) DL: (10.2, 6.7, 5.9, 4.75) kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	248
9.1.6	Conversational / speech / UL: 7.95 DL: 7.95 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	249
9.1.7	Conversational / speech / UL: 7.4 DL: 7.4 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH....	249
9.1.7a	Conversational / speech / UL: (7.4, 6.7, 5.9, 4.75) DL: (7.4, 6.7, 5.9, 4.75) kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	249
9.1.8	Conversational / speech / UL: 6.7 DL: 6.7 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH....	249
9.1.9	Conversational / speech / UL: 5.9 DL: 5.9 kbps / CS rab + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	249
9.1.10	Conversational / speech / UL: 5.15 DL: 5.15 kbps / CS RAB + UL: 1.7 DL: 1.7 kbps SRBs for DCCH	249
9.1.11	Conversational / speech / UL: 4.75 DL: 4.75 kbps / CS RAB + UL: 1.7 DL: 1.7 kbps SRBs for DCCH	249
9.1.12	Conversational / unknown / UL: 28.8 DL: 28.8 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	250
9.1.13	Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH..	250
9.1.14	Conversational / unknown / UL: 32 DL: 32 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH..	250
9.1.15	Streaming / unknown / UL: 14.4 DL: 14.4 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH....	250
9.1.16	Streaming / unknown / UL: 28.8 DL: 28.8 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH....	250
9.1.17	Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH....	250
9.1.18	Void	251
9.1.19	Void	251
9.1.20	Void	251
9.1.21	Void	251
9.1.22	Void	251
9.1.23	Interactive or background / UL: 32 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	251

9.1.23a	Interactive or background / UL: 8DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	251
9.1.23b	Interactive or background / UL: 16 DL: 16 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH ...	251
9.1.23c	Interactive or background / UL: 32 DL: 32 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH ...	251
9.1.23d	Interactive or background / UL: 32 DL: 32 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH (20 ms TTI).....	252
9.1.24	Void	252
9.1.25	Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH ...	252
9.1.26	Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH ...	252
9.1.27	Interactive or background / UL: 64 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	252
9.1.28	Interactive or background / UL: 128 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	252
9.1.29	Interactive or background / UL: 64 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	252
9.1.30	Interactive or background / UL: 144 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	253
9.1.31	Interactive or background / UL: 64 DL: 256 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	253
9.1.32	Interactive or background / UL: 64 DL: 384 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	253
9.1.33	Interactive or background / UL: 128 DL: 384 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	253
9.1.34	Interactive or background / UL: 384 DL: 384 kbps / PS RAB +UL: 3.4 DL: 3.4 kbps SRBs for DCCH	253
9.1.35	Interactive or background / UL: 64 DL: 2048 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	253
9.1.36	Void	253
9.1.37	Void	254
9.1.38	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 32 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	254
9.1.38a	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 0 DL: 0 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	254
9.1.38b	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	254
9.1.38c	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 32 DL: 32 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	254
9.1.38d	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	254
9.1.38e	Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 0 DL: 0 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	255
9.1.38f	Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	255
9.1.38g	Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 16 DL: 16 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	255
9.1.38h	Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 32 DL: 32 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	255
9.1.38i	Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	255
9.1.38j	Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 64 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	255
9.1.39	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	256
9.1.40	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	256
9.1.41	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 64 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	256
9.1.42	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 64 DL: 256 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	256
9.1.43	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 64 DL: 384 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	256

9.1.44	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 128 DL: 2048 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	257
9.1.45	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	257
9.1.46	Void	257
9.1.47	Void	257
9.1.48	Void	257
9.1.49	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	257
9.1.49a	Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH..	257
9.1.50	Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	258
9.1.51	Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	258
9.1.51a	Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + Interactive or background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH	258
9.1.51b	Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + Interactive or background / UL: 16 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	258
9.1.52	Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + Interactive or background / UL: 64 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	258
9.1.53	Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + Interactive or background / UL: 128 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH.....	258
9.1.54	Void	259
9.1.55	Void	259
9.1.56	Interactive or background / UL: 8 DL: 8 kbps / PS RAB + Interactive or background / UL: 8 DL: 8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.....	259
9.1.57	Interactive or background / UL: 64 DL: 64 kbps / PS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	259
9.1.58	Streaming / Unknown / UL: 16 DL: 64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	259
9.1.59	Reserved for future use	259
9.1.60	Reserved for future use	259
9.1.61	Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH	259
9.2	Combinations on PDSCH, SCCH, PUSCH and PRACH	260
9.2.1	Interactive or background / UL: 64 DL: 256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + UL: 16.8 DL: 33.6 kbps SRBs for DCCH, CCCH and BCCH + UL: 16.8 DL: 16 kbps SRBs for SHCCH	260
9.2.2	Interactive or background / UL: 64 DL: 384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + UL: 16.8 DL: 33.6 kbps SRBs for DCCH, CCCH and BCCH + UL: 16.8 DL: 16 kbps SRBs for SHCCH	260
9.2.3	Interactive or background / UL: 64 DL: 2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + UL: 16.8 DL: 33.6 kbps SRBs for DCCH, CCCH and BCCH + UL: 16.8 DL: 16 kbps SRBs for SHCCH	260
9.3	Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH	260
9.3.1	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + interactive or background / UL: 64 DL: 256 kbps / PS RAB + UL: 16.8 kbps SRBs for CCCH and SHCCH + DL: 33.6 kbps SRBs for CCCH, SHCCH and BCCH	260
9.3.2	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + Interactive or background / UL: 64 DL: 384 kbps / PS RAB + UL: 16.8 kbps SRBs for CCCH and SHCCH + DL: 33.6 kbps SRBs for CCCH, SHCCH and BCCH	260
9.3.3	Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + Interactive or background / UL: 64 DL: 2048 kbps / PS RAB + UL: 16.8 kbps SRBs for CCCH and SHCCH + DL: 33.6 kbps SRBs for CCCH, SHCCH and BCCH	261
9.4	Combinations on SCCPCH	261
9.4.1	Stand – alone signalling RB for PCCH	261
9.4.2	Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH	261
9.4.2a	Interactive / Background 32 kbps PS RAB + Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH.....	261
9.4.2b	SRBs for CCCH + SRB for DCCH + SRB for BCCH	261

9.4.3	Interactive / Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH	261
9.4.3a	SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH	262
9.4.4	RB for CTCH + SRB for CCCH + SRB for BCCH	262
9.5	Combinations on PRACH	262
9.5.1	SRB for CCCH + SRB for DCCH.....	262
9.5.2	Interactive/Background 12.8 kbps PS RAB + SRB for CCCH + SRBs for DCCH.....	262
9.5.3	Interactive/Background 12.8 kbps PS RAB + Interactive/Background 12.8 kbps PS RAB + SRB for CCCH + SRBs for DCCH	262
Annex A:	Service scenarios	263
A.1	Common characteristics of scenarios	264
A.1.1	RTP and RTCP streams	264
A.1.2	Signalling stream	265
A.1.3	Data stream	265
A.2	Scenarios	265
A.2.1	Speech.....	265
A.2.2	Audio	266
A.2.3	Video	266
A.2.4	Text.....	266
A.2.5	Speech and video	266
A.2.6	Audio and video.....	266
A.2.7	Video, audio, or speech with text.....	266
Annex B:	Mapping of service scenarios to Radio Access Bearers	267
B.1	Common requirements	267
B.2	Bearer characteristics	267
B.3	RAB Scenarios	268
Annex C:	Change history	269
History	271	

Foreword

This Technical Report (TR) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document provides a list of examples of RABs and RAB combinations which are supported by UTRA with examples of radio interface mapping for these RABs onto Radio Bearers and Signalling Radio Bearers.

This list of examples describes typical parameters, and should only be understood as possible configurations i.e. any other configuration supported by the Core Specifications and consistent with a given UE capability shall also be supported by this UE.

The present document addresses the FDD mode as well as the TDD mode.

This report is a release independent report. This means that the latest release applicable to 3GPP is the reference that this TR is defined upon, and contains information on all previous releases. Actual release where a given example applies is indicated in the relevant section.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 34.108: "Common Test Environments for User Equipment (UE) Conformance Testing"
- [2] 3GPP TS 23.107: "Quality of Service (QoS) concept and architecture".
- [3] 3GPP TS 25.212: "Multiplexing and channel coding (FDD)".
- [4] 3GPP TS 25.322: "RLC Protocol Specification".
- [5] 3GPP TS 25.323: "PDCP Protocol Specification".
- [6] 3GPP TS 25.331: "Radio Resource Control (RRC); protocol specification".
- [7] IETF RFC 2507: "IP Header Compression".
- [8] 3GPP TS 25.306: "UE Radio Access Capabilities"
- [9] IETF RFC 3095: "RObust Header Compression (ROHC): Framework and four profiles: RTP, UDP, ESP, and uncompressed".
- [10] 3GPP TS 26.236: "Packet switched conversational multimedia applications; Transport protocols"
- [11] 3GPP TS 26.234: "Transparent end-to-end packet switched streaming service (PSS); Protocols and codecs"
- [12] IETF RFC1889: "RTP: A Transport Protocol for Real-Time Applications"
- [13] IETF RFC3267: "Real-Time Transport Protocol (RTP) Payload Format and File Storage Format for the Adaptive Multi-Rate (AMR) and Adaptive Multi-Rate Wideband (AMR-WB) Audio Codecs"
- [14] 3GPP TR 26.937: "Transparent end-to-end packet switched streaming service (PSS); RTP usage model"

- [15] 3GPP TS 26.235: "Packet switched conversational multimedia applications; Default codecs"
- [16] IETF RFC2793: "RTP Payload for Text Conversation"

3 Abbreviations and Terms

3.1 Abbreviations

For the purposes of the present document, the abbreviations contained in TR 21.905 apply, as well as the following:

DL	Downlink
HC	Header Compression
IETF	Internet Engineering Task Force
I/B	Interactive / Background
IP	Internet Protocol
kbps	kilo-bits per second
RAB	Radio Access Bearer
RB	Radio Bearer
RNC	Radio Network Controller
ROHC	Robust Header Compression
RT	Real-time
RTP	Real-time Transport Protocol
RTCP	Real-time Transport Control Protocol
RTSP	Real-time Streaming Protocol
SIP	Session Initiation Protocol
SRB	Signalling Radio Bearer
TCP	Transmission Control Protocol
UDP	User Datagram Protocol
UL	Uplink

3.2 Terms

Bearer	Common term used to refer to RAB, RB, and/or SRB, when there is no need to distinguish between these terms.
Radio Access Bearer	Bearer between UE and CN.
Radio Bearer	User plane bearer on RAN level between RNC/NodeB and UE.
Signalling Radio Bearer	RAN level bearer for RRC and NAS signalling between RNC and UE. User plane signalling bearer (e.g., the bearer for SIP signalling) is not SRB, but RB.

NOTE: In [1] also the RAN level bearers are called as RABs. In order to maintain consistency with [1], the term RAB is partly used instead of RB also in this document in similar contexts as in [1].

For the Radio Access Bearers mapped on HS-PDSCH in the downlink, or E-PDCH in the uplink, the terminology was enhanced so that the above mentioned terms are used correctly in the document except for subclauses 7.1, 7.2, 7.3 and the complete clauses 8 and 9.

4 QoS Architecture and RAB attributes

From a user point-of-view services are considered end-to-end, this means from a Terminal Equipment (TE) to another TE. An End-to-End Service may have a certain Quality of Service (QoS) which is provided for the user through the different networks. In UMTS, it is the UMTS Bearer Service that provides the requested QoS through the use of different QoS classes as defined in [2].

The UMTS Bearer Service consists of two parts, the Radio Access Bearer (RAB) Service and the Core Network Bearer Service. The Radio Access Bearer Service is realised by a Radio Bearer (RB) Service and an Iu-Bearer Service. The relationship between the services is illustrated in figure 4.1.

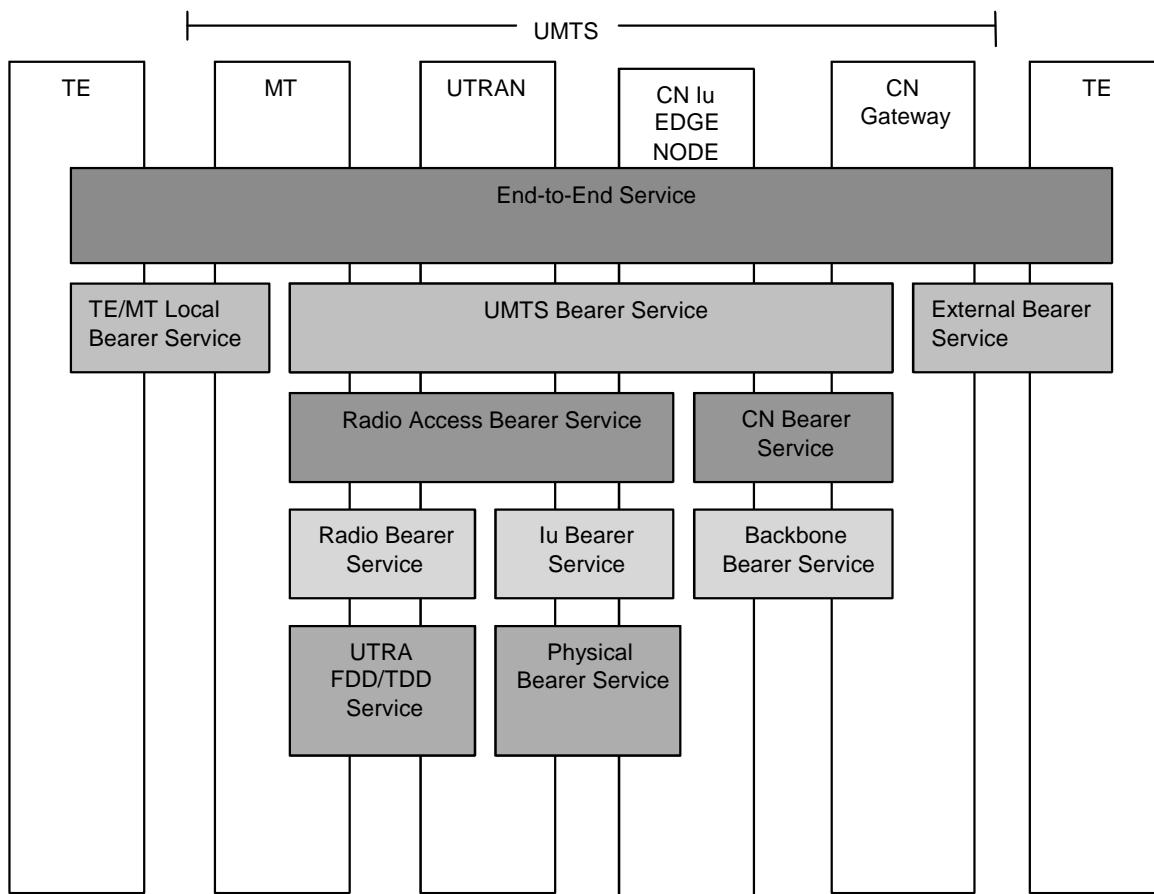


Figure 4.1: UMTS QoS Architecture

The Radio Access Bearer (RAB) Service is characterised by a number of attributes such as Traffic class, Maximum bit rate, Guaranteed bit rate, SDU error ratio, Residual BER, Transfer Delay etc. As a first approach the four following attributes have been considered to come up with the parameter settings in clause 7 for FDD mode and 8 for TDD mode:

- Traffic class;
- SSD;
- Maximum bit rate;
- Residual BER.

The Traffic classes are explained in table 4-1. The Maximum bit rate has been considered at RLC layer and Physical Layer for the acknowledged and unacknowledged modes respectively. The Residual BER is understood as BER at RLC layer and Transport BLER for the acknowledged and unacknowledged modes respectively.

Table 4-1: Traffic classes

Traffic class	Conversational class conversational RT	Streaming class streaming RT	Interactive class Interactive best effort	Background Background best effort
Fundamental characteristics	- Preserve time relation (variation) between information entities of the stream Conversational pattern (stringent and low delay)	- Preserve time relation (variation) between information entities of the stream (i.e. some but constant delay)	Request response pattern Preserve payload content	Destination is not expecting the data within a certain time Preserve payload content
Example of the application	- speech, video, ...	- facsimile (NT) - streaming audio and video	- Web browsing	- background download of emails

5 List of RABs and SRBs

The following tables provide examples of Radio Access Bearers (RABs) which can be realised by various Radio Bearers (RBs) as defined in clauses 7 and 8. The data rate given for each RAB is the maximum data rate that can be supported by that RAB in case of non real-time RABs. For real-time RABs the given datarate are the guaranteed and maximum bit rates.

The mapping between Radio Access Bearer and Radio Bearer is internal to UTRAN Radio Resource Management and not standardised. Based on certain Radio Access Bearer attributes, resource utilisation or radio conditions, different Radio Bearers can fulfill the Radio Access Bearer requirements.

Table 5.1: Void

5.1 Interactive or background class Radio Access Bearers (PS domain)

The following table lists typical maximum RAB data rates independently for uplink and downlink. These maximum bit rates are part of the "RAB parameters" received by the RNC in the RANAP: RAB ASSIGNMENT messages and must be mandatorily provided from the CN (SGSN) to the UTRAN (RNC). Any combination of the listed example data rates is possible.

Table 5.1-1: Interactive or Background / UL: [m] kbps DL: [m] kbps / PS RAB

Max UL bitrate [m] kbps	Max DL bitrate [m] kbps
0	0
8	8
16	16
32	32
64	64
128	128
144	144
256	256
384	384
512	512
1024	1024
2048	2048
3072	3072
4096	4096
	6144
	7168
	8192
	10240
	12288
	14336

5.2 Streaming class Radio Access Bearers

5.2.1 CS domain

The following table lists typical guaranteed and maximum RAB data rates independently for uplink and downlink which can be used by CS streaming applications for example. These guaranteed and maximum bitrates are part of the "RAB parameters" received by the RNC in the RANAP: RAB ASSIGNMENT messages and must be mandatorily provided from the CN (SGSN) to the UTRAN (RNC) for the streaming traffic class. Any combination of the listed example datarates is possible. It should be noted that the requested maximum bit rate should always be equal to the requested guaranteed bit rate for a given connection.

Table 5.2.1-1: Streaming / unknown / UL: [g] [m] kbps DL: [g] [m] kbps / CS RAB

Guaranteed UL bitrate [g] kbps for streaming	Max UL bitrate [m] kbps for streaming	Guaranteed DL bitrate [g] kbps for streaming	Max DL bitrate [m] kbps for streaming
0	0	0	0
14.4	14.4	14.4	14.4
28.8	28.8	28.8	28.8
57.6	57.6	57.6	57.6
64	64	64	64

NOTE: The requested max. bit rate shall always be equal to the requested guaranteed bit rate.

5.2.2 PS domain

The following table lists typical guaranteed and maximum RAB data rates independently for uplink and downlink which can be used by PS streaming applications for example. These guaranteed and maximum bit rates are part of the "RAB parameters" received by the RNC in the RANAP: RAB ASSIGNMENT messages and must be mandatorily provided from the CN (SGSN) to the UTRAN (RNC) for the streaming traffic class. Any combination of the listed example data rates is possible. It should be noted that the requested maximum bit rate should always be equal or higher than the requested guaranteed bit rate for a given connection.

Table 5.2.2-1: Streaming / unknown / UL: [g] [m] kbps DL: [g] [m] kbps / PS RAB

Guaranteed UL bitrate [g] kbps for streaming	Max UL bitrate [m] kbps for streaming	Guaranteed DL bitrate [g] kbps for streaming	Max DL bitrate [m] kbps for streaming
0	0	0	0
8	8	8	8
16	16	16	16
32	32	32	32
64	64	64	64
128	128	128	128
256	256	256	256
384	384	384	384
		512	512
		1024	1024
		2048	2048
		3072	3072
		4096	4096
		6144	6144
		7168	7168
		8192	8192
		10240	10240
		12288	12288
		14336	14336

NOTE: The requested maximum bit rate shall always be equal or higher than the requested guaranteed bit rate.

5.3 Conversational class Radio Access Bearers

5.3.1 CS domain

Table 5.3.1-1: Conversational / speech / UL: [Y] kbps DL: [Y] kbps / CS RAB

UL [Y] kbps for CS voice	DL [Y] kbps for CS voice
4.75	4.75
5.15	5.15
5.9	5.9
6.7	6.7
7.4	7.4
7.95	7.95
10.2	10.2
12.2	12.2

NOTE: It is understood that for speech service the AMR mode may be operated asymmetrically for the uplink and downlink. Multirate AMR can apply a set of UL and DL datarate out of the entire set of NB-AMR rates, where the set is the same for UL and DL, while the RAB configuration is always set up symmetrically (e.g. same rates in the UL and DL).

Table 5.3.1-2: Conversational / speech / UL: [Y] kbps DL: [Y] kbps / CS RAB

UL [Y] kbps for CS voice (WB-AMR)	DL [Y] kbps for CS voice (WB-AMR)
6.60	6.60
8.85	8.85
12.65	12.65
14.25	14.25
15.85	15.85
18.25	18.25
19.25	19.25
23.05	23.05
23.85	23.85

NOTE: It is understood that for speech service the AMR mode may be operated asymmetrically for the uplink and downlink. Multirate AMR can apply a set of UL and DL datarate out of the entire set of WB-AMR rates, where the set is the same for UL and DL, while the RAB configuration is always set up symmetrically (e.g. same rates in the UL and DL).

Table 5.3.1-3: Conversational / unknown / UL: [Y] kbps DL: [Y] kbps / CS RAB

UL [Y] kbps for CS video or data	DL [Y] kbps for CS video or data
28.8	28.8
32	32
64	64
NOTE: The data rates selected must be symmetrically for the uplink and downlink.	

5.3.2 PS domain

Table 5.3.2-1: Conversational / speech / UL: [Y] kbps DL: [Y] kbps / PS RAB

UL [Y] kbps for PS voice	DL [Y] kbps for PS voice
16.8	16.8
17.6	17.6
38.8	38.8
39.2	39.2
39.6	39.6
40	40
42.8	42.8

Table 5.3.2-2: Conversational / unknown / UL: [Y] kbps DL: [Y] kbps / PS RAB

UL [Y] kbps for PS voice	DL [Y] kbps for PS voice
8	8
16	16

5.4 Signalling Radio Bearers (Control Plane)

Table 5.4-1 provides examples of Signalling Radio Bearers (SRBs) which can use configurations as defined in clauses 7, 8 and 9.

Table 5.4-1: Signalling Radio Bearers (SRBs)

#	Maximum rate, kbps	Logical channel	PhyCh onto which SRBs are mapped
1	UL:1.7 DL:1.7	DCCH	DPCH
2	UL:3.4 DL:3.4	DCCH	DPCH
3	UL:13.6 DL:13.6	DCCH	DPCH
4	DL:27.2 (alt. 40.8)	DCCH	SCCPCH
5	UL:16.6	CCCH	PRACH
6	DL:30.4 (alt. 45.6)	CCCH	SCCPCH
7	DL:33.2 (alt. 49.8)	BCCH:	SCCPCH
8	DL:24 (alt. 6.4)	PCCCH	SCCPCH
9	UL:16.8 (TDD)	SHCCCH	PRACH
10	UL:16.8 (TDD)	SHCCCH	PRACH or PUSCH
11	DL:16 (TDD)	SHCCCH	SCCPCH
12	DL:16 (TDD)	SHCCCH	SCCPCH or PUSCH
13	DL: 0.15	DCCH	DPCH
14	UL:27.2 DL:27.2	DCCH	DPCH

6 Combinations of RABs

Any combination of the listed RABs in clause 5 is possible. Based on the selected RAB or RAB combination, the Radio Resource Management (RRM) inside the RNC selects appropriate Radio Bearers (RB) from clauses 7, 8 or 9.

For a valid configuration the Signalling Radio Bearer listed in subclause 5.4. is existing alone or it is combined with one or multiple RABs of subclause 5.1, 5.2, 5.3. Configuration limitations are defined in clause 5.

7 Examples of Radio Bearers and Signalling Radio Bearers for FDD

7.1 Combinations on DPCH

7.1.1 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.2.4.1.1 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps with support of DL SF = 512.

This is supported in Release '99.

7.1.2 Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.3 Stand-alone UL:13.6 DL:13.6 kbps SRBs for DCCH

See subclause 6.10.2.4.1.3 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.3a Stand-alone UL:27.2 DL:27.2 kbps SRBs for DCCH

7.1.3a.1 Uplink

7.1.3a.1.1 Transport channel parameters

7.1.3a.1.1.1 Transport channel parameters for UL:27.2 kbps SRBs for DCCH

Higher layer	RAB/signalling RB	SRB#1	SRB#2	SRB#3	SRB#4
	User of RadioBearer	RRC	RRC	NAS_DT High prio	NAS_DT Low prio
RLC	Logical channel type	DCCCH	DCCCH	DCCCH	DCCCH
	RLC mode	UM	AM	AM	AM
	Payload sizes, bit	136	128	128	128
	Max data rate, bps	13600	12800	12800	12800
	AMD/UMD PDU header, bit	8	16	16	16
MAC	MAC header, bit	4	4	4	4
	MAC multiplexing	4 logical channel multiplexing			
Layer 1	TrCH type	DCH			
	TB sizes, bit	148 (alt 0, 148)			
	TFS	TF0, bits	0x148 (alt 1x0)		

	TF1, bits	1x148
	TF2, bits	2x148
TTI, ms		10
Coding type		CC 1/3
CRC, bit		16
Max number of bits/TTI before rate matching		1008
Uplink: Max number of bits/radio frame before rate matching		1008
RM attribute		155 to 185

7.1.3a.1.1.2 TFCS

TFCS size	3
TFCS	SRBs for DCCH = TF0, TF1, TF2

7.1.3a.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1

7.1.3a.2 Downlink

7.1.3a.2.1 Transport channel parameters

7.1.3a.2.1.1 Transport channel parameters for DL:27.2 kbps SRBs for DCCH

Higher layer	RAB/signalling RB	SRB#1	SRB#2	SRB#3	SRB#4
	User of RadioBearer	RRC	RRC	NAS_DT High prio	NAS_DT Low prio
RLC	Logical channel type	DCCCH	DCCCH	DCCCH	DCCCH
	RLC mode	UM	AM	AM	AM
	Payload sizes, bit	136	128	128	128
	Max data rate, bps	13600	12800	12800	12800
	AMD/UMD PDU header, bit	8	16	16	16
MAC	MAC header, bit	4	4	4	4
	MAC multiplexing	4 logical channel multiplexing			
Layer 1	TrCH type	DCH			
	TB sizes, bit	148 (alt 0, 148) (note)			
	TF0, bits	0x148 (alt 1x0) (note)			
	TF1, bits	1x148			
	TF2, bits	2x148			
	TTI, ms	10			
	Coding type	CC 1/3			
	CRC, bit	16			
	Max number of bits/TTI before rate matching	1008			
	RM attribute	155 to 230			

NOTE: alternative parameters enable the measurement "transport channel BLER" in the UE.

7.1.3a.2.1.2 TFCS

TFCS size	3
TFCS	SRBs for DCCH = TF0, TF1, TF2

7.1.3a.2.2 Physical channel parameters

DPCH Downlink	DTX position	Fixed	
	Spreading factor	64	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

The minimum UE classes supporting this combination are UL: 12 kbps plus support for 'Maximum number of DPDCH bits transmitted per 10 ms' = 1200, DL: 12 kbps.

This is supported in Release '99.

7.1.4 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.4 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.5 Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.4a of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.6 Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.5 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.7 Conversational / speech / UL:(10.2, 6.7, 5.9, 4.75) DL:(10.2, 6.7, 5.9, 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.5a of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.8 Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.6 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.9 Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.7 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.10 Conversational / speech / UL:(7.4, 6.7, 5.9, 4.75) DL:(7.4, 6.7, 5.9, 4.75) kbps / CS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.7a of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.11 Conversational / speech / UL:6.7 DL:6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.8 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.12 Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.9 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.12a Conversational / speech / UL:(5.9, 4.75) DL:(5.9, 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.12a.1 Uplink

7.1.12a.1.1 Transport channel parameters

7.1.12a.1.1.1 Transport channel parameters for Conversational / speech / UL:(5.9, 4.75) kbps / CS RAB

Higher layer	RAB/Signalling RB	RAB subflow #1	RAB subflow #2	RAB subflow #3
RLC	Logical channel type	DTCH		
	RLC mode	TM	TM 53, 63	TM 60
	Payload sizes, bit	39, 42, 55 (alt. 0, 39, 42, 55)		

	Max data rate, bps	5900		
	TrD PDU header, bit	0		
MAC	MAC header, bit	0		
	MAC multiplexing	N/A		
Layer 1	TrCH type	DCH	DCH	DCH
	TB sizes, bit	39, 42, 55 (alt. 0, 39, 42 55)	53, 63	60
	TFS	TF0, bits TF1, bits TF2, bits TF3, bits	0x55 (alt. 1x0) (note) 1x39 1x42 1x55	0x63 1x53 1x63 N/A
	TTI, ms	20	20	20
	Coding type	CC 1/3	CC 1/3	CC 1/2
	CRC, bit	12	N/A	N/A
	Max number of bits/TTI after channel coding	225	213	0
	Uplink: Max number of bits/radio frame before rate matching	113	107	0
	RM attribute	180-220	170-210	215-256
	NOTE:	In case of using this alternative, CRC parity bits are to be attached to RAB subflow#1 any time since number of TrBlks are 1 even if there is no data on RAB subflow#1 (see subclause 4.2.1.1 in TS 25.212).		

7.1.12a.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.12a.1.1.3 TFCS

TFCS size	8
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH)= (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF2, TF1, TF0, TF0), (TF3, TF2, TF0, TF0) (TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF1), (TF2, TF1, TF0, TF1), (TF3, TF2, TF0, TF1)

7.1.12a.1.2 Physical channel parameters

See subclause 6.10.2.4.1.9.1.2 of [1].

7.1.12a.2 Downlink

7.1.12a.2.1 Transport channel parameters

7.1.12a.2.1.1 Transport channel parameters for Conversational / speech / DL:(5.9, 4.75) kbps / CS RAB

Higher Layer	RAB/Signalling RB	RAB subflow #1	RAB subflow #2	RAB subflow #3
RLC	Logical channel type	DTCH		
	RLC mode	TM	TM	TM
	Payload sizes, bit	0, 39, 42, 55	53, 63	60
	Max data rate, bps	5900		
	TrD PDU header, bit	0		
MAC	MAC header, bit	0		
	MAC multiplexing	N/A		
Layer 1	TrCH type	DCH	DCH	DCH
	TB sizes, bit	0, 39, 42, 55	53, 63	60
	TFS (note 1)	TF0, bits	1x0 (note 2)	0x63
		TF1, bits	1x39	1x53
		TF2, bits	1x42	1x63

TF3, bits	1x55	N/A	N/A
TTI, ms	20	20	20
Coding type	CC 1/3	CC 1/3	CC 1/2
CRC, bit	12	N/A	0
Max number of bits/TTI after channel coding	225	213	0
RM attribute	180-220	170-210	215-256

NOTE 1: The TrCH corresponding to RAB subflow #1 should be used as the guiding TrCH, (see subclause 4.3 in TS 25.212).
 NOTE 2: CRC parity bits are to be attached to RAB subflow#1 any time since number of TrBlks are 1 even if there is no data on RAB subflow#1 (see subclause 4.2.1.1 in TS 25.212).

7.1.12a.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.12a.2.1.3 TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH)= (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF2, TF1, TF0, TF0), (TF3, TF2, TF0, TF0) (TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF1), (TF2, TF1, TF0, TF1), (TF3, TF2, TF0, TF1)

7.1.12a.2.2 Physical channel parameters

See subclause 6.10.2.4.1.9.2.2 of [1].

7.1.12b Conversational / speech / UL:5.9 DL:5.9 (SF=128) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.12b.1 Uplink

See subclause 6.10.2.4.1.9.1 of [1].

7.1.12b.2 Downlink

7.1.12b.2.1 Transport channel parameters

See subclause 6.10.2.4.1.9.2.1 of [1].

7.1.12b.2.2 Physical channel parameters

DPCH Downlink	DTX position	Fixed	
	Spreading factor	128	
	DPCCH	Number of TFCI bits/slot	0
		Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot	34
		Number of data bits/frame	510

7.1.13 Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.2.4.1.10 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.14 Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.2.4.1.11 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.15 Conversational / unknown / UL:28.8/DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.12 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.16 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.13 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.17 Conversational / unknown / UL:32 DL:32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.14 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.18 Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.15 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps with support of turbo encoding and 'Maximum sum of number of bits of all transport blocks being transmitted at an arbitrary time instant' = 1280, DL: 32 kbps.

This is supported in Release '99.

7.1.19 Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.16 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.20 Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.17 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.21 Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.21.1 Uplink

7.1.21.1.1 Transport channel parameters

7.1.21.1.1.1 Transport channel parameters for Streaming / unknown / UL:0 kbps / CS RAB

N/A

7.1.21.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

6.10.2.4.1.18.1.1.3 TFCS

See subclause 6.10.2.4.1.2.1.1.2 of [1].

7.1.21.1.2 Physical channel parameters

See subclause 6.10.2.4.1.2.1.2 of [1].

7.1.21.2 Downlink

7.1.21.2.1 Transport channel parameters

7.1.21.2.1.1 Transport channel parameters for Streaming / unknown / DL:64 kbps / CS RAB

Higher layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		TM
	Payload sizes, bit		320
	Max data rate, bps		64000
	TrD PDU header, bit		0
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		320
	TFS	TF0, bits	0x320 (alt. 1x0) (note)
		TF1, bits	1x320
		TF2, bits	2x320
		TF3, bits	4x320
		TF4, bits	8x320
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		8076
	RM attribute		125-165
NOTE: Alternative 1x0 is used to have CRC present in all transport formats.			

7.1.21.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.21.2.1.3 TFCS

TFCS size	10
TFCS	(64 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

7.1.21.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 64 kbps plus support for 'Maximum total number of transport blocks received within TTIs that end at the same time' = 16.

This is supported in Release '99.

7.1.22 Streaming / unknown / UL:64 DL:0 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.22.1 Uplink

7.1.22.1.1 Transport channel parameters

7.1.22.1.1.1 Transport channel parameters for Streaming / unknown / UL:64 kbps / CS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	TM	
	Payload sizes, bit	320	
	Max data rate, bps	64000	
	TrD PDU header, bit	0	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	320	
	TFS	TF0, bits	0x320
		TF1, bits	1x320
		TF2, bits	2x320
		TF3, bits	4x320
		TF4, bits	8x320
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8076	
	Uplink: Max number of bits/radio frame before rate matching	2019	
	RM attribute	125-165	

7.1.22.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.22.1.1.3 TFCS

TFCS size	10
TFCS	(64 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

7.1.22.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1

7.1.22.2 Downlink

7.1.22.2.1 Transport channel parameters

7.1.22.2.1.1 Transport channel parameters for Streaming / unknown / DL:0 kbps / CS RAB

N/A.

7.1.22.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.22.2.1.3 TFCS

See subclause 6.10.2.4.1.2.2.1.2 of [1].

7.1.22.2.2 Physical channel parameters

See subclause 6.10.2.4.1.2.2.2 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 12 kbps.

This is supported in Release '99.

7.1.23 Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.23.1 Uplink

See subclause 6.10.2.4.1.23.1 of [1].

7.1.23.2 Downlink

7.1.23.2.1 Transport channel parameters

See subclause 6.10.2.4.1.23.2.1 of [1].

7.1.23.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed	
	Spreading factor		128	
	DPCCH	Number of TFCI bits/slot		2
		Number of TPC bits/slot		2
		Number of Pilot bits/slot		4
	DPDCH	Number of data bits/slot		32
		Number of data bits/frame		480

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps. For the alternative UL configuration, the minimum UE class supporting this combination is UL: 32 kbps.

This is supported in Release '99.

7.1.24 Interactive or background / UL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.24.1 Uplink

See subclause 6.10.2.4.1.23a.1 of [1].

7.1.24.2 Downlink

7.1.24.2.1 Transport channel parameters

See subclause 6.10.2.4.1.23a.2.1 of [1].

7.1.24.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	128	
	DPCCH	Number of TFCI bits/slot	2
		Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot	32
		Number of data bits/frame	480

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release '99.

7.1.25 Interactive or background / UL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.25.1 Uplink

See subclause 6.10.2.4.1.23b.1 of [1]

7.1.25.2 Downlink

7.1.25.2.1 Transport channel parameters

See subclause 6.10.2.4.1.23b.2.1 of [1].

7.1.25.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	128	
	DPCCH	Number of TFCI bits/slot	2
		Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot	32
		Number of data bits/frame	480

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.26 Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.26.1 Uplink

See subclause 6.10.2.4.1.23c.1 of [1].

7.1.26.2 Downlink

7.1.26.2.1 Transport channel parameters

See subclause 6.10.2.4.1.23c.2.1 of [1].

7.1.26.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.27 Interactive or background / UL:32 DL:32 kbps / PS RAB (20 ms TTI)+ UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.27.1 Uplink

See subclause 6.10.2.4.1.23d.1 of [1].

7.1.27.2 Downlink

7.1.27.2.1 Transport channel parameters

7.1.27.2.1.1 Transport channel parameters for Interactive or background / DL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320 alt.640
	Max data rate, bps	32000
	AMD PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	336 alt. 656
	TFS	0x336 alt. 0x656
		1x336 alt. 1x656
		2x336 alt. none
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2124 alt. 2028
	RM attribute	135-175 alt. tbd

7.1.27.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.27.2.1.3 TFCS

TFCS size	6 alt. 4
TFCS	(32 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1) alt. (32 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF0,TF1), (TF1,TF1)

7.1.27.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	64
DPCCH	Number of TFCI bits/slot	8
	Number of TPC bits/slot	4
	Number of Pilot bits/slot	8
DPDCH	Number of data bits/slot	60
	Number of data bits/frame	900

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99, the alt. is supported in Release 5.

7.1.28 Interactive or background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.28.1 Uplink

7.1.28.1.1 Transport channel parameters

7.1.28.1.1.1 Transport channel parameters for Interactive or background / UL:64 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	320	
	Max data rate, bps	64000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	336	
	TFS	TF0, bits	0x336
		TF1, bits	1x336
		TF2, bits	2x336
		TF3, bits	3x336
		TF4, bits	4x336
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	4236	
	Uplink: Max number of bits/radio frame before rate matching	2118	
	RM attribute	130-170	

7.1.28.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.28.1.1.3 TFCS

TFCS size	10
TFCS	(64 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

7.1.28.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.96

7.1.28.2 Downlink

7.1.28.2.1 Transport channel parameters

See subclause 6.10.2.4.1.23.2.1 of [1].

7.1.28.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	128	
	DPCCH	Number of TFCI bits/slot	2
		Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot	32
		Number of data bits/frame	480

The minimum UE classes supporting this combination are UL: 64kbps, DL: 12 plus support for turbo decoding and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 640. The minimum UE class to support the alternative DL configuration is DL: 12kbps.

This is supported in Release '99.

7.1.29 Interactive or background / UL:32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.29.1 Uplink

See subclause 6.10.2.4.1.25.1 of [1].

7.1.29.2 Downlink

7.1.29.2.1 Transport channel parameters

See subclause 6.10.2.4.1.25.2.1 of [1].

7.1.29.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	32	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps. The minimum UE class to support the alternative UL configuration (10ms TTI) is UL: 32kbps.

This is supported in Release '99.

7.1.30 Interactive or background / UL:64 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.30.1 Uplink

See subclause 6.10.2.4.1.26.1 of [1].

7.1.30.2 Downlink

See subclause 7.1.29.2.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.31 Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.31.1 Uplink

See subclause 6.10.2.4.1.27.1 of [1].

7.1.31.2 Downlink

7.1.31.2.1 Transport channel parameters

See subclause 6.10.2.4.1.27.2.1 of [1].

7.1.31.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		16
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.32 Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.32.1 Uplink

See subclause 6.10.2.4.1.28.1 of [1].

7.1.32.2 Downlink

See subclause 7.1.31.2.

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 128kbps.

This is supported in Release '99.

7.1.33 Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

7.1.33.1 Uplink

See subclause 6.10.2.4.1.29.1 of [1].

7.1.33.2 Downlink

7.1.33.2.1 Transport channel parameters

See subclause 6.10.2.4.1.29.2.1 of [1].

7.1.33.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		16
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.34 Interactive or background / UL:144 DL:144 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

7.1.34.1 Uplink

See subclause 6.10.2.4.1.30.1 of [1].

7.1.34.2 Downlink

See subclause 7.1.33.2.

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 128kbps.

This is supported in Release '99.

7.1.35 Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

7.1.35.1 On DPCH

7.1.35.1.1 Uplink

See subclause 6.10.2.4.1.31.1 of [1].

7.1.35.1.2 Downlink

7.1.35.1.2.1 Transport channel parameters

See subclause 6.10.2.4.1.31.2.1 of [1].

7.1.35.1.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	8	
	Number od DPDCH	1	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	608
		Number of data bits/frame	9120

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps plus support for 'Maximum number of physical channel bits received in any 10ms interval' = 9600. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 384kbps.

This is supported in Release '99.

7.1.35.2 On PDSCH and DPCH

7.1.35.2.1 Uplink

See subclause 6.10.2.4.1.24.1 of [1].

7.1.35.2.2 Downlink

7.1.35.2.2.1 Transport channel parameters

7.1.35.2.2.1.1 Transport channel parameters for Interactive or background / DL:256 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320
	Max data rate, bps	384000
	AMD PDU header, bit	16
MAC	MAC header, bit	18
	MAC multiplexing	Logical channel multiplexing on a frame by frame basis
Layer 1	TrCH type	DSCH
	TB sizes, bit	354
	TFS	0x354
		1x354
		2x354
		4 x354
		8 x354
	TF5, bits	N/A (alt. 12x354)
	TF6, bits	N/A (alt. 16x354)
	TTI, ms	10(alt. 20)
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	8892(alt. 17784)
	RM attribute	135-175

7.1.35.2.2.1.2 Transport channel parameters for DL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.35.2.2.1.3 TFCS

PDSCH	TFCS size	5 (alt.7)
	TFCS	256 kbps RAB =TF0, TF1, TF2, TF3, TF4 (alt. TF0, TF1, TF2, TF3, TF4, TF5, TF6)
DPCH Downlink associated with PDSCH	TFCS size	2
	TFCS	SRBs for DCCH = TF0, TF1

7.1.35.2.2.2 Physical channel parameters

PDSCH	RAB or SRB, TrCh	Interactive or background / 256 kbps / PS RAB, DSCH
	DTX position	N/A (SingleTrCH)
	Minimum spreading factor	8
DPCH Downlink associated with PDSCH	RAB or SRB, TrCh	3.4 kbps SRB for DCCH, DCH
	DTX position	N/A (SingleTrCH)
	Spreading factor	256
	DPCCH	Number of TFCI bits/slot
		2
		Number of TPC bits/slot
	DPDCH	Number of Pilot bits/slot
		4
		Number of data bits/slot
		12
		Number of data bits/frame
		180

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps plus support for PDSCH plus support for 'Maximum number of physical channel bits received in any 10ms interval' = 9600. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 384kbps plus support for PDSCH.

This is supported in Release '99.

7.1.36 Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

7.1.36.1 On DPCH

7.1.36.1.1 Uplink

See subclause 6.10.2.4.1.32.1 of [1].

7.1.36.1.2 Downlink

7.1.36.1.2.1 Transport channel parameters

See subclause 6.10.2.4.1.32.2.1 of [1].

7.1.36.1.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	8
	Number of DPDCH	1
	DPCCH	8
		Number of TPC bits/slot
		8
	DPDCH	Number of Pilot bits/slot
		16
		Number of data bits/slot
		608
		Number of data bits/frame
		9120

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.36.2 On PDSCH and DPCH

See subclause 6.10.2.4.2.2 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps plus support for PDSCH. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.37 Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.37.1 Uplink

See subclause 6.10.2.4.1.33.1 of [1].

7.1.37.2 Downlink

See subclause 7.1.36.1.2.

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 384kbps. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.38 Interactive or background / UL:384 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.38.1 Uplink

See subclause 6.10.2.4.1.34.1 of [1].

7.1.38.2 Downlink

See subclause 7.1.36.1.2.

The minimum UE classes supporting this combination are UL: 384kbps, DL: 384kbps. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.39 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.39.1 On DPCH

7.1.39.1.1 Uplink

See subclause 6.10.2.4.1.35.1 of [1].

7.1.39.1.2 Downlink

7.1.39.1.2.1 Transport channel parameters

See subclause 6.10.2.4.1.35.2.1 of [1].

7.1.39.1.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	4
	Number of DPCH	3
DPCCH	Number of TFCI bits/slot	8
	Number of TPC bits/slot	8
	Number of Pilot bits/slot	16
DPDCH	Number of data bits/slot	1248
	Number of data bits/frame	18720

The minimum UE classes supporting this combination are UL: 64kbps, DL: 2048kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.39.2 On PDSCH and DPCH

See subclause 6.10.2.4.2.3 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 2048kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.40 Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.40.1 Uplink

See subclause 6.10.2.4.1.28.1 of [1].

7.1.40.2 Downlink

See subclause 7.1.39.1.2.

The minimum UE classes supporting this combination are UL: 128 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 2048 kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.41 Interactive or background / UL:384 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.41.1 Uplink

See subclause 6.10.2.4.1.34.1 of [1].

7.1.41.2 Downlink

See subclause 7.1.39.1.2.

The minimum UE classes supporting this combination are UL: 384 kbps, DL: 2048 kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.42 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.42.1 Uplink

See subclause 6.10.2.4.1.38.1 of [1].

7.1.42.2 Downlink

7.1.42.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38.2.1 of [1].

7.1.42.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.43 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38a of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 12 kbps plus support for 'Maximum number of simultaneous transport channels' = 5.

This is supported in Release '99.

7.1.44 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.44.1 Uplink

See subclause 6.10.2.4.1.38b.1 of [1].

7.1.44.2 Downlink

7.1.44.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38b.2.1 of [1].

7.1.44.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	64
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
		4
		Number of Pilot bits/slot
	DPDCH	Number of data bits/slot
		60
		Number of data bits/frame
		900

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.45 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.45.1 Uplink

See subclause 6.10.2.4.1.38c.1 of [1].

7.1.45.2 Downlink

7.1.45.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38c.2.1 of [1].

7.1.45.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	32
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
		4
		Number of Pilot bits/slot
	DPDCH	Number of data bits/slot
		140
		Number of data bits/frame
		2100

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

**7.1.45a Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:32 DL:32 kbps / PS RAB (20ms TTI)+
UL:3.4 DL:3.4 kbps SRBs for DCCH**

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.45a.1 Uplink

7.1.45a.1.1 Transport channel parameters

7.1.45a.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1]

7.1.45a.1.1.2 Transport channel parameters for Interactive or background / UL:32 kbps / PS RAB

See subclause 6.10.2.4.1.23d.1.1.1 of [1]

7.1.45a.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.45a.1.1.4 TFCS

TFCS size	18
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 32 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF1,TF2,TF0), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF1,TF2,TF1)

7.1.45a.1.2 Physical channel parameters

DPCN Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1.0

7.1.45a.2 Downlink

7.1.45a.2.1 Transport channel parameters

7.1.45a.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1]

7.1.45a.2.1.2 Transport channel parameters for Interactive or background / DL:32 kbps / PS RAB

See subclause 6.10.2.4.1.23d.2.1.1 of [1]

7.1.45a.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.45a.2.1.4 TFCS

TFCS size	18
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 32 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF1,TF2,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF1,TF2,TF1)

7.1.45a.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	32
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
	DPDCH	8
		Number of Pilot bits/slot
	DPDCH	140
		2100

7.1.46 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

7.1.46.1 Uplink

See subclause 6.10.2.4.1.38d.1 of [1].

7.1.46.2 Downlink

7.1.46.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38d.2.1 of [1].

7.1.46.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	32
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
	DPDCH	4
		Number of Pilot bits/slot
	DPDCH	140
		2100

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.47 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95
5.9 4.75) kbps / CS RAB + Interactive or background / UL:0 DL:0
kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.38e of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 12 kbps plus support for 'Maximum number of simultaneous transport channels' = 5.

This is supported in Release '99.

7.1.48 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.48.1 Uplink

See subclause 6.10.2.4.1.38f.1 of [1].

7.1.48.2 Downlink

7.1.48.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38f.2.1 of [1].

7.1.48.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	64
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
		4
	DPDCH	Number of Pilot bits/slot
		8
		Number of data bits/slot
		60
		Number of data bits/frame
		900

The minimum UE classes supporting this combination are UL: 64kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.49 Conversational / speech / UL: (12.2 7.95 5.9 4.75) kbps DL: (12.2 7.95 5.9 4.75) / CS RAB + Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.49.1 Uplink

See subclause 6.10.2.4.1.38g.1 of [1].

7.1.49.2 Downlink

7.1.49.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38g.2.1 of [1].

7.1.49.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	64	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.50 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:32 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.50.1 Uplink

See subclause 6.10.2.4.1.38h.1 of [1].

7.1.50.2 Downlink

7.1.50.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38h.2.1 of [1].

7.1.50.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	32	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.51 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.51.1 Uplink

See subclause 6.10.2.4.1.38i.1 of [1].

7.1.51.2 Downlink

7.1.51.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38i.2.1 of [1].

7.1.51.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	32	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.52 Conversational / speech / UL: (12.2 7.95 5.9 4.75) DL: (12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.52.1 Uplink

See subclause 6.10.2.4.1.38j.1 of [1].

7.1.52.2 Downlink

7.1.52.2.1 Transport channel parameters

See subclause 6.10.2.4.1.38j.2.1 of [1].

7.1.52.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	16	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

The minimum UE classes supporting this combination are UL: 64kbp, DL: 128kbps.

This is supported in Release '99.

7.1.53 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH

7.1.53.1 Uplink

See subclause 6.10.2.4.1.39.1 of [1].

7.1.53.2 Downlink

7.1.53.2.1 Transport channel parameters

See subclause 6.10.2.4.1.39.2.1 of [1].

7.1.53.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.54 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH

7.1.54.1 Uplink

See subclause 6.10.2.4.1.40.1 of [1].

7.1.54.2 Downlink

See subclause 7.1.53.2.

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.55 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.55.1 Uplink

See subclause 6.10.2.4.1.41.1 of [1].

7.1.55.2 Downlink

7.1.55.2.1 Transport channel parameters

See subclause 6.10.2.4.1.41.2.1 of [1].

7.1.55.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		16
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.56 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.56.1 On DPCH

7.1.56.1.1 Uplink

See subclause 6.10.2.4.1.42.1 of [1].

7.1.56.1.2 Downlink

7.1.56.1.2.1 Transport channel parameters

See subclause 6.10.2.4.1.42.2.1 of [1].

7.1.56.1.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		8
	Number of DPDCH		1
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	608
		Number of data bits/frame	9120

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 384 kbps.

This is supported in Release '99.

7.1.56.2 On PDSCH and DPCH

7.1.56.2.1 Uplink

See subclause 6.10.2.4.1.40.1 of [1].

7.1.56.2.2 Downlink

7.1.56.2.2.1 Transport channel parameters

7.1.56.2.2.1.1 Transport channel parameters for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.56.2.2.1.2 Transport channel parameters for Interactive or background / DL:256 kbps / PS RAB

See subclause 6.10.2.4.2.1.2.1.1 of [1].

7.1.56.2.2.1.3 Transport channel parameters for DL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1. of [1].

7.1.56.2.2.1.4 TFCS

PDSCH	TFCS size	5 (alt.7)
	TFCS	256 kbps RAB = TF0, TF1, TF2, TF3, TF4 (alt. TF0, TF1, TF2, TF3, TF4, TF5, TF6)
DPCH Downlink associated with PDSCH	TFCS size	6
	TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH) = (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF2, TF1, TF1, TF0), (TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF1), (TF2, TF1, TF1, TF1)

7.1.56.2.2.2 Physical channel parameters

PDSCH	RAB or SRB, TrCh	Interactive or background / 256 kbps / PS RAB, DSCH
	DTX position	N/A (SingleTrCH)
	Minimum spreading factor	4
DPCH Downlink associated with PDSCH	RAB or SRB, TrCh	Conversational / speech / 12.2 kbps / CS RAB, DCH + 3.4 kbps SRBs for DCCH. DCH
	DTX position	Fixed
	Spreading factor	128
	DPCCH	Number of TFCI bits/slot
		2
		Number of TPC bits/slot
		2
DPDCH		Number of Pilot bits/slot
		4
	DPDCH	Number of data bits/slot
		32
		Number of data bits/frame
		480

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 384 kbps plus support of PDSCH.

This is supported in Release '99.

**7.1.57 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

7.1.57.1 On DPCH

7.1.57.1.1 Uplink

See subclause 6.10.2.4.1.43.1 of [1].

7.1.57.1.2 Downlink

7.1.57.1.2.1 Transport channel parameters

See subclause 6.10.2.4.1.43.2.1 of [1].

7.1.57.1.2.2 Physical channel parameters

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 384. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.57.2 On PDSCH and DPCH

See subclause 6.10.2.4.2.5 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 384 kbps plus support for PDSCH. The minimum UE class to support the alternative DL configuration (20ms TTI) is DL: 768kbps.

This is supported in Release '99.

7.1.58 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.58.1 Uplink

See subclause 6.10.2.4.2.6.1 of [1].

7.1.58.2 Downlink

7.1.58.2.1 Transport channel parameters

See subclause 6.10.2.4.1.44.2.1 of [1].

7.1.58.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	4	
	Number of DPDCH	3	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	1248
		Number of data bits/frame	18720

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 2048 kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.59 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.59.1 Uplink

See subclause 6.10.2.4.1.44.1 of [1].

7.1.59.2 Downlink

See subclause 7.1.58.2.

The minimum UE classes supporting this combination are UL: 384 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 2048 kbps plus support for 'Maximum sum of number of bits of all transport blocks being received at an arbitrary time instant' = 40960 (81920 for the

TTI=20ms alternative) and 'Maximum sum of number of bits of all turbo coded transport blocks being received at an arbitrary time instant' = 40960 (81920 for the TTI=20ms alternative).

This is supported in Release '99.

7.1.60 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.60.1 Uplink

See subclause 6.10.2.4.1.45.1 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.61 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.61.1 Uplink

See subclause 6.10.2.4.1.4.1 of [1].

7.1.61.2 Downlink

7.1.61.2.1 Transport channel parameters

7.1.61.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.61.2.1.2 Transport channel parameters for Streaming / unknown / DL:64 kbps / CS RAB

See subclause 6.10.2.4.1.18.2.1.1 of [1].

6.10.2.4.1.46.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.61.2.1.4 TFCS

TFCS size	30
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB , DCCH)= (TF0, TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0, TF0), (TF2, TF1, TF1, TF0, TF0), (TF0, TF0, TF0, TF1, TF0), (TF1, TF0, TF0, TF1, TF0), (TF2, TF1, TF1, TF1, TF0), (TF0, TF0, TF0, TF2, TF0), (TF1, TF0, TF0, TF2, TF0), (TF2, TF1, TF1, TF2, TF0), (TF0, TF0, TF0, TF3, TF0), (TF1, TF0, TF0, TF3, TF0), (TF2, TF1, TF1, TF3, TF0), (TF0, TF0, TF0, TF4, TF0), (TF1, TF0, TF0, TF4, TF0), (TF2, TF1, TF1, TF4, TF0), (TF0, TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF0, TF1), (TF2, TF1, TF1, TF0, TF1), (TF0, TF0, TF0, TF1, TF1), (TF1, TF0, TF0, TF1, TF1), (TF2, TF1, TF1, TF1, TF1), (TF0, TF0, TF0, TF2, TF1), (TF1, TF0, TF0, TF2, TF1), (TF2, TF1, TF1, TF2, TF1), (TF0, TF0, TF0, TF3, TF1), (TF1, TF0, TF0, TF3, TF1), (TF2, TF1, TF1, TF3, TF1), (TF0, TF0, TF0, TF4, TF1), (TF1, TF0, TF0, TF4, TF1), (TF2, TF1, TF1, TF4, TF1)

7.1.61.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

The minimum UE classes supporting this combination are UL: 12 kbps plus support for 'Maximum number of simultaneous transport channels' = 5, DL: 128kbps.

This is supported in Release '99.

7.1.62 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.49 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.63 Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.49a of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.64 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.50 of [1].

The minimum UE classes supporting this combination are UL: 128kbps, DL: 128kbps. The minimum UE class to support the alternative UL combination (40ms TTI) is UL: 384kbps.

This is supported in Release '99.

7.1.65 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.65.1 Uplink

See subclause 6.10.2.4.1.51.1 of [1].

7.1.65.2 Downlink

7.1.65.2.1 Transport channel parameters

See subclause 6.10.2.4.1.51.2.1 of [1].

7.1.65.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		16
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

The minimum UE classes supporting this combination are UL: 128kbps, DL: 128kbps. The minimum UE class to support the alternative UL combination (40ms TTI) is UL: 384kbps.

This is supported in Release '99.

7.1.66 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.66.1 Uplink

See subclause 6.10.2.4.1.51a.1 of [1].

7.1.66.2 Downlink

7.1.66.2.1 Transport channel parameters

See subclause 6.10.2.4.1.51a.2.1 of [1].

7.1.66.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.67 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.67.1 Uplink

See subclause 6.10.2.4.1.51b.1 of [1].

7.1.67.2 Downlink

See subclause 7.1.65.2.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.68 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.68.1 Uplink

See subclause 6.10.2.4.1.52.1 of [1].

7.1.68.2 Downlink

7.1.68.2.1 Transport channel parameters

See subclause 6.10.2.4.1.52.2.1 of [1].

7.1.68.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	8
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
		8
		Number of Pilot bits/slot
	DPDCH	16
	Number of data bits/slot	608
	Number of data bits/frame	9120

The minimum UE classes supporting this combination are UL: 128kbps, DL: 384kbps. The minimum UE class to support the alternative UL combination (40ms TTI) is UL: 384kbps.

This is supported in Release '99.

7.1.69 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.69.1 Uplink

See subclause 6.10.2.4.1.53.1 of [1].

7.1.69.2 Downlink

See subclause 7.1.68.2.

The minimum UE classes supporting this combination are UL: 384kbps, DL: 384kbps.

This is supported in Release '99.

7.1.70 Interactive or background / UL:64 DL:128 kbps / PS RAB + Streaming / unknown / UL:0 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.70.1 Uplink

7.1.70.1.1 Transport channel parameters

7.1.70.1.1.1 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB + UL:8 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	8000	8000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	1080	
	Uplink: Max number of bits/radio frame before rate matching	270	
	RM attribute	135-175	

7.1.70.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

6.10.2.4.1.56.1.1.3 TFCS

TFCS size	4
TFCS	(8 kbps RAB + 8 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF0,TF1), (TF1,TF1)

7.1.70.1.2 Physical channel parameters

DPCCH Uplink	Min spreading factor	64
	Max number of DPDCH data bits/radio frame	600
	Puncturing Limit	1.0

7.1.70.2 Downlink

7.1.70.2.1 Transport channel parameters

7.1.70.2.1.1 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB + DL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	8000	8000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	1080	
	RM attribute	135-175	

7.1.70.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.70.2.1.3 TFCS

TFCS size	4
TFCS	(8 kbps RAB + 8 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF0,TF1), (TF1,TF1)

7.1.70.2.2 Physical channel parameters

DPCCH Downlink	DTX position	Flexible or fixed
	Spreading factor	128
DPCCH	Number of TFCI bits/slot	2
	Number of TPC bits/slot	2
	Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot
		32
		Number of data bits/frame
		480

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps.

This is supported in Release '99.

7.1.71 Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.71.1 Uplink

See subclause 6.10.2.4.1.56.1 of [1].

7.1.71.2 Downlink

7.1.71.2.1 Transport channel parameters

See subclause 6.10.2.4.1.56.2.1 of [1].

7.1.71.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	128
	DPCCH	Number of TFCI bits/slot
		2
		Number of TPC bits/slot
	DPDCH	Number of Pilot bits/slot
		4
	DPDCH	Number of data bits/slot
		32
	Number of data bits/frame	
	480	

The minimum UE classes supporting this combination are UL: 32kbps plus support for turbo encoding, DL: 32kbps plus support for 5 AM entities.

This is supported in Release '99.

7.1.72 Interactive or background / UL:64 DL:64 kbps / PS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.72.1 Uplink

See subclause 6.10.2.4.1.57.1 of [1].

7.1.72.2 Downlink

7.1.72.2.1 Transport channel parameters

See subclause 6.10.2.4.1.57.2.1 of [1].

7.1.72.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	32
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
	DPDCH	Number of Pilot bits/slot
		8
	DPDCH	Number of data bits/slot
		140
	Number of data bits/frame	
	2100	

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps plus support for 5 AM entities.

This is supported in Release '99.

7.1.73 Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

7.1.73.1 Uplink

See subclause 6.10.2.4.1.58.1 of [1].

7.1.73.2 Downlink

7.1.73.2.1 Transport channel parameters

See subclause 6.10.2.4.1.58.2.1 of [1].

7.1.73.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	32
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
	DPDCH	Number of Pilot bits/slot
		8
	DPDCH	Number of data bits/slot
		140
		Number of data bits/frame
		2100

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps plus support for 5 AM entities.

This is supported in Release '99.

7.1.73a Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH – Alternative

This configuration optimises the flexibility of the Transport Format Selection by adding an omitted Transport Format, to the transport channel parameters given in the reference subclause 6.10.2.4.1.58 of [1], for the downlink, transport channel Streaming / unknown / DL:64 kbps PS RAB.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps plus support for 5 AM entities.

This is supported in Release "99."

7.1.73a.1 Uplink

See subclause 6.10.2.4.1.58.1 of [1]

7.1.73a.2 Downlink

7.1.73a.2.1 Transport channel parameters

7.1.73a.2.1.1 Transport channel parameters for Streaming / unknown / DL:64 kbps / PS RAB

Higher layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		AM
	Payload sizes, bit		640
	Max data rate, bps		64000
	AM PDU header, bit		16
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		656
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	3x656
		TF4, bits	4x656
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		8076
	RM attribute		125-165

7.1.73a.2.1.2 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1].

7.1.73a.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.73a.2.1.4 TFCS

TFCS size	20
TFCS	(64 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF4,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF4,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF4,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1), (TF4,TF1,TF1),

7.1.73a.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	32
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
	Number of Pilot bits/slot	4
DPDCH	Number of data bits/slot	8
	Number of data bits/frame	140
		2100

7.1.74 Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.74.1 Uplink

See subclause 6.10.2.4.1.58a.1 of [1].

7.1.74.2 Downlink

7.1.74.2.1 Transport channel parameters

See subclause 6.10.2.4.1.58a.2.1 of [1].

7.1.74.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		16
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

7.1.75 Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:8 kbps / PS RAB – TF0 contains zero Transport Blocks .

NOTE: Conversational / unknown / DL:8 kbps / PS RAB – TF0 contains zero Transport Blocks.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.75.1 Uplink

7.1.75.1.1 Transport channel parameters

7.1.75.1.1.1 Transport channel parameters for Conversational / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	8000
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	328
	TFS	TF0, bits 0x328
		TF1, bits 1x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1044
	Uplink: Max number of bits/radio frame before rate matching	261
	RM attribute	135-175

7.1.75.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.75.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.75.1.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

7.1.75.1.2 Physical channel parameters

DPCH	Min spreading factor	32
Uplink	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.75.2 Downlink

7.1.75.2.1 Transport channel parameters

7.1.75.2.1.1 Transport channel parameters for Conversational / unknown / DL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	8000
	AMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	328
	TFS	TF0, bits
		0x328
	TTI, ms	1x328
		40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1044
	RM attribute	135-175

7.1.75.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1].

7.1.75.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.75.2.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

7.1.75.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	64
	DPCCH	8
		4
		8
	DPDCH	60
		900

7.1.76 Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:8 kbps / PS RAB – TF0 contains one Transport Block of zero size.

NOTE: Conversational / unknown / DL:8 kbps / PS RAB – TF0 contains one Transport Block of zero size.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.76.1 Uplink

7.1.76.1.1 Transport channel parameters

7.1.76.1.1.1 Transport channel parameters for Conversational / unknown / UL:8 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	8000
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	0, 328
	TFS	TF0, bits
		1x0
		TF1, bits
		1x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1044
	Uplink: Max number of bits/radio frame before rate matching	261
	RM attribute	135-175

7.1.76.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.76.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.76.1.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

7.1.76.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.76.2 Downlink

7.1.76.2.1 Transport channel parameters

7.1.76.2.1.1 Transport channel parameters for Conversational / unknown / DL:8 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	8000
	AMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	0, 328
	TFS	1x0
		1x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1044
	RM attribute	135-175

7.1.76.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1].

7.1.76.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.76.2.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

7.1.76.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	64
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
		4
		Number of Pilot bits/slot
	DPDCH	60
		Number of data bits/slot
		900
		Number of data bits/frame

7.1.77 Conversational / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:16 kbps / PS RAB – TF0 contains zero Transport Blocks.

NOTE: Conversational / unknown / DL:16 kbps / PS RAB – TF0 contains zero Transport Blocks.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.77.1 Uplink

7.1.77.1.1 Transport channel parameters

7.1.77.1.1.1 Transport channel parameters for Conversational / unknown / UL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	UMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	328	
	TFS	TF0, bits	0x328
		TF1, bits	1x328
		TF2, bits	2x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2076	
	Uplink: Max number of bits/radio frame before rate matching	519	
	RM attribute	135-175	

7.1.77.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.77.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.77.1.1.4 TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.77.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.77.2 Downlink

7.1.77.2.1 Transport channel parameters

7.1.77.2.1.1 Transport channel parameters for Conversational / unknown / DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	AMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	328	
	TFS	TF0, bits	0x328
		TF1, bits	1x328
		TF2, bits	2x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2076	
	RM attribute	135-175	

7.1.77.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.77.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.77.2.1.4 TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.77.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	64	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.78 Conversational / unknown / UL:16 kbps / PS RAB + Interactive or Background / UL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:16 kbps / PS RAB – TF0 contains one Transport Block of zero size.

NOTE: Conversational / unknown / DL:16 kbps / PS RAB – TF0 contains one Transport Block of zero size.

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

7.1.78.1 Uplink

7.1.78.1.1 Transport channel parameters

7.1.78.1.1.1 Transport channel parameters for Conversational / unknown / UL:16 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	UM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	UMD PDU header, bit	8	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	0, 328	
	TFS	TF0, bits	1x0
		TF1, bits	1x328
		TF2, bits	2x328
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2076	
	Uplink: Max number of bits/radio frame before rate matching	519	
	RM attribute	135-175	

7.1.78.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.78.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.78.1.1.4 TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.78.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.78.2 Downlink

7.1.78.2.1 Transport channel parameters

7.1.78.2.1.1 Transport channel parameters for Conversational / unknown / DL:16 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		UM
	Payload sizes, bit		320
	Max data rate, bps		16000
	AMD PDU header, bit		8
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		0, 328
	TFS	TF0, bits	1x0
		TF1, bits	1x328
		TF2, bits	2x328
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		2076
	RM attribute		135-175

7.1.78.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.78.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.78.2.1.4

TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.78.2.2

Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.79 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.79.1 Uplink

7.1.79.1.1 Transport channel parameters

7.1.79.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.79.1.1.2 Transport channel parameters for Interactive or Background / UL:0 + UL:0 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	0	0
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS TF0, bits	0x340	
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	0	
	Uplink: Max number of bits/radio frame before rate matching	0	
	RM attribute	130-170	

7.1.79.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.79.1.1.4 TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0+0kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1)

7.1.79.1.2 Physical channel parameters

DPCH	Min spreading factor	64
Uplink	Max number of DPDCH data bits/radio frame	600
	Puncturing Limit	0.84

7.1.79.2 Downlink

7.1.79.2.1 Transport channel parameters

7.1.79.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.79.2.1.2 Transport channel parameters for Interactive or Background / DL:0 + DL:0 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	0	0
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits 0x340	
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	0	
	RM attribute	130-170	

7.1.79.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.79.2.1.4 TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0+0kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1)

7.1.79.2.2 Physical channel parameters

DPCH Downlink	DTX position	Fixed
	Spreading factor	128
DPCCH	Number of TFCI bits/slot	0
	Number of TPC bits/slot	2
	Number of Pilot bits/slot	4
DPDCH	Number of data bits/slot	34
	Number of data bits/frame	510

- 7.1.79a Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB
 + Interactive or background / UL:0 DL:0 kbps / PS RAB
 + Interactive or background / UL:0 DL:0 kbps / PS RAB
 + UL:3.4 DL:3.4 kbps SRBs for DCCH (L1 multiplexing) (FDD)

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.79a.1 Uplink

7.1.79a.1.1 Transport channel parameters

7.1.79a.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.79a.1.1.2 Transport channel parameters for Interactive or background / UL:0 kbps / PS RAB

See subclause 6.10.2.4.1.38a.1.1.2 of [1].

7.1.79a.1.1.3 Transport channel parameters for Interactive or background / UL:0 kbps / PS RAB

See subclause 6.10.2.4.1.38a.1.1.2 of [1].

7.1.79a.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.79a.1.1.5 TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0 kbps RAB, 0 kbps RAB, DCCH)= (TF0, TF0, TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0, TF0, TF0), (TF2, TF1, TF1, TF0, TF0, TF0), (TF0, TF0, TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF0, TF0, TF1), (TF2, TF1, TF1, TF0, TF0, TF1)

7.1.79a.1.2 Physical channel parameters

See subclause 6.10.2.4.1.38a.1.2 of [1].

7.1.79a.2 Downlink

7.1.79a.2.1 Transport channel parameters

7.1.79a.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.79a.2.1.2 Transport channel parameters for Interactive or background / DL:0 kbps / PS RAB

See subclause 6.10.2.4.1.38a.2.1.2 of [1].

7.1.79a.2.1.3 Transport channel parameters for Interactive or background / DL:0 kbps / PS RAB

See subclause 6.10.2.4.1.38a.2.1.2 of [1].

7.1.79a.2.1.4 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.79a.2.1.5 TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0 kbps RAB, 0 kbps RAB, DCCH)= (TF0, TF0, TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0, TF0), (TF2, TF1, TF1, TF0, TF0, TF0), (TF0, TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF0, TF1), (TF2, TF1, TF1, TF0, TF1)

7.1.79a.2.2 Physical channel parameters

See subclause 6.10.2.4.1.38a.2.2 of [1].

7.1.80 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.80.1 Uplink

7.1.80.1.1 Transport channel parameters

7.1.80.1.1.1 Transport channel parameters for Conversational / unknown / UL:64 kbps / CS RAB

See subclause 6.10.2.4.1.13.1.1.1 of [1].

7.1.80.1.1.2 Transport channel parameters for Interactive or Background / UL:8 + UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.1.1.1 of [1]

7.1.80.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.80.1.1.4 TFCS

TFCS size	8
TFCS	(64 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.80.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.72

7.1.80.2 Downlink

7.1.80.2.1 Transport channel parameters

7.1.80.2.1.1 Transport channel parameters for Conversational / unknown / DL:64 kbps / CS RAB

See subclause 6.10.2.4.1.13.2.1.1 of [1].

7.1.80.2.1.2 Transport channel parameters for Interactive or Background / DL:8 + DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.2.1.1 of [1]

7.1.80.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.80.2.1.4 TFCS

TFCS size	8
TFCS	(64 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.80.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	32
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
	DPDCH	Number of Pilot bits/slot
		8
	DPDCH	Number of data bits/slot
		140
		Number of data bits/frame
		2100

7.1.81 Streaming / unknown / UL:8 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.81.1 Uplink

7.1.81.1.1 Transport channel parameters

7.1.81.1.1.1 Transport channel parameters for Streaming / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320
	Max data rate, bps	8000
	AMD PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	336
	TFS	TF0, bits 0x336
		TF1, bits 1x336
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1068
	Uplink: Max number of bits/radio frame before rate matching	267
	RM attribute	135-175

7.1.81.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.81.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.81.1.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.81.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.81.2 Downlink

7.1.81.2.1 Transport channel parameters

7.1.81.2.1.1 Transport channel parameters for Streaming / unknown / DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		AM
	Payload sizes, bit		640
	Max data rate, bps		16000
	AMD PDU header, bit		16
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		656
	TFS	TF0, bits	0x656
		TF1, bits	1x656
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		2028
	RM attribute		125-165

7.1.81.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.81.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.81.2.1.4 TFCS

TFCS size	8
TFCS	(16 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.81.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	64
DPCCH	Number of TFCI bits/slot	8
	Number of TPC bits/slot	4
	Number of Pilot bits/slot	8
DPDCH	Number of data bits/slot	60
	Number of data bits/frame	900

7.1.82 Streaming / unknown / UL:8 DL:32 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.82.1 Uplink

7.1.82.1.1 Transport channel parameters

7.1.82.1.1.1 Transport channel parameters for Streaming / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320
	Max data rate, bps	8000
	AMD PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	336
	TFS	0x336
		1x336
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1068
	Uplink: Max number of bits/radio frame before rate matching	267
	RM attribute	135-175

7.1.82.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.82.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.82.1.1.4 TFCS

TFCS size	8
TFCS	(8 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

7.1.82.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.82.2 Downlink

7.1.82.2.1 Transport channel parameters

7.1.82.2.1.1 Transport channel parameters for Streaming / unknown / DL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	32000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	4044	
	RM attribute	125-165	

7.1.82.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.82.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.82.2.1.4 TFCS

TFCS size	12
TFCS	(32 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

7.1.82.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

7.1.83 Streaming / unknown / UL:32 DL:256 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps.

This is supported in Release '99.

7.1.83.1 Uplink

7.1.83.1.1 Transport channel parameters

7.1.83.1.1.1 Transport channel parameters for Streaming / unknown / UL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320
	Max data rate, bps	32000
	AMD PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	336
	TFS	0x336
		1x336
		2x336
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2124
	Uplink: Max number of bits/radio frame before rate matching	1062
	RM attribute	135-175

7.1.83.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1]

7.1.83.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.83.1.1.4 TFCS

TFCS size	12
TFCS	(32 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1)

7.1.83.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1.0

7.1.83.2 Downlink

7.1.83.2.1 Transport channel parameters

7.1.83.2.1.1 Transport channel parameters for Streaming / unknown / DL:256 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	256000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	3x656
		TF4, bits	4x656
	TTI, ms	10	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8076	
	RM attribute	125-165	

7.1.83.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.83.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.83.2.1.4 TFCS

TFCS size	20
TFCS	(256 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF4,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF4,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF4,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1), (TF4,TF1,TF1),

7.1.83.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	8	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	608
		Number of data bits/frame	9120

7.1.84 Interactive or background / UL:16 DL:16 kbps / PS RAB + Interactive or Background / UL:16 DL:16 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.84.1 Uplink

7.1.84.1.1 Transport channel parameters

7.1.84.1.1.1 Transport channel parameters for Interactive or Background / UL:16 + UL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	16000	16000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2148	
	Uplink: Max number of bits/radio frame before rate matching	537	
	RM attribute	135-175	

7.1.84.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.84.1.1.3 TFCS

TFCS size	6
TFCS	(16 kbps RAB + 16 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1)

7.1.84.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1.0

7.1.84.2 Downlink

7.1.84.2.1 Transport channel parameters

7.1.84.2.1.1 Transport channel parameters for Interactive or background / DL:16 + DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	16000	16000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2148	
	RM attribute	135-175	

7.1.84.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.84.2.1.3 TFCS

TFCS size	6
TFCS	(16 kbps RAB + 16 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1)

7.1.84.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	128
	DPCCH	Number of TFCI bits/slot
		2
		Number of TPC bits/slot
	DPDCH	Number of Pilot bits/slot
		4
	DPDCH	Number of data bits/slot
		32
	Number of data bits/frame	
	480	

7.1.85 Interactive or background / UL:64 DL:8 kbps / PS RAB + Interactive or Background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.85.1 Uplink

See subclause 6.10.2.4.1.57.1 of [1].

7.1.85.2 Downlink

See subclause 7.1.71.2.

7.1.86 Interactive or Background / UL:64 DL:128 kbps / PS RAB + Interactive or Background / UL:64 DL:128 kbps / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 128kbps.

This is supported in Release '99.

7.1.86.1 Uplink

See subclause 6.10.2.4.1.57.1 of [1]

7.1.86.2 Downlink

7.1.86.2.1 Transport channel parameters

7.1.86.2.1.1 Transport channel parameters for Interactive or background / DL:128 + DL:128 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	128000	128000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	4x340
		TF4, bits	8x340
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8556	
	RM attribute	120-160	

7.1.86.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.86.2.1.3 TFCS

TFCS size	10
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF3,TF0), (TF4,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF3,TF1), (TF4,TF1)

7.1.86.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	16	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

7.1.87 Interactive or Background / UL:64 DL:384 kbps / PS RAB +
Interactive or Background / UL:64 DL:384 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps.

This is supported in Release '99.

7.1.87.1 Uplink

See subclause 6.10.2.4.1.57.1 of [1].

7.1.87.2 Downlink

7.1.87.2.1 Transport channel parameters

7.1.87.2.1.1 Transport channel parameters for Interactive or background / DL:384 + DL:384 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	384000	384000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	4x340
		TF4, bits	8x340
		TF5, bits	12x340
	TTI, ms	10	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	12828	
	RM attribute	110-150	

7.1.87.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.87.2.1.3 TFCS

TFCS size	12
TFCS	(384 kbps RAB + 384 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF5, TF0) (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1), (TF5, TF1)

7.1.87.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	8
	DPCCH	8
		8
		16
DPDCH	Number of data bits/slot	608
	Number of data bits/frame	9120

7.1.88 Interactive or background / UL:128 DL:128 kbps / PS RAB +
Interactive or Background / UL:128 DL:128 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps, DL: 128kbps.

This is supported in Release '99.

7.1.88.1 Uplink

7.1.88.1.1 Transport channel parameters

7.1.88.1.1.1 Transport channel parameters for Interactive or Background / UL:128 + UL:128 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	128000	128000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	4x340
		TF4, bits	8x340
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8556	
	Uplink: Max number of bits/radio frame before rate matching	4278	
	RM attribute	120-160	

7.1.88.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.88.1.3 TFCS

TFCS size	10
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

7.1.88.1.2 Physical channel parameters

DPCH	Min spreading factor	8
Uplink	Max number of DPDCH data bits/radio frame	4800
	Puncturing Limit	0.96

7.1.88.2 Downlink

7.1.88.2.1 Transport channel parameters

7.1.88.2.1.1 Transport channel parameters for Interactive or background / DL:128 + DL:128 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	128000	128000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	4x340
		TF4, bits	8x340
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8556	
	RM attribute	120-160	

7.1.88.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.88.2.1.3 TFCS

TFCS size	10
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF3,TF0), (TF4,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF3,TF1), (TF4,TF1)

7.1.88.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	16
DPCCH	Number of TFCI bits/slot	8
	Number of TPC bits/slot	8
	Number of Pilot bits/slot	16
	Number of data bits/slot	288
DPDCH	Number of data bits/frame	4320

7.1.89 Interactive or background / UL:128 DL:32 kbps / PS RAB +
Interactive or Background / UL:128 DL:32 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps, DL: 32kbps.

This is supported in Release '99.

7.1.89.1 Uplink

See subclause 7.1.88.1

7.1.89.2 Downlink

7.1.89.2.1 Transport channel parameters

7.1.89.2.1.1 Transport channel parameters for Interactive or background / DL:32 + DL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	32000	32000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	3x340
		TF4, bits	4x340
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	4284	
	RM attribute	135-175	

7.1.89.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.89.2.1.3 TFCS

TFCS size	10
TFCS	(32 kbps RAB + 32 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0) (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

7.1.89.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	64
DPCCH	Number of TFCI bits/slot	8
	Number of TPC bits/slot	4
	Number of Pilot bits/slot	8
DPDCH	Number of data bits/slot	60
	Number of data bits/frame	900

7.1.90 Streaming / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.90.1 Uplink

See subclause 6.10.2.4.1.58.1 of [1].

7.1.90.2 Downlink

See subclause 7.1.81.2.

7.1.91 Streaming / unknown / UL:16 DL:32 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.91.1 Uplink

See subclause 6.10.2.4.1.58.1 of [1].

7.1.91.2 Downlink

See subclause 7.1.82.2.

7.1.92 Interactive or background / UL:16 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.92.1 Uplink

See subclause 6.10.2.4.1.23b.1 of [1].

7.1.92.2 Downlink

See subclause 7.1.26.2.

7.1.93 Interactive or background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

7.1.93.1 Uplink

See subclause 6.10.2.4.1.23b.1 of [1].

7.1.93.2 Downlink

See subclause 7.1.29.2.

7.1.94 Interactive or background / UL:16 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.94.1 Uplink

See subclause 6.10.2.4.1.23b.1 of [1].

7.1.94.2 Downlink

See subclause 7.1.31.2.

7.1.95 Conversational / speech / UL:12.2 DL:12.2 kbps + Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in release '99.

7.1.95.1 Uplink**7.1.95.1.1 Transport channel parameters****7.1.95.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB**

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.95.1.1.2 Transport channel parameters for Streaming / unknown / UL:16 kbps

See subclause 6.10.2.4.1.58.1.1.1 of [1].

7.1.95.1.1.3 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1].

7.1.95.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.95.1.1.5 TFCS

TFCS size	24
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 16 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1)

7.1.95.1.2 Physical channel parameters

DPCCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1.0

7.1.95.2 Downlink

7.1.95.2.1 Transport channel parameters

7.1.95.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1]

7.1.95.2.1.2 Transport channel parameters for Streaming / unknown / DL:128 kbps / PS RAB

See subclause 6.10.2.4.1.58a.2.1.1 of [1].

7.1.95.2.1.3 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.95.2.1.4 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.95.2.1.5

TFCS

TFCS size	60
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 128 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF4,TF0,TF0), (TF1,TF0,TF0,TF4,TF0,TF0), (TF2,TF1,TF1,TF4,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF4,TF1,TF0), (TF1,TF0,TF0,TF4,TF1,TF0), (TF2,TF1,TF1,TF4,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF4,TF1,TF1), (TF1,TF0,TF0,TF4,TF1,TF1), (TF2,TF1,TF1,TF4,TF1,TF1)

7.1.95.2.2

Physical channel parameters

DPCCH Downlink	DTX position		Flexible or fixed
	Spreading factor		
DPCCH	Number of TFCI bits/slot	8	16
	Number of TPC bits/slot	8	
	Number of Pilot bits/slot	16	
DPDCH	Number of data bits/slot	288	
	Number of data bits/frame	4320	

7.1.96 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
 Streaming / unknown / UL:128 DL:16 kbps / PS RAB + Interactive
 or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps
 SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128 kbps, DL: 64 kbps.

This is supported in release '99.

7.1.96.1 Uplink

7.1.96.1.1 Transport channel parameters

7.1.96.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1]

7.1.96.1.1.2 Transport channel parameters for Streaming / unknown / UL:128 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	640
	Max data rate, bps	128000
	AM PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	656
	TFS	0x656
		1x656
		2x656
		4x656
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	8076
	Uplink: Max number of bits/radio frame before rate matching	4038
	RM attribute	125-165

7.1.96.1.1.3 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1].

7.1.96.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.96.1.1.5 TFCS

TFCS size	48
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 128 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1)

7.1.96.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	8
	Max number of DPDCH data bits/radio frame	4800
	Puncturing Limit	0.92

7.1.96.2 Downlink

7.1.96.2.1 Transport channel parameters

7.1.96.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1]

7.1.96.2.1.2 Transport channel parameters for Streaming / unknown / DL:16 kbps / PS RAB

See subclause 7.1.81.2.1.1

7.1.96.2.1.3 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1].

7.1.96.2.1.4 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.96.2.1.5 TFCS

TFCS size	24
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 16 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1)

7.1.96.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	64
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
		4
	DPDCH	Number of Pilot bits/slot
		8
	DPDCH	Number of data bits/slot
		60
		Number of data bits/frame
		900

7.1.97 Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6)
kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15
kbps SRB#5 for DCCH

See subclause 6.10.2.4.1.62 of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps plus support for 'Maximum number of TFC' = 32.

This is supported in Release 5.

**7.1.98 Interactive or background / UL:32 DL:64 kbps / PS RAB +
Interactive or background / UL:32 DL:64 kbps / PS RAB + UL:3.4
DL: 3.4 kbps SRBs for DCCH (L1 multiplexing) (FDD)**

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

7.1.98.1 Uplink

7.1.98.1.1 Transport channel parameters

7.1.98.1.1.1 Transport channel parameters for Interactive or background / UL:32 kbps / PS RAB

See subclause 6.10.2.4.1.23.1.1.1 of [1].

7.1.98.1.1.2 Transport channel parameters for Interactive or background / UL:32 kbps / PS RAB

See subclause 6.10.2.4.1.23.1.1.1 of [1].

7.1.98.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.98.1.1.4 TFCS

TFCS size	18 (alt. 8)
TFCS	(I/B 32 kbps RAB, I/B 32 kbps RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF2, TF2, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1), (TF2, TF2, TF1) (alt. (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1))

7.1.98.1.2 Physical channel parameters

DPCCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1

7.1.98.2 Downlink

7.1.98.2.1 Transport channel parameters

7.1.98.2.1.1 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.25.2.1.1 of [1].

7.1.98.2.1.2 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.25.2.1.1 of [1].

7.1.98.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.98.2.1.4 TFCS

TFCS size	50
TFCS	(I/B 64 kbps RAB, I/B 64 kbps RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF2, TF2, TF0), (TF3, TF2, TF0), (TF4, TF2, TF0), (TF0, TF3, TF0), (TF1, TF3, TF0), (TF2, TF3, TF0), (TF3, TF3, TF0), (TF4, TF3, TF0), (TF0, TF4, TF0), (TF1, TF4, TF0), (TF2, TF4, TF0), (TF3, TF4, TF0), (TF4, TF4, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1), (TF2, TF2, TF1), (TF3, TF2, TF1), (TF4, TF2, TF1), (TF0, TF3, TF1), (TF1, TF3, TF1), (TF2, TF3, TF1), (TF3, TF3, TF1), (TF4, TF3, TF1), (TF0, TF4, TF1), (TF1, TF4, TF1), (TF2, TF4, TF1), (TF3, TF4, TF1), (TF4, TF4, TF1)

7.1.98.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	16
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
		8
	DPDCH	Number of Pilot bits/slot
		16
	DPDCH	Number of data bits/slot
		288
		Number of data bits/frame
		4320

7.1.99 Interactive or background / UL:128 DL: 64k / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 64kbps.

7.1.99.1 Uplink

7.1.99.1.1 Transport channel parameters

7.1.99.1.1.1 Transport channel parameters for Interactive or background / UL:128 kbps / PS RAB

See subclause 6.10.2.4.1.28.1.1.1 of [1]

7.1.99.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1. of [1]

7.1.99.1.1.3 TFCS

See subclause 6.10.2.4.1.28.1.1.3 of [1]

7.1.99.1.2 Physical channel parameters

See subclause 6.10.2.4.1.28.1.2 of [1]

7.1.99.2 Downlink

7.1.99.2.1 Transport channel parameters

7.1.99.2.1.1 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.25.2.1.1 of [1]

7.1.99.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1. of [1]

7.1.99.2.1.3 TFCS

See subclause 6.10.2.4.1.25.2.1.3 of [1].

7.1.99.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	32	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

7.1.100 Interactive or background / UL:384 DL: 64k / PS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 384kbps, DL: 64kbps. The minimum UE class to support the alternative UL physical configuration 2 is UL: 384kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 32.

7.1.100.1 Uplink

7.1.100.1.1 Transport channel parameters

7.1.100.1.1.1 Transport channel parameters for Interactive or background / UL:384 kbps / PS RAB

See subclause 6.10.2.4.1.34.1.1.1 of [1]

7.1.100.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.100.1.1.3 TFCS

See subclause 6.10.2.4.1.34.1.1.3 of [1]

7.1.100.1.2 Physical channel parameters

See subclause 6.10.2.4.1.34.1.2 of [1]

7.1.100.2 Downlink

7.1.100.2.1 Transport channel parameters

7.1.100.2.1.1 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.25.2.1.1 of [1]

7.1.100.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1. of [1]

7.1.100.2.1.3 TFCS

See subclause 6.10.2.4.1.25.2.1.3 of [1].

7.1.100.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	32	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

7.1.101 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:128 DL:64 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL: 64kbps.

7.1.101.1 Uplink

7.1.101.1.1 Transport channel parameters

7.1.101.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.101.1.1.2 Transport channel parameters for Interactive or background / UL:128 kbps / PS RAB

See subclause 6.10.2.4.1.28.1.1.1 of [1].

7.1.101.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.101.1.1.4 TFCS

See subclause 6.10.2.4.1.44.1.1.4 of [1]

7.1.101.1.2 Physical channel parameters

See subclause 6.10.2.4.1.44.1.2 of [1]

7.1.101.2 Downlink

7.1.101.2.1 Transport channel parameters

7.1.101.2.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.101.2.1.2 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.25.2.1.1 of [1]

7.1.101.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

7.1.101.2.1.4 TFCS

See subclause 6.10.2.4.1.39.2.1.4 of [1].

7.1.101.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	32
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
	DPDCH	Number of Pilot bits/slot
		8
	DPDCH	Number of data bits/slot
		140
		Number of data bits/frame
		2100

7.1.102 Interactive or background / UL:384 DL: 128kbps / PS RAB + UL:3.4 DL:3.4 kb/s Signalling Radio Bearers for DCCH

The minimum UE classes supporting this combination are UL: 384kbps, DL: 128kbps. The minimum UE class to support the alternative UL physical configuration 2 is UL: 384kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 32.

7.1.102.1 Uplink

7.1.102.1.1 Transport channel parameters

7.1.102.1.1.1 Transport channel parameters for Interactive or background / UL:384 kbps / PS RAB

See subclause 6.10.2.4.1.34.1.1.1 of [1].

7.1.102.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.102.1.1.3 TFCS

See subclause 6.10.2.4.1.34.1.1.3 of [1].

7.1.102.1.2 Physical channel parameters

See subclause 6.10.2.4.1.34.1.2 of [1].

7.1.102.2 Downlink

7.1.102.2.1 Transport channel parameters

7.1.102.2.1.1 Transport channel parameters for Interactive or background / DL:128 kbps / PS RAB

See subclause 6.10.2.4.1.27.2.1.1 of [1].

7.1.102.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1. of [1].

7.1.102.2.1.3 TFCS

See subclause 6.10.2.4.1.27.2.1.3 of [1].

7.1.102.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	16	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

**7.1.103 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:384 DL: 64kbps / PS RAB + UL:3.4
DL:3.4 kbps Signalling Radio Bearers for DCCH**

The minimum UE classes supporting this combination are UL: 384kbps, DL: 64kbps. The minimum UE class to support the alternative UL physical configuration 2 is UL: 384kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 32.

7.1.103.1 Uplink

7.1.103.1.1 Transport channel parameters

7.1.103.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1. of [1].

7.1.103.1.1.2 Transport channel parameters for Interactive or background / UL:384 kbps / PS RAB

See subclause 6.10.2.4.1.34.1.1.1 of [1].

7.1.103.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.103.1.1.4 TFCS

See subclause 6.10.2.4.5.3.1.1.4 of [1].

7.1.103.1.2 Physical channel parameters

See subclause 6.10.2.4.5.3.1.2 of [1].

7.1.103.2 Downlink

7.1.103.2.1 Transport channel parameters

7.1.103.2.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.103.2.1.2 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.25.2.1.1 of [1].

7.1.103.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.103.2.1.3 TFCS

See subclause 6.10.2.4.1.39.2.1.4 of [1].

7.1.103.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

7.1.104 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:384 DL: 128kbps / PS RAB + UL:3.4 DL:3.4 kbps Signalling Radio Bearers for DCCH

The minimum UE classes supporting this combination are UL: 384kbps, DL: 128kbps. The minimum UE class to support the alternative UL physical configuration 2 is UL: 384kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 32.

7.1.104.1 Uplink

7.1.104.1.1 Transport channel parameters

7.1.104.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.104.1.1.1 Transport channel parameters for Interactive or background / UL:384 kbps / PS RAB

See subclause 6.10.2.4.1.34.1.1.1 of [1].

7.1.104.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.104.1.1.3 TFCS

See subclause 6.10.2.4.5.3.1.1.4 of [1].

7.1.104.1.2 Physical channel parameters

See subclause 6.10.2.4.5.3.1.2 of [1].

7.1.104.2 Downlink

7.1.104.2.1 Transport channel parameters

7.1.104.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.104.2.1.2 Transport channel parameters for Interactive or background / DL:128 kbps / PS RAB

See subclause 6.10.2.4.1.27.2.1.1 of [1].

7.1.104.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1. of [1].

7.1.104.2.1.4 TFCS

See subclause 6.10.2.4.1.41.2.1.4 of [1].

7.1.104.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		16
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

**7.1.105 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:384 DL: 384kbps / PS RAB + UL:3.4
DL:3.4 kbps Signalling Radio Bearers for DCCH**

The minimum UE classes supporting this combination are UL: 384kbps, DL: 384kbps. The minimum UE class to support the alternative UL physical configuration 2 is UL: 384kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 32.

7.1.105.1 Uplink

7.1.105.1.1 Transport channel parameters

7.1.105.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.105.1.1.2 Transport channel parameters for Interactive or background / UL:384 kbps / PS RAB

See subclause 6.10.2.4.1.34.1.1.1 of [1].

7.1.105.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.105.1.1.3 TFCS

See subclause 6.10.2.4.5.3.1.1.4 of [1].

7.1.105.1.2 Physical channel parameters

See subclause 6.10.2.4.5.3.1.2 of [1].

7.1.105.2 Downlink

7.1.105.2.1 Transport channel parameters

7.1.105.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1].

7.1.105.2.1.2 Transport channel parameters for Interactive or background / DL:384 kbps / PS RAB

See subclause 6.10.2.4.1.32.2.1.1 of [1].

7.1.105.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1. of [1].

7.1.105.2.1.4 TFCS

See subclause 6.10.2.4.1.43.2.1.4. of [1].

7.1.105.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	8
	Number of DPDCH	1
DPCCH	Number of TFCI bits/slot	8
	Number of TPC bits/slot	8
	Number of Pilot bits/slot	16
DPDCH	Number of data bits/slot	608
	Number of data bits/frame	9120

7.1.106 Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6)
kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 12 kbps.

This is supported in Release 5.

7.1.106.1 Uplink

7.1.106.1.1 Transport channel parameters

7.1.106.1.1.1 Transport channel parameters for Conversational / speech / UL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.1.1.1 of [1].

7.1.106.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.106.1.1.3 TFCS

TFCS size	10
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH)= (TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0), (TF2,TF1,TF0,TF0), (TF3,TF2,TF0,TF0), (TF4,TF3,TF0,TF0), (TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF1), (TF2,TF1,TF0,TF1), (TF3,TF2,TF0,TF1), (TF4,TF3,TF0,TF1)

7.1.106.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	64
	Max number of DPDCH data bits/radio frame	600
	Puncturing Limit	0.84

7.1.106.2 Downlink

7.1.106.2.1 Transport channel parameters

7.1.106.2.1.1 Transport channel parameters for Conversational / speech / DL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.1.1.1 of [1].

7.1.106.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.106.2.1.3 TFCS

TFCS size	10
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH)= (TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0), (TF2,TF1,TF0,TF0), (TF3,TF2,TF0,TF0), (TF4,TF3,TF0,TF0), (TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF1), (TF2,TF1,TF0,TF1), (TF3,TF2,TF0,TF1), (TF4,TF3,TF0,TF1)

7.1.106.2.2 Physical channel parameters

DPCH Downlink	DTX position	Fixed	
	Spreading factor	128	
	DPCCH	Number of TFCI bits/slot	0
	DPDCH	Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
		Number of data bits/slot	34
		Number of data bits/frame	510

7.1.107 Conversational / speech / UL:(15.85 12.65 8.85 6.6) DL:(15.85 12.65 8.85 6.6) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release 5.

7.1.107.1 Uplink

7.1.107.1.1 Transport channel parameters

7.1.107.1.1.1 Transport channel parameters for Conversational / speech / UL: (15.85 12.65 8.85 6.6) kbps / CS RAB

Higher Layer	RAB/Signalling RB	RAB subflow #1	RAB subflow #2	RAB subflow #3 (note 2)
RLC	Logical channel type	DTCH		
	RLC mode	TM	TM	TM
	Payload sizes, bit	40, 54, 64, 72 (alt. 0, 40, 54, 64, 72)	78, 113, 181, 245	60
	Max data rate, bps	15 850		
	TrD PDU header, bit	0		
MAC	MAC header, bit	0		
	MAC multiplexing	N/A		
Layer 1	TrCH type	DCH	DCH	DCH
	TB sizes, bit	40, 54, 64, 72 (alt. 0, 40, 54, 64, 72)	78, 113, 181, 245	60
	TFS	TF0, bits	0x72(alternative 1x0) (note)	0x245
		TF1, bits	1x40	1x78
		TF2 bits	1x54	1x113
		TF3, bits	1x64	1x181
		TF4, bits	1x72	1x245
	TTI, ms	20	20	20
	Coding type	CC 1/3	CC 1/3	CC 1/3
	CRC, bit	12	N/A	N/A
	Max number of bits/TTI after channel coding	276	759	0
	Uplink: Max number of bits/radio frame before rate matching	138	380	0
	RM attribute	180-220	170-210	256
	NOTE 1:	In case of using this alternative, CRC parity bits are to be attached to RAB subflow#1 any time since number of TrBLks are 1 even if there is no data on RAB subflow#1 (see subclause 4.2.1.1 in TS 25.212).		
	NOTE 2:	RAB subflow #3 does not exist in Iu interface. UTRAN establishes this additional "dummy" subflow when the RAB for Wideband AMR is assigned.		

7.1.107.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.107.1.1.3 TFCS

TFCS size	12
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH)= (TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0), (TF2,TF1,TF0,TF0), (TF3,TF2,TF0,TF0), (TF4,TF3,TF0,TF0), (TF4,TF4,TF0,TF0), (TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF1), (TF2,TF1,TF0,TF1), (TF3,TF2,TF0,TF1), (TF4,TF3,TF0,TF1), (TF4,TF4,TF0,TF1)

7.1.107.1.2 Physical channel parameters

DPCCH Uplink	Min spreading factor	64
	Max number of DPDCH data bits/radio frame	600
	Puncturing Limit	0.76

7.1.107.2 Downlink

7.1.107.2.1 Transport channel parameters

7.1.107.2.1.1 Transport channel parameters for Conversational / speech / DL: (15.85 12.65 8.85 6.6) kbps / CS RAB

Higher Layer	RAB/Signalling RB	RAB subflow #1	RAB subflow #2	RAB subflow #3 (note 3)
RLC	Logical channel type	DTCH		
	RLC mode	TM	TM	TM
	Payload sizes, bit	0, 40, 54, 64, 72	78, 113, 181, 245	60
	Max data rate, bps	15 850		
	TrB PDU header, bit	0		
MAC	MAC header, bit	0		
	MAC multiplexing	N/A		
Layer 1	TrCH type	DCH	DCH	DCH
	TB sizes, bit	0, 40, 54, 64, 72	78, 113, 181, 245	60
	TFS (note 1)	TF0, bits	1x0 (note 2)	0x245
		TF1, bits	1x40	1x78
		TF2, bits	1x54	1x113
		TF3, bits	1x64	1x181
		TF4, bits	1x72	1x245
	TTI, ms	20	20	20
	Coding type	CC 1/3	CC 1/3	CC 1/3
	CRC, bit	12	N/A	N/A
	Max number of bits/TTI after channel coding	276	759	0
	RM attribute	180-220	170-210	256

NOTE 1: The TrCH corresponding to RAB subflow #1 should be used as the guiding TrCH, (see subclause 4.3 in TS 25.212).

NOTE 2: CRC parity bits are to be attached to RAB subflow#1 any time since number of TrBlks are 1 even if there is no data on RAB subflow#1 (see subclause 4.2.1.1 in TS 25.212).

NOTE 3: RAB subflow #3 does not exist in Iu interface. UTRAN establishes this additional "dummy" subflow when the RAB for Wideband AMR is assigned.

7.1.107.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.107.2.1.3 TFCS

TFCS size	12
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH)= (TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0), (TF2,TF1,TF0,TF0), (TF3,TF2,TF0,TF0), (TF4,TF3,TF0,TF0), (TF4,TF4,TF0,TF0), (TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF1), (TF2,TF1,TF0,TF1), (TF3,TF2,TF0,TF1), (TF4,TF3,TF0,TF1), (TF4,TF4,TF0,TF1)

7.1.107.2.2 Physical channel parameters

DPCH Downlink	DTX position	Fixed	
	Spreading factor	128	
	DPCCH	Number of TFCI bits/slot	0
		Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot	34
		Number of data bits/frame	510

7.1.108 Conversational / speech / UL:(23.85 12.65 8.85 6.6) DL:(23.85 12.65 8.85 6.6) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release 5.

7.1.108.1 Uplink

7.1.108.1.1 Transport channel parameters

7.1.108.1.1.1 Transport channel parameters for Conversational / speech / UL: (23.85 12.65 8.85 6.6) kbps / CS RAB

Higher Layer	RAB/Signalling RB		RAB subflow #1	RAB subflow #2	RAB subflow #3 (note 2)
RLC	Logical channel type		DTCH		
	RLC mode		TM	TM	TM
	Payload sizes, bit		40, 54, 64, 72 (alt. 0, 40, 54, 64, 72)	78, 113, 181, 405	60
	Max data rate, bps		23 850		
	TrD PDU header, bit		0		
MAC	MAC header, bit		0		
	MAC multiplexing		N/A		
Layer 1	TrCH type		DCH	DCH	DCH
	TB sizes, bit		40, 54, 64, 72 (alt. 0, 40, 54, 64, 72)	78, 113, 181, 405	60
	TFS	TF0, bits	0x72(alternative 1x0) (note)	0x405	0x60
		TF1, bits	1x40	1x78	N/A
		TF2 bits	1x54	1x113	N/A
		TF3, bits	1x64	1x181	N/A
		TF4, bits	1x72	1x405	N/A
	TTI, ms		20	20	20
	Coding type		CC 1/3	CC 1/3	CC 1/3
	CRC, bit		12	N/A	N/A
	Max number of bits/TTI after channel coding		276	1239	0
	Uplink: Max number of bits/radio frame before rate matching		138	620	0
	RM attribute		180-220	170-210	256

NOTE 1: In case of using this alternative, CRC parity bits are to be attached to RAB subflow#1 any time since number of TrBlks are 1 even if there is no data on RAB subflow#1 (see subclause 4.2.1.1 in TS 25.212).

NOTE 2: RAB subflow #3 does not exist in Iu interface. UTRAN establishes this additional "dummy" subflow when the RAB for Wideband AMR is assigned.

7.1.108.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1 of [1].

7.1.108.1.1.3 TFCS

TFCS size	12
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH)= (TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0), (TF2,TF1,TF0,TF0), (TF3,TF2,TF0,TF0), (TF4,TF3,TF0,TF0), (TF4,TF4,TF0,TF0), (TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF1), (TF2,TF1,TF0,TF1), (TF3,TF2,TF0,TF1), (TF4,TF3,TF0,TF1), (TF4,TF4,TF0,TF1)

7.1.108.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	1

7.1.108.2 Downlink

7.1.108.2.1 Transport channel parameters

7.1.108.2.1.1 Transport channel parameters for Conversational / speech / DL: (23.85 12.65 8.85 6.6) kbps / CS RAB

Higher Layer	RAB/Signalling RB	RAB subflow #1	RAB subflow #2	RAB subflow #3 (note 3)
RLC	Logical channel type		DTCH	
	RLC mode	TM	TM	TM
	Payload sizes, bit	0, 40, 54, 64, 72	78, 113, 181, 405	60
	Max data rate, bps		23 850	
	TrD PDU header, bit		0	
MAC	MAC header, bit		0	
	MAC multiplexing		N/A	
Layer 1	TrCH type	DCH	DCH	DCH
	TB sizes, bit	0, 40, 54, 64, 72	78, 113, 181, 405	60
	TFS (note 1)	TF0, bits	1x0 (note 2)	0x405
		TF1, bits	1x40	1x78
		TF2, bits	1x54	1x113
		TF3, bits	1x64	1x181
		TF4, bits	1x72	1x405
	TTI, ms	20	20	20
	Coding type	CC 1/3	CC 1/3	CC 1/3
	CRC, bit	12	N/A	N/A
	Max number of bits/TTI after channel coding	276	1239	0
	RM attribute	180-220	170-210	256

NOTE 1: The TrCH corresponding to RAB subflow #1 should be used as the guiding TrCH, (see subclause 4.3 in TS 25.212).

NOTE 2: CRC parity bits are to be attached to RAB subflow#1 any time since number of TrBlks are 1 even if there is no data on RAB subflow#1 (see subclause 4.2.1.1 in TS 25.212).

NOTE 3: RAB subflow #3 does not exist in Iu interface. UTRAN establishes this additional "dummy" subflow when the RAB for Wideband AMR is assigned.

7.1.108.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.108.2.1.3 TFCS

TFCS size	12
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, DCCH)= (TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0), (TF2,TF1,TF0,TF0), (TF3,TF2,TF0,TF0), (TF4,TF3,TF0,TF0), (TF4,TF4,TF0,TF0), (TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF1), (TF2,TF1,TF0,TF1), (TF3,TF2,TF0,TF1), (TF4,TF3,TF0,TF1), (TF4,TF4,TF0,TF1)

7.1.108.2.2 Physical channel parameters

DPCH Downlink	DTX position	Fixed	
	Spreading factor	64	
	DPCCH	Number of TFCI bits/slot	0
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.109 Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6)
kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS
RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5
for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 'Maximum number of TFC' = 64, DL: 64 kbps plus support for 'Maximum number of TFC' = 128.

This is supported in Release 5.

7.1.109.1 Uplink

7.1.109.1.1 Transport channel parameters

7.1.109.1.1.1 Transport channel parameters for Conversational / speech / UL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.1.1.1 of [1].

7.1.109.1.1.2 Transport channel parameters for Interactive or background / UL:64 kbps / PS RAB

See subclause 6.10.2.4.1.26.1.1.1 of [1].

7.1.109.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.109.1.1.4

TFCS

TFCS size	50
TFCS	(RAB subflow#1, RAB subflow#2,RAB subflow#3, 64 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF3,TF2,TF0,TF0,TF0), (TF4,TF3,TF0,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF1), (TF4,TF3,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF0,TF1,TF0), (TF3,TF2,TF0,TF1,TF0), (TF4,TF3,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF0,TF1,TF1), (TF3,TF2,TF0,TF1,TF1), (TF4,TF3,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF0,TF2,TF0), (TF3,TF2,TF0,TF2,TF0), (TF4,TF3,TF0,TF2,TF0), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF0,TF2,TF1), (TF3,TF2,TF0,TF2,TF1), (TF4,TF3,TF0,TF2,TF1), (TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF3,TF0), (TF2,TF1,TF0,TF3,TF0), (TF3,TF2,TF0,TF3,TF0), (TF4,TF3,TF0,TF3,TF0), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1), (TF2,TF1,TF0,TF3,TF1), (TF3,TF2,TF0,TF3,TF1), (TF4,TF3,TF0,TF3,TF1), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0), (TF2,TF1,TF0,TF4,TF0), (TF3,TF2,TF0,TF4,TF0), (TF4,TF3,TF0,TF4,TF0), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1), (TF2,TF1,TF0,TF4,TF1), (TF3,TF2,TF0,TF4,TF1), (TF4,TF3,TF0,TF4,TF1)

7.1.109.1.1.5

TFC subset list

$\{(TF3,TF2,TF0,TF4,TF1), (TF4,TF3,TF0,TF4,TF1)\}$
--

7.1.109.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.76

7.1.109.2 Downlink

7.1.109.2.1 Transport channel parameters

7.1.109.2.1.1 Transport channel parameters for Conversational / speech / DL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.2.1.1 of [1].

7.1.109.2.1.2 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.25.2.1.1 of [1].

7.1.109.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.109.2.1.4 Transport channel parameters for DL:0.15 kbps SRB#5 for DCCH

See subclause 6.10.2.4.1.62.2.1.3 of [1].

7.1.109.2.1.5

TFCS

7.1.109.2.2

Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		32
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

7.1.110 Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6)
kbps / CS RAB + Interactive or background / UL:64 DL:128 kbps /
PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps
SRB#5 for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 'Maximum number of TFC' = 64, DL: 128 kbps plus support for 'Maximum number of TFC' = 128.

This is supported in Release 5.

7.1.110.1 Uplink

7.1.110.1.1 Transport channel parameters

7.1.110.1.1.1 Transport channel parameters for Conversational / speech / UL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.1.1.1 of [1].

7.1.110.1.1.2 Transport channel parameters for Interactive or background / UL:64 kbps / PS RAB

See subclause 6.10.2.4.1.26.1.1.1 of [1].

7.1.110.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.110.1.1.4 TFCS

See subclause 7.1.109.1.1.4.

7.1.110.1.1.5 TFC subset list

See subclause 7.1.109.1.1.5.

7.1.110.1.2 Physical channel parameters

See subclause 7.1.109.1.2.

7.1.110.2 Downlink

7.1.110.2.1 Transport channel parameters

7.1.110.2.1.1 Transport channel parameters for Conversational / speech / DL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.2.1.1 of [1].

7.1.110.2.1.2 Transport channel parameters for Interactive or background / DL:128 kbps / PS RAB

See subclause 6.10.2.4.1.27.2.1.1 of [1].

7.1.110.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.110.2.1.4 Transport channel parameters for DL:0.15 kbps SRB#5 for DCCH

See subclause 6.10.2.4.1.62.2.1.3 of [1].

7.1.110.2.1.5

TFCS

7.1.110.2.2

Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		16
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	288
		Number of data bits/frame	4320

7.1.111 Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6)
kbps / CS RAB + Interactive or background / UL:64 DL:384 kbps /
PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps
SRB#5 for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 'Maximum number of TFC' = 64, DL: 384 kbps.

This is supported in Release 5.

7.1.111.1 Uplink

7.1.111.1.1 Transport channel parameters

7.1.111.1.1.1 Transport channel parameters for Conversational / speech / UL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.1.1.1 of [1].

7.1.111.1.1.2 Transport channel parameters for Interactive or background / UL:64 kbps / PS RAB

See subclause 6.10.2.4.1.26.1.1.1 of [1].

7.1.111.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.111.1.1.4 TFCS

See subclause 7.1.109.1.1.4.

7.1.111.1.1.5 TFC subset list

TFC subset list size	3
TFC subset list	$0 = \{(TF0, TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0, TF0), (TF2, TF1, TF0, TF0, TF0),$ $(TF0, TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF0, TF1), (TF2, TF1, TF0, TF0, TF1),$ $(TF0, TF0, TF0, TF1, TF0), (TF1, TF0, TF0, TF1, TF0), (TF2, TF1, TF0, TF1, TF0),$ $(TF0, TF0, TF0, TF1, TF1), (TF1, TF0, TF0, TF1, TF1), (TF2, TF1, TF0, TF1, TF1),$ $(TF0, TF0, TF0, TF2, TF0), (TF1, TF0, TF0, TF2, TF0), (TF2, TF1, TF0, TF2, TF0),$ $(TF0, TF0, TF0, TF2, TF1), (TF1, TF0, TF0, TF2, TF1), (TF2, TF1, TF0, TF2, TF1),$ $(TF0, TF0, TF0, TF3, TF0), (TF1, TF0, TF0, TF3, TF0), (TF2, TF1, TF0, TF3, TF0),$ $(TF0, TF0, TF0, TF3, TF1), (TF1, TF0, TF0, TF3, TF1), (TF2, TF1, TF0, TF3, TF1),$ $(TF0, TF0, TF0, TF4, TF0), (TF1, TF0, TF0, TF4, TF0), (TF2, TF1, TF0, TF4, TF0),$ $(TF0, TF0, TF0, TF4, TF1), (TF1, TF0, TF0, TF4, TF1), (TF2, TF1, TF0, TF4, TF1),$ $(TF0, TF0, TF0, TF5, TF0), (TF1, TF0, TF0, TF5, TF0), (TF2, TF1, TF0, TF5, TF0),$ $(TF0, TF0, TF0, TF5, TF1), (TF1, TF0, TF0, TF5, TF1), (TF2, TF1, TF0, TF5, TF1)\},$ $1 = \{(TF0, TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0, TF0), (TF2, TF1, TF0, TF0, TF0),$ $(TF3, TF2, TF0, TF0, TF0), (TF0, TF0, TF0, TF0, TF1), (TF1, TF0, TF0, TF0, TF1),$ $(TF2, TF1, TF0, TF0, TF1), (TF3, TF2, TF0, TF0, TF1), (TF0, TF0, TF0, TF1, TF0),$ $(TF1, TF0, TF0, TF1, TF0), (TF2, TF1, TF0, TF1, TF0), (TF3, TF2, TF0, TF1, TF0),$ $(TF0, TF0, TF0, TF1, TF1), (TF1, TF0, TF0, TF1, TF1), (TF2, TF1, TF0, TF1, TF1),$ $(TF3, TF2, TF0, TF1, TF1), (TF0, TF0, TF0, TF2, TF0), (TF1, TF0, TF0, TF2, TF0),$ $(TF2, TF1, TF0, TF2, TF0), (TF3, TF2, TF0, TF2, TF0), (TF0, TF0, TF0, TF2, TF1),$ $(TF1, TF0, TF0, TF2, TF1), (TF2, TF1, TF0, TF2, TF1), (TF3, TF2, TF0, TF2, TF1),$ $(TF0, TF0, TF0, TF3, TF0), (TF1, TF0, TF0, TF3, TF0), (TF2, TF1, TF0, TF3, TF0),$ $(TF3, TF2, TF0, TF3, TF0), (TF0, TF0, TF0, TF3, TF1), (TF1, TF0, TF0, TF3, TF1),$ $(TF2, TF1, TF0, TF3, TF1), (TF3, TF2, TF0, TF3, TF1), (TF0, TF0, TF0, TF4, TF0),$ $(TF1, TF0, TF0, TF4, TF0), (TF2, TF1, TF0, TF4, TF0), (TF3, TF2, TF0, TF4, TF0),$ $(TF0, TF0, TF0, TF4, TF1), (TF1, TF0, TF0, TF4, TF1), (TF2, TF1, TF0, TF4, TF1),$ $(TF3, TF2, TF0, TF4, TF1), (TF0, TF0, TF0, TF5, TF0), (TF1, TF0, TF0, TF5, TF0),$ $(TF2, TF1, TF0, TF5, TF0), (TF3, TF2, TF0, TF5, TF0), (TF0, TF0, TF0, TF5, TF1),$ $(TF1, TF0, TF0, TF5, TF1), (TF2, TF1, TF0, TF5, TF1), (TF3, TF2, TF0, TF5, TF1)\},$ $2 = \{(TF0, TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0, TF0), (TF2, TF1, TF0, TF0, TF0),$ $(TF3, TF2, TF0, TF0, TF0), (TF4, TF3, TF0, TF0, TF0), (TF0, TF0, TF0, TF0, TF1),$ $(TF1, TF0, TF0, TF0, TF1), (TF2, TF1, TF0, TF0, TF1), (TF3, TF2, TF0, TF0, TF1),$ $(TF4, TF3, TF0, TF0, TF1), (TF0, TF0, TF0, TF1, TF0), (TF1, TF0, TF0, TF1, TF0),$ $(TF2, TF1, TF0, TF1, TF0), (TF3, TF2, TF0, TF1, TF0), (TF4, TF3, TF0, TF1, TF0),$ $(TF0, TF0, TF0, TF1, TF1), (TF1, TF0, TF0, TF1, TF1), (TF2, TF1, TF0, TF1, TF1),$ $(TF3, TF2, TF0, TF1, TF1), (TF4, TF3, TF0, TF1, TF1), (TF0, TF0, TF0, TF2, TF0),$ $(TF1, TF0, TF0, TF2, TF0), (TF2, TF1, TF0, TF2, TF0), (TF3, TF2, TF0, TF2, TF0),$ $(TF4, TF3, TF0, TF2, TF0), (TF0, TF0, TF0, TF2, TF1), (TF1, TF0, TF0, TF2, TF1),$ $(TF2, TF1, TF0, TF2, TF1), (TF3, TF2, TF0, TF2, TF1), (TF4, TF3, TF0, TF2, TF1),$ $(TF0, TF0, TF0, TF3, TF0), (TF1, TF0, TF0, TF3, TF0), (TF2, TF1, TF0, TF3, TF0)\},$

(TF3,TF2,TF0,TF3,TF0), (TF4,TF3,TF0,TF3,TF0), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1), (TF2,TF1,TF0,TF3,TF1), (TF3,TF2,TF0,TF3,TF1), (TF4,TF3,TF0,TF3,TF1), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0), (TF2,TF1,TF0,TF4,TF0), (TF3,TF2,TF0,TF4,TF0), (TF4,TF3,TF0,TF4,TF0), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1), (TF2,TF1,TF0,TF4,TF1), (TF3,TF2,TF0,TF4,TF1), (TF4,TF3,TF0,TF4,TF1), (TF0,TF0,TF0,TF5,TF0), (TF1,TF0,TF0,TF5,TF0), (TF2,TF1,TF0,TF5,TF0), (TF3,TF2,TF0,TF5,TF0), (TF4,TF3,TF0,TF5,TF0), (TF0,TF0,TF0,TF5,TF1), (TF1,TF0,TF0,TF5,TF1), (TF2,TF1,TF0,TF5,TF1), (TF3,TF2,TF0,TF5,TF1), (TF4,TF3,TF0,TF5,TF1)}
--

7.1.111.1.2 Physical channel parameters

See subclause 7.1.109.1.2.

7.1.111.2 Downlink

7.1.111.2.1 Transport channel parameters

7.1.111.2.1.1 Transport channel parameters for Conversational / speech / DL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.2.1.1 of [1].

7.1.111.2.1.2 Transport channel parameters for Interactive or background / DL:384 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320
	Max data rate, bps	384 000
	AMD PDU header, bit	16
	MAC header, bit	0
MAC	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	336
	TFS	0x336
	TF0, bits	1x336
	TF1, bits	2x336
	TF2, bits	4x336
	TF3, bits	8x336
	TF4, bits	12x336
	TTI, ms	10
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	12684
	RM attribute	110 to 150

7.1.111.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.111.2.1.4 Transport channel parameters for DL:0.15 kbps SRB#5 for DCCH

See subclause 6.10.2.4.1.62.2.1.3 of [1].

7.1.111.2.1.5 TFCS

TFCS size	120
TFCS	((RAB subflow#1, RAB subflow#2, RAB subflow#3, 384 kbps RAB, DCCH, DCCH 0.15)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0,TF0), (TF3,TF2,TF0,TF0,TF0,TF0), (TF4,TF3,TF0,TF0,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF0,TF0,TF1,TF0), (TF3,TF2,TF0,TF0,TF1,TF0), (TF4,TF3,TF0,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF0,TF1,TF0,TF0), (TF3,TF2,TF0,TF1,TF0,TF0), (TF4,TF3,TF0,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF0,TF1,TF1,TF0), (TF3,TF2,TF0,TF1,TF1,TF0), (TF4,TF3,TF0,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF0,TF2,TF0,TF0), (TF3,TF2,TF0,TF2,TF0,TF0), (TF4,TF3,TF0,TF2,TF0,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF0,TF2,TF1,TF0), (TF3,TF2,TF0,TF2,TF1,TF0), (TF4,TF3,TF0,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF0,TF3,TF0,TF0), (TF3,TF2,TF0,TF3,TF0,TF0), (TF4,TF3,TF0,TF3,TF0,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF0,TF3,TF1,TF0), (TF3,TF2,TF0,TF3,TF1,TF0), (TF4,TF3,TF0,TF3,TF1,TF0), (TF0,TF0,TF0,TF4,TF0,TF0), (TF1,TF0,TF0,TF4,TF0,TF0), (TF2,TF1,TF0,TF4,TF0,TF0), (TF3,TF2,TF0,TF4,TF0,TF0), (TF4,TF3,TF0,TF4,TF0,TF0), (TF0,TF0,TF0,TF4,TF1,TF0), (TF1,TF0,TF0,TF4,TF1,TF0), (TF2,TF1,TF0,TF4,TF1,TF0), (TF3,TF2,TF0,TF4,TF1,TF0), (TF4,TF3,TF0,TF4,TF1,TF0), (TF0,TF0,TF0,TF5,TF0,TF0), (TF1,TF0,TF0,TF5,TF0,TF0), (TF2,TF1,TF0,TF5,TF0,TF0), (TF3,TF2,TF0,TF5,TF0,TF0), (TF4,TF3,TF0,TF5,TF0,TF0), (TF0,TF0,TF0,TF5,TF1,TF0), (TF1,TF0,TF0,TF5,TF1,TF0), (TF2,TF1,TF0,TF5,TF1,TF0), (TF3,TF2,TF0,TF5,TF1,TF0), (TF4,TF3,TF0,TF5,TF1,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF0,TF0,TF1,TF0), (TF3,TF2,TF0,TF0,TF1,TF0), (TF4,TF3,TF0,TF0,TF1,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF0,TF0,TF1,TF0), (TF3,TF2,TF0,TF0,TF1,TF0), (TF4,TF3,TF0,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF0,TF1,TF0,TF1), (TF3,TF2,TF0,TF1,TF0,TF1), (TF4,TF3,TF0,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF0,TF1,TF1,TF0), (TF3,TF2,TF0,TF1,TF1,TF0), (TF4,TF3,TF0,TF1,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF0,TF1,TF1,TF0), (TF3,TF2,TF0,TF1,TF1,TF0), (TF4,TF3,TF0,TF1,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF0,TF1,TF1,TF0), (TF3,TF2,TF0,TF1,TF1,TF0), (TF4,TF3,TF0,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF0,TF2,TF1,TF0), (TF3,TF2,TF0,TF2,TF1,TF0), (TF4,TF3,TF0,TF2,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF0,TF2,TF1,TF0), (TF3,TF2,TF0,TF2,TF1,TF0), (TF4,TF3,TF0,TF2,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF0,TF2,TF1,TF0), (TF3,TF2,TF0,TF2,TF1,TF0), (TF4,TF3,TF0,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF0,TF3,TF1,TF0), (TF3,TF2,TF0,TF3,TF1,TF0), (TF4,TF3,TF0,TF3,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF0,TF3,TF1,TF0), (TF3,TF2,TF0,TF3,TF1,TF0), (TF4,TF3,TF0,TF3,TF1,TF0), (TF0,TF0,TF0,TF4,TF1,TF0), (TF1,TF0,TF0,TF4,TF1,TF0), (TF2,TF1,TF0,TF4,TF1,TF0), (TF3,TF2,TF0,TF4,TF1,TF0), (TF4,TF3,TF0,TF4,TF1,TF0), (TF0,TF0,TF0,TF4,TF1,TF0), (TF1,TF0,TF0,TF4,TF1,TF0), (TF2,TF1,TF0,TF4,TF1,TF0), (TF3,TF2,TF0,TF4,TF1,TF0), (TF4,TF3,TF0,TF4,TF1,TF0), (TF0,TF0,TF0,TF5,TF1,TF0), (TF1,TF0,TF0,TF5,TF1,TF0), (TF2,TF1,TF0,TF5,TF1,TF0), (TF3,TF2,TF0,TF5,TF1,TF0), (TF4,TF3,TF0,TF5,TF1,TF0), (TF0,TF0,TF0,TF5,TF1,TF0), (TF1,TF0,TF0,TF5,TF1,TF0), (TF2,TF1,TF0,TF5,TF1,TF0), (TF3,TF2,TF0,TF5,TF1,TF0), (TF4,TF3,TF0,TF5,TF1,TF0), (TF0,TF0,TF0,TF5,TF1,TF0), (TF1,TF0,TF0,TF5,TF1,TF0), (TF2,TF1,TF0,TF5,TF1,TF0), (TF3,TF2,TF0,TF5,TF1,TF0), (TF4,TF3,TF0,TF5,TF1,TF0))

7.1.111.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible	
	Spreading factor	8	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	8
		Number of Pilot bits/slot	16
	DPDCH	Number of data bits/slot	608
		Number of data bits/frame	9120

7.1.112 Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps.

This is supported in Release 5.

7.1.112.1 Uplink

7.1.112.1.1 Transport channel parameters

7.1.112.1.1.1 Transport channel parameters for Conversational / speech / UL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.1.1.1 of [1].

7.1.112.1.1.2 Transport channel parameters for Interactive or background / UL:0 kbps / PS RAB

See subclause 6.10.2.4.1.38a.1.1.2 of [1].

7.1.112.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.112.1.1.4 TFCS

TFCS size	10
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF3,TF2,TF0,TF0,TF0), (TF4,TF3,TF0,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF1), (TF4,TF3,TF0,TF0,TF1)

7.1.112.1.1.5 TFC subset list

TFC subset list size	3
TFC subset list	0 = {(TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1)}, 1 = {(TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF3,TF2,TF0,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF1)}, 2 = {(TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF3,TF2,TF0,TF0,TF0), (TF4,TF3,TF0,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF1), (TF4,TF3,TF0,TF0,TF1)}

7.1.112.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	64
	Max number of DPDCH data bits/radio frame	600
	Puncturing Limit	0.68

7.1.112.2 Downlink

7.1.112.2.1 Transport channel parameters

7.1.112.2.1.1 Transport channel parameters for Conversational / speech / DL: (12.65 8.85 6.6) kbps / CS RAB

See subclause 6.10.2.4.1.62.2.1.1 of [1].

7.1.112.2.1.2 Transport channel parameters for Interactive or background / DL:0 kbps / PS RAB

See subclause 6.10.2.4.1.38a.2.1 of [1].

7.1.112.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.112.2.1.4 Transport channel parameters for DL:0.15 kbps SRB#5 for DCCH

See subclause 6.10.2.4.1.62.2.1.3 of [1].

7.1.112.2.1.5 TFCS

TFCS size	20
TFCS	(RAB subflow#1, RAB subflow#2, 0 kbps RAB, DCCH 3.4, DCCH 0.15)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF3,TF2,TF0,TF0,TF0), (TF4,TF3,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF1,TF0), (TF4,TF3,TF0,TF0,TF1), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF1), (TF4,TF3,TF0,TF0,TF1), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF1), (TF4,TF3,TF0,TF0,TF1)

7.1.112.2.2 Physical channel parameters

See subclause 6.10.2.4.1.62.2.2 of [1].

7.1.113 Conversational / speech / UL:12.2 DL:12.2 kbps + Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in release '99.

7.1.113.1 Uplink

See subclause 7.1.95.1

7.1.113.2 Downlink

7.1.113.2.1 Transport channel parameters

7.1.113.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1]

7.1.113.2.1.2 Transport channel parameters for Streaming / unknown / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.58.2.1.1 of [1].

7.1.113.2.1.3 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.113.2.1.4 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.113.2.1.5 TFCS

TFCS size	48
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF2,TF1,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF1,TF3,TF1,TF1)

7.1.113.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	32	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

7.1.113 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Streaming / unknown / UL:64 DL:16 kbps / PS RAB + Interactive or
background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs
for DCCH

The minimum UE classes supporting this combination are UL: 128 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16 and 'Maximum number of TFC' = 64, DL: 64 kbps.

This is supported in release '99.

7.1.113.1 Uplink

7.1.113.1.1 Transport channel parameters

7.1.113.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1]

7.1.113.1.1.2 Transport channel parameters for Streaming / unknown / UL:64 kbps / PS RAB

See subclause 7.4.15.1.1.1

7.1.113.1.1.3 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1].

7.1.113.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.113.1.1.5 TFCS

TFCS size	60
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF4,TF0,TF0), (TF1,TF0,TF0,TF4,TF0,TF0), (TF2,TF1,TF1,TF4,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF4,TF1,TF0), (TF1,TF0,TF0,TF4,TF1,TF0), (TF2,TF1,TF1,TF4,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF4,TF0,TF1), (TF1,TF0,TF0,TF4,TF0,TF1), (TF2,TF1,TF1,TF4,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF2,TF1,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF1,TF3,TF1,TF1), (TF0,TF0,TF0,TF4,TF1,TF1), (TF1,TF0,TF0,TF4,TF1,TF1), (TF2,TF1,TF1,TF4,TF1,TF1)

7.1.113.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.64

7.1.113.2 Downlink

See subclause 7.1.96.2.

7.1.114 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Streaming / unknown / UL:32 DL:256 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 'Maximum number of AM entities' = 5 and 'Maximum number of TFC' = 48, DL: 128 kbps plus support for 'Maximum total number of transport blocks received within TTIs that end within the same 10 ms interval' = 16 and 'Maximum number of physical channel bits received in any 10 ms interval (DPCH, S-CCPCH)' = 9600.

This is supported in release '99.

7.1.114.1 Uplink

7.1.114.1.1 Transport channel parameters

7.1.114.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.1.1.1 of [1].

7.1.114.1.1.2 Transport channel parameters for Streaming / unknown / UL:32 kbps / PS RAB

See subclause 7.1.83.1.1.1

7.1.114.1.1.3 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.1.1.2 of [1].

7.1.114.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.114.1.1.5 TFCS

TFCS size	36
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 32 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1)

7.1.114.1.2 Physical channel parameters

DPCN Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.96

7.1.114.2 Downlink

7.1.114.2.1 Transport channel parameters

7.1.114.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.2.4.1.4.2.1.1 of [1]

7.1.114.2.1.2 Transport channel parameters for Streaming / unknown / DL:256 kbps / PS RAB

See subclause 7.1.83.2.1.1

7.1.114.2.1.3 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.38b.2.1.2 of [1]

7.1.114.2.1.4 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.114.2.1.5 TFCS

TFCS size	60
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 256 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF4,TF0,TF0), (TF1,TF0,TF0,TF4,TF0,TF0), (TF2,TF1,TF1,TF4,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF4,TF1,TF0), (TF1,TF0,TF0,TF4,TF1,TF0), (TF2,TF1,TF1,TF4,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF4,TF0,TF1), (TF1,TF0,TF0,TF4,TF0,TF1), (TF2,TF1,TF1,TF4,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF2,TF1,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF1,TF3,TF1,TF1), (TF0,TF0,TF0,TF4,TF1,TF1), (TF1,TF0,TF0,TF4,TF1,TF1), (TF2,TF1,TF1,TF4,TF1,TF1)

7.1.114.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed
	Spreading factor	8
	DPCCH	Number of TFCI bits/slot
		8
		Number of TPC bits/slot
		8
DPDCH	Number of Pilot bits/slot	16
	Number of data bits/slot	608
	Number of data bits/frame	9120

7.1.115 Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB+ UL:3.4 DL: 3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release "99.

7.1.115.1 Uplink

7.1.115.1.1 Transport channel parameters

7.1.115.1.1.1 Transport channel parameters for Conversational / speech / UL:5.9 kbps / CS RAB

See subclause 6.10.2.4.1.9.1.1.1 of [1].

7.1.115.1.1.2 Transport channel parameters for Interactive or background / UL:64 kbps / PS RAB

See subclause 6.10.2.4.1.26.1.1.1 of [1].

7.1.115.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.115.1.1.4 TFCS

TFCS size	30
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF3,TF0), (TF2,TF1,TF0,TF3,TF0), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0), (TF2,TF1,TF0,TF4,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF0,TF2,TF1), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1), (TF2,TF1,TF0,TF3,TF1), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1), (TF2,TF1,TF0,TF4,TF1)

7.1.115.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.84

7.1.115.2 Downlink

7.1.115.2.1 Transport channel parameters

7.1.115.2.1.1 Transport channel parameters for Conversational / speech / DL: 5.9 kbps / CS RAB

See subclause 6.10.2.4.1.9.2.1.1 of [1].

7.1.115.2.1.2 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.25.2.1.1 of [1].

7.1.115.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.115.2.1.4 TFCS

TFCS size	30
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB , DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0),(TF2,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0),(TF2,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0),(TF2,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF3,TF0),(TF2,TF1,TF0,TF3,TF0), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0),(TF2,TF1,TF0,TF4,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1),(TF2,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1),(TF2,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1),(TF2,TF1,TF0,TF2,TF1), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1),(TF2,TF1,TF0,TF3,TF1), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1),(TF2,TF1,TF0,TF4,TF1)

7.1.115.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible or fixed
	Spreading factor		32
DPCCH	Number of TFCI bits/slot		8
	Number of TPC bits/slot		4
	Number of Pilot bits/slot		8
DPDCH	Number of data bits/slot		140
	Number of data bits/frame		2100

7.1.116 Conversational / speech / UL:5.9 kbps / CS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps plus support for 'Maximum number of AM entities' = 5, DL: 64kbps plus support for 'Maximum number of AM entities' = 5.

This is supported in Release "99.

7.1.116.1 Uplink

7.1.116.1.1 Transport channel parameters

7.1.116.1.1.1 Transport channel parameters for Conversational / speech / UL:5.9 kbps / CS RAB

See subclause 6.10.2.4.1.9.1.1.1 of [1].

7.1.116.1.1.2 Transport channel parameters for Interactive or background / UL:64 kbps / PS RAB +
UL:64 kbps / PS RAB

See subclause 6.10.2.4.1.38d.1.1.2 of [1].

7.1.116.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.116.1.1.4

TFCS

TFCS size	30
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB + 64 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0),(TF2,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0),(TF2,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0),(TF2,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF3,TF0),(TF2,TF1,TF0,TF3,TF0), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0),(TF2,TF1,TF0,TF4,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1),(TF2,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1),(TF2,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1),(TF2,TF1,TF0,TF2,TF1), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1),(TF2,TF1,TF0,TF3,TF1), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1),(TF2,TF1,TF0,TF4,TF1)

7.1.116.1.2

Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.84

7.1.116.2

Downlink

7.1.116.2.1

Transport channel parameters

7.1.116.2.1.1 Transport channel parameters for Conversational / speech / DL: 5.9 kbps / CS RAB

See subclause 6.10.2.4.1.9.2.1.1 of [1].

7.1.116.2.1.2 Transport channel parameters for Interactive or background / DL:64 kbps / PS RAB + DL:64 kbps / PS RAB

See subclause 6.10.2.4.1.38d.2.1.2 of [1].

7.1.116.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.116.2.1.4

TFCS

TFCS size	30
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB + 64 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0),(TF2,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0),(TF2,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0),(TF2,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF3,TF0),(TF2,TF1,TF0,TF3,TF0), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0),(TF2,TF1,TF0,TF4,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1),(TF2,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1),(TF2,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1),(TF2,TF1,TF0,TF2,TF1), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1),(TF2,TF1,TF0,TF3,TF1), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1),(TF2,TF1,TF0,TF4,TF1)

7.1.116.2.2

Physical channel parameters

DPCH Downlink	DTX position	Flexible or fixed	
	Spreading factor	32	
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	140
		Number of data bits/frame	2100

7.1.117 Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH

See subclause 6.10.2.4.1.4b of [1].

The minimum UE classes supporting this combination are UL: 12 kbps, DL: 32 kbps.

This is supported in Release 4.

7.1.118 Conversational / speech / UL:38.8 DL:38.8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH [Rel-6 onwards]

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release 6.

NOTE: This RAB is used for the transient state, where couple of IR packets are transmitted to synchronize contexts.

7.1.118.1 Uplink

7.1.118.1.1 Transport channel parameters

7.1.118.1.1.1 Transport channel parameters for conversational/speech/UL:38.8 kbps/ PS RAB

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	568, 624, 640, 656, 672, 704, 768, 776 (alt 0, 568, 624, 640, 656, 672, 704, 768, 776)
	Max data rate, bps	38800
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	576, 632, 648, 664, 680, 712, 776, 784 (alt 0, 576, 632, 648, 664, 680, 712, 776, 784)
	TFS TF0, bits	0x784 (alt 1x0)

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
	TF1, bits	1x576
	TF2, bits	1x632
	TF3, bits	1x648
	TF4, bits	1x664
	TF5, bits	1x680
	TF6, bits	1x712
	TF7, bits	1x776
	TF8, bits	1x784
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2412
	Uplink: Max number of bits/radio frame before rate matching	1206
	RM attribute	180-220
NOTE: Alternative 1x0 is used to have CRC present in all transport formats.		
Header compressor should ensure that small_CID is used and that CID 0 is allocated to this RAB		

7.1.118.1.1.2 Transport channel parameters for interactive or background/UL:8 kbps/ PS RAB + UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.1.1.1 of [1]

7.1.118.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1]

7.1.118.1.1.4 TFCS

TFCS size	36
TFCS	(38.8 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1)

7.1.118.1.2 Physical channel parameters

DPCP	Min spreading factor	16
Uplink	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.96

7.1.118.2 Downlink

7.1.118.2.1 Transport channel parameters

7.1.118.2.1.1 Transport channel parameters for conversational/speech/DL:38.8 kbps/ PS RAB

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	568, 624, 640, 656, 672, 704, 768, 776 (alt 0, 568, 624, 640, 656, 672, 704, 768, 776)
	Max data rate, bps	38800
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	576, 632, 648, 664, 680, 712, 776, 784 (alt 0, 576, 632, 648, 664, 680, 712, 776, 784)
TFS	TF0, bits	0x784 (alt 1x0)
	TF1, bits	1x576
	TF2, bits	1x632
	TF3, bits	1x648
	TF4, bits	1x664
	TF5, bits	1x680
	TF6, bits	1x712
	TF7, bits	1x776
	TF8, bits	1x784
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2412
	RM attribute	180-220
NOTE: Alternative 1x0 is used to have CRC present in all transport formats.		
Header compressor should ensure that small_CID is used and that CID 0 is allocated to this RAB		

- 7.1.118.2.1.2 Transport channel parameters for interactive or background/DL:8 kbps/ PS RAB + DL:
8 kbps / PS RAB

See subclause 6.10.2.4.1.56.2.1.1 of [1]

- 7.1.118.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1]

- 7.1.118.2.1.4 TFCS

TFCS size	36
TFCS	(38.8 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1)

- 7.1.118.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible	
	Spreading factor		64	
	DPCCH	Number of TFCI bits/slot		8
		Number of TPC bits/slot		4
		Number of Pilot bits/slot		8
	DPDCH	Number of data bits/slot		60
		Number of data bits/frame		900

- 7.1.119 Conversational / speech / UL:16.8 DL:16.8 kbps / PS RAB +
Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive
or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps
SRBs for DCCH [Rel-6 onwards]

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps plus support for 'Maximum number of TFC' = 96.

This is supported in Release 6.

NOTE: This RAB is used for the steady-state, where the contexts of the ROHC compressor and the ROHC decompressor are already synchronized so IR packets are not transmitted.

7.1.119.1 Uplink

7.1.119.1.1 Transport channel parameters

7.1.119.1.1.1 Transport channel parameters for conversational/speech/UL:16.8 kbps/ PS RAB

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	80, 96, 128, 136, 152, 168, 184, 200, 216, 232, 264, 280, 288, 296, 304, 328, 336 (alt 0, 80, 96, 128, 136, 152, 168, 184, 200, 216, 232, 264, 280, 288, 296, 304, 328, 336)
	Max data rate, bps	16800
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	88, 104, 136, 144, 160, 176, 192, 208, 224, 240, 272, 288, 296, 304, 312, 316, 336, 344 (alt 0, 88, 104, 136, 144, 160, 176, 192, 208, 224, 240, 272, 288, 296, 304, 312, 336, 344)
TFS	TF0, bits	0x344 (alt 1x0)
	TF1, bits	1x88
	TF2, bits	1x104
	TF3, bits	1x136
	TF4, bits	1x144
	TF5, bits	1x160
	TF6, bits	1x176
	TF7, bits	1x192
	TF8, bits	1x208
	TF9, bits	1x224
	TF10, bits	1x240
	TF11, bits	1x272
	TF12, bits	1x288
	TF13, bits	1x296
	TF14, bits	1x304
	TF15, bits	1x312
	TF16, bits	1x336
	TF17, bits	1x344

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1092
	Uplink: Max number of bits/radio frame before rate matching	546
	RM attribute	180-220
<p>NOTE: Alternative 1x0 is used to have CRC present in all transport formats.</p> <p>Header compressor should ensure that small_CID is used and that CID 0 is allocated to this RAB</p>		

7.1.119.1.1.2 Transport channel parameters for interactive or background/UL:8 kbps/ PS RAB + UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.1.1.1 of [1].

7.1.119.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.119.1.1.4 TFCS

TFCS size	72
TFCS	(16.8 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF9, TF0, TF0), (TF10, TF0, TF0), (TF11, TF0, TF0), (TF12, TF0, TF0), (TF13, TF0, TF0), (TF14, TF0, TF0), (TF15, TF0, TF0), (TF16, TF0, TF0), (TF17, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF9, TF1, TF0), (TF10, TF1, TF0), (TF11, TF1, TF0), (TF12, TF1, TF0), (TF13, TF1, TF0), (TF14, TF1, TF0), (TF15, TF1, TF0), (TF16, TF1, TF0), (TF17, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF9, TF0, TF1), (TF10, TF0, TF1), (TF11, TF0, TF1), (TF12, TF0, TF1), (TF13, TF0, TF1), (TF14, TF0, TF1), (TF15, TF0, TF1), (TF16, TF0, TF1), (TF17, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1), (TF9, TF1, TF1), (TF10, TF1, TF1), (TF11, TF1, TF1), (TF12, TF1, TF1), (TF13, TF1, TF1), (TF14, TF1, TF1), (TF15, TF1, TF1), (TF16, TF1, TF1), (TF17, TF1, TF1)

7.1.119.1.2 Physical channel parameters

DPCP	Min spreading factor	32
Uplink	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	0.88

7.1.119.2 Downlink

7.1.119.2.1 Transport channel parameters

7.1.119.2.1.1 Transport channel parameters for conversational/speech/DL:16.8 kbps/ PS RAB

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	80, 96, 128, 136, 152, 168, 184, 200, 216, 232, 264, 280, 288, 296, 304, 328, 336 (alt 0, 80, 96, 128, 136, 152, 168, 184, 200, 216, 232, 264, 280, 288, 296, 304, 328, 336)
	Max data rate, bps	16800
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	88, 104, 136, 144, 160, 176, 192, 208, 224, 240, 272, 288, 296, 304, 312, 316, 336, 344 (alt 0, 88, 104, 136, 144, 160, 176, 192, 208, 224, 240, 272, 288, 296, 304, 312, 336, 344)
TFS	TF0, bits	0x344 (alt 1x0)
	TF1, bits	1x88
	TF2, bits	1x104
	TF3, bits	1x136
	TF4, bits	1x144
	TF5, bits	1x160
	TF6, bits	1x176
	TF7, bits	1x192
	TF8, bits	1x208
	TF9, bits	1x224
	TF10, bits	1x240
	TF11, bits	1x272
	TF12, bits	1x288
	TF13, bits	1x296
	TF14, bits	1x304
	TF15, bits	1x312

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
	TF16, bits	1x336
	TF17, bits	1x344
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1092
	RM attribute	180-220
NOTE: Alternative 1x0 is used to have CRC present in all transport formats.		
Header compressor should ensure that small_CID is used and that CID 0 is allocated to this RAB		

7.1.119.2.1.2 Transport channel parameters for interactive or background/DL:8 kbps/ PS RAB + DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.2.1.1 of [1].

7.1.119.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.119.2.1.4 TFCS

TFCS size	72
TFCS	(16.8 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF9, TF0, TF0), (TF10, TF0, TF0), (TF11, TF0, TF0), (TF12, TF0, TF0), (TF13, TF0, TF0), (TF14, TF0, TF0), (TF15, TF0, TF0), (TF16, TF0, TF0), (TF17, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF9, TF1, TF0), (TF10, TF1, TF0), (TF11, TF1, TF0), (TF12, TF1, TF0), (TF13, TF1, TF0), (TF14, TF1, TF0), (TF15, TF1, TF0), (TF16, TF1, TF0), (TF17, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF9, TF0, TF1), (TF10, TF0, TF1), (TF11, TF0, TF1), (TF12, TF0, TF1), (TF13, TF0, TF1), (TF14, TF0, TF1), (TF15, TF0, TF1), (TF16, TF0, TF1), (TF17, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1), (TF9, TF1, TF1), (TF10, TF1, TF1), (TF11, TF1, TF1), (TF12, TF1, TF1), (TF13, TF1, TF1), (TF14, TF1, TF1), (TF15, TF1, TF1), (TF16, TF1, TF1), (TF17, TF1, TF1)

7.1.119.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		128
	DPCCH	Number of TFCI bits/slot	2
		Number of TPC bits/slot	2
	Number of Pilot bits/slot		4
	DPDCH	Number of data bits/slot	32
		Number of data bits/frame	480

7.1.120 Conversational / speech / UL: 40 kbps / PS RAB +
Interactive or Background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH [Rel-5 only]

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release 5 only. This does not apply to Release 6 onwards.

NOTE: The first RAB is used for multiplexed RTP and RTCP flows, the second RAB is used for SIP signaling and the third RAB is used for signaling radio bearers.

7.1.120.1 Uplink

7.1.120.1.1 Transport channel parameters

7.1.120.1.1.1 Transport channel parameters for Conversational / speech / UL: 40 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		UM
	Payload sizes, bit		104, 320, 800
	Max data rate, bps		40000
	UMD PDU header, bit		8
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		112, 328, 808
	TFS	TF0, bits	0x808
		TF1, bits	1x112
		TF2, bits	1x328
		TF3, bits	1x808
	TTI, ms		20
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		2484
	Uplink: Max number of bits/radio frame before rate matching		1242
	RM attribute		180-220

7.1.120.1.1.2 Transport channel parameters for Interactive or Background / UL: 8 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		AM
	Payload sizes, bit		320
	Max data rate, bps		8000
	AMD PDU header, bit		16
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		336
	TFS	TF0, bits	0x336
		TF1, bits	1x336
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		1068
	Uplink: Max number of bits/radio frame before rate matching		267
	RM attribute		135-175

7.1.120.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.120.1.1.4 TFCS

TFCS size	16
TFCS	(40 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1),

7.1.120.1.2 Physical channel parameters

DPCN	Min spreading factor	16
Uplink	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.96

7.1.120.2 Downlink

7.1.120.2.1 Transport channel parameters

7.1.120.2.1.1 Transport channel parameters for Conversational / speech / DL: 40 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		UM
	Payload sizes, bit		104, 320, 800
	Max data rate, bps		40000
	UMD PDU header, bit		8
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		112, 328, 808
	TFS	TF0, bits	0x808
		TF1, bits	1x112
		TF2, bits	1x328
		TF3, bits	1x808
	TTI, ms		20
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		2484
	RM attribute		180-220

7.1.120.2.1.2 Transport channel parameters for Interactive or Background / DL: 8 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		AM
	Payload sizes, bit		320
	Max data rate, bps		8000
	AMD PDU header, bit		16
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		336
	TFS	TF0, bits	0x336
		TF1, bits	1x336
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		1068
	RM attribute		135-175

7.1.120.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.120.2.1.4 TFCS

TFCS size	16
TFCS	(40 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1)

7.1.120.2.2 Physical channel parameters

DPCH Downlink	DTX position		Fixed
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
	DPDCH	Number of Pilot bits/slot	8
		Number of data bits/slot	60
		Number of data bits/frame	900

7.1.121 Interactive or background / UL:16 DL:16 kbps / PS RAB + UL:27.2 DL:27.2 kbps SRBs for DCCH

7.1.121.1 Uplink

7.1.121.1.1 Transport channel parameters

7.1.121.1.1.1 Transport channel parameters for Interactive or background / UL:16 kbps / PS RAB

See subclause 6.10.2.4.1.23b.1.1.1 of [1].

7.1.121.1.1.2 Transport channel parameters for UL:27.2 kbps SRBs for DCCH

See subclause 7.1.3a.1.1.1.

7.1.121.1.3 TFCS

TFCS size	8
TFCS	(16 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF0,TF2), (TF1,TF2)

7.1.121.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	32
	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	0.72

7.1.121.2 Downlink

7.1.121.2.1 Transport channel parameters

7.1.121.2.1.1 Transport channel parameters for Interactive or background / DL:16 kbps / PS RAB

See subclause 6.10.2.4.1.23b.2.1.1 of [1].

7.1.121.2.1.2 Transport channel parameters for DL:27.2 kbps SRBs for DCCH

See subclause 7.1.3a.2.1.1.

7.1.121.2.1.3 TFCS

TFCS size	8
TFCS	(16 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF0,TF2), (TF1,TF2)

7.1.121.2.2 Physical channel parameters

DPCH Downlink	DTX position	Flexible
	Spreading factor	64
	DPCCH	Number of TFCI bits/slot
		Number of TPC bits/slot
		Number of Pilot bits/slot
	DPDCH	Number of data bits/slot
		900

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps.

This is supported in Release '99.

7.1.122 Conversational / speech / UL:39.6 DL:39.6 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH [Rel-5]

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release 5. This is not applied to Release 6 onwards.

NOTE: This RAB is used for the transient state, where couple of IR packets are transmitted to synchronize contexts.

7.1.122.1 Uplink

7.1.122.1.1 Transport channel parameters

7.1.122.1.1.1 Transport channel parameters for conversational/speech/UL:39.6 kbps/ PS RAB

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	584, 640, 656, 672, 688, 720, 784, 792 (alt 0, 584, 640, 656, 672, 688, 720, 784, 792)
	Max data rate, bps	39600
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	592, 648, 664, 680, 696, 728, 792, 800 (alt 0, 592, 648, 664, 680, 696, 728, 792, 800)
TFS	TF0, bits	0x800 (alt 1x0)
	TF1, bits	1x592
	TF2, bits	1x648
	TF3, bits	1x664
	TF4, bits	1x680
	TF5, bits	1x696
	TF6, bits	1x728
	TF7, bits	1x792
	TF8, bits	1x800
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2460
	Uplink: Max number of bits/radio frame before rate matching	1230
	RM attribute	180-220
NOTE: Alternative 1x0 is used to have CRC present in all transport formats.		
Header compressor should ensure that ROHC's small_CID is used and that CID 0 is allocated to this RAB		

7.1.122.1.1.2 Transport channel parameters for interactive or background/UL:8 kbps/ PS RAB + UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.1.1.1 of [1].

7.1.122.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.122.1.1.4 TFCS

TFCS size	36
TFCS	(39.6 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1)

7.1.122.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.96

7.1.122.2 Downlink

7.1.122.2.1 Transport channel parameters

7.1.122.2.1.1 Transport channel parameters for conversational/speech/DL:39.6 kbps/ PS RAB

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	584, 640, 656, 672, 688, 720, 784, 792 (alt 0, 584, 640, 656, 672, 688, 720, 784, 792)
	Max data rate, bps	39600
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	592, 648, 664, 680, 696, 728, 792, 800 (alt 0, 592, 648, 664, 680, 696, 728, 792, 800)
	TFS TF0, bits	0x800 (alt 1x0)
	TF1, bits	1x592

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
	TF2, bits	1x648
	TF3, bits	1x664
	TF4, bits	1x680
	TF5, bits	1x696
	TF6, bits	1x728
	TF7, bits	1x792
	TF8, bits	1x800
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2460
	RM attribute	180-220
NOTE: Alternative 1x0 is used to have CRC present in all transport formats.		
Header compressor should ensure that small_CID is used and that CID 0 is allocated to this RAB		

7.1.122.2.1.2 Transport channel parameters for interactive or background/DL:8 kbps/ PS RAB + DL: 8 kbps / PS RAB

See subclause 6.10.2.4.1.56.2.1.1 of [1].

7.1.122.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.122.2.1.4 TFCS

TFCS size	36
TFCS	(39.6 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1)

7.1.122.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
	DPDCH	Number of data bits/slot	60
		Number of data bits/frame	900

7.1.123 Conversational / speech / UL:17.6 DL:17.6 kbps / PS RAB +
Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive
or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps
SRBs for DCCH [Rel-5]

The minimum UE classes supporting this combination are UL: 32 kbps, DL: 32 kbps plus support for 'Maximum number of TFC' = 96.

This is supported in Release 5. This is not applied to Release 6 onwards.

NOTE: This RAB is used for the steady-state, where the contexts of the ROHC compressor and the ROHC decompressor are already synchronized so IR packets are not transmitted.

7.1.123.1 Uplink

7.1.123.1.1 Transport channel parameters

7.1.123.1.1.1 Transport channel parameters for conversational/speech/UL:17.6.8 kbps/ PS RAB

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	96, 112, 144, 152, 168, 184, 200, 216, 232, 248, 280, 296, 304, 312, 320, 344, 352 (alt 0, 96, 112, 144, 152, 168, 184, 200, 216, 232, 248, 280, 296, 304, 312, 320, 344, 352)
	Max data rate, bps	17600
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	104, 120, 152, 160, 176, 192, 208, 224, 240, 256, 288, 304, 312, 320, 328, 352, 360 (alt 0, 104, 120, 152, 160, 176, 192, 208, 224, 240, 256, 288, 304, 312, 320, 328, 352, 360)
TFS	TF0, bits	0x360 (alt 1x0)
	TF1, bits	1x104
	TF2, bits	1x120
	TF3, bits	1x152
	TF4, bits	1x160
	TF5, bits	1x176
	TF6, bits	1x192
	TF7, bits	1x208
	TF8, bits	1x224
	TF9, bits	1x240
	TF10, bits	1x256
	TF11, bits	1x288
	TF12, bits	1x304
	TF13, bits	1x312
	TF14, bits	1x320
	TF15, bits	1x328
	TF16, bits	1x352
	TF17, bits	1x360

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1140
	Uplink: Max number of bits/radio frame before rate matching	570
	RM attribute	180-220
<p>NOTE: Alternative 1x0 is used to have CRC present in all transport formats.</p> <p>Header compressor should ensure that small_CID is used and that CID 0 is allocated to this RAB.</p>		

7.1.123.1.1.2 Transport channel parameters for interactive or background/UL:8 kbps/ PS RAB + UL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.1.1.1 of [1].

7.1.123.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.123.1.1.4 TFCS

TFCS size	72
TFCS	(17.6 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF9, TF0, TF0), (TF10, TF0, TF0), (TF11, TF0, TF0), (TF12, TF0, TF0), (TF13, TF0, TF0), (TF14, TF0, TF0), (TF15, TF0, TF0), (TF16, TF0, TF0), (TF17, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF9, TF1, TF0), (TF10, TF1, TF0), (TF11, TF1, TF0), (TF12, TF1, TF0), (TF13, TF1, TF0), (TF14, TF1, TF0), (TF15, TF1, TF0), (TF16, TF1, TF0), (TF17, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF9, TF0, TF1), (TF10, TF0, TF1), (TF11, TF0, TF1), (TF12, TF0, TF1), (TF13, TF0, TF1), (TF14, TF0, TF1), (TF15, TF0, TF1), (TF16, TF0, TF1), (TF17, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1), (TF9, TF1, TF1), (TF10, TF1, TF1), (TF11, TF1, TF1), (TF12, TF1, TF1), (TF13, TF1, TF1), (TF14, TF1, TF1), (TF15, TF1, TF1), (TF16, TF1, TF1), (TF17, TF1, TF1)

7.1.123.1.2 Physical channel parameters

DPCP	Min spreading factor	32
Uplink	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	0.84

7.1.123.2 Downlink

7.1.123.2.1 Transport channel parameters

7.1.123.2.1.1 Transport channel parameters for conversational/speech/DL:17.6 kbps/ PS RAB

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	96, 112, 144, 152, 168, 184, 200, 216, 232, 248, 280, 296, 304, 312, 320, 344, 352 (alt 0, 96, 112, 144, 152, 168, 184, 200, 216, 232, 248, 280, 296, 304, 312, 320, 344, 352)
	Max data rate, bps	17600
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	104, 120, 152, 160, 176, 192, 208, 224, 240, 256, 288, 304, 312, 320, 328, 352, 360 (alt 0, 104, 120, 152, 160, 176, 192, 208, 224, 240, 256, 288, 304, 312, 320, 328, 352, 360)
TFS	TF0, bits	0x360 (alt 1x0)
	TF1, bits	1x104
	TF2, bits	1x120
	TF3, bits	1x152
	TF4, bits	1x160
	TF5, bits	1x176
	TF6, bits	1x192
	TF7, bits	1x208
	TF8, bits	1x224
	TF9, bits	1x240
	TF10, bits	1x256
	TF11, bits	1x288
	TF12, bits	1x304
	TF13, bits	1x312
	TF14, bits	1x320

Higher layer	RAB/Signalling RB	RAB
PDCP	PDCP header size, bit	0
	TF15, bits	1x328
	TF16, bits	1x352
	TF17, bits	1x360
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1140
	RM attribute	180-220
NOTE: Alternative 1x0 is used to have CRC present in all transport formats. Header compressor should ensure that small_CID is used and that CID 0 is allocated to this RAB		

7.1.123.2.1.2 Transport channel parameters for interactive or background/DL:8 kbps/ PS RAB + DL:8 kbps / PS RAB

See subclause 6.10.2.4.1.56.2.1.1 of [1].

7.1.123.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.123.2.1.4 TFCS

TFCS size	72
TFCS	(17.6. kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF9, TF0, TF0), (TF10, TF0, TF0), (TF11, TF0, TF0), (TF12, TF0, TF0), (TF13, TF0, TF0), (TF14, TF0, TF0), (TF15, TF0, TF0), (TF16, TF0, TF0), (TF17, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF9, TF1, TF0), (TF10, TF1, TF0), (TF11, TF1, TF0), (TF12, TF1, TF0), (TF13, TF1, TF0), (TF14, TF1, TF0), (TF15, TF1, TF0), (TF16, TF1, TF0), (TF17, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF9, TF0, TF1), (TF10, TF0, TF1), (TF11, TF0, TF1), (TF12, TF0, TF1), (TF13, TF0, TF1), (TF14, TF0, TF1), (TF15, TF0, TF1), (TF16, TF0, TF1), (TF17, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1), (TF9, TF1, TF1), (TF10, TF1, TF1), (TF11, TF1, TF1), (TF12, TF1, TF1), (TF13, TF1, TF1), (TF14, TF1, TF1), (TF15, TF1, TF1), (TF16, TF1, TF1), (TF17, TF1, TF1)

7.1.123.2.2 Physical channel parameters

DPCH Downlink	DTX position		Flexible
	Spreading factor		128
	DPCCH	Number of TFCI bits/slot	2
		Number of TPC bits/slot	2
		Number of Pilot bits/slot	4
	DPDCH	Number of data bits/slot	32
		Number of data bits/frame	480

7.1.124 Conversational / speech / UL: 39.2 kbps / PS RAB + Interactive or Background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release 6.

NOTE: The first RAB is used for multiplexed RTP and RTCP flows, the second RAB is used for SIP signaling and the third RAB is used for signaling radio bearers.

7.1.124.1 Uplink

7.1.124.1.1 Transport channel parameters

7.1.124.1.1.1 Transport channel parameters for Conversational / speech / UL: 39.2 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		UM
	Payload sizes, bit		88, 304, 784
	Max data rate, bps		39200
	UMD PDU header, bit		8
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		96, 312, 792
	TFS	TF0, bits	0x792
		TF1, bits	1x96
		TF2, bits	1x312
		TF3, bits	1x792
	TTI, ms		20
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		2436
	Uplink: Max number of bits/radio frame before rate matching		1218
	RM attribute		180-220
NOTE: Header compressor should ensure that ROHC's small_CID is used			

7.1.124.1.1.2 Transport channel parameters for Interactive or Background / UL: 8 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		AM
	Payload sizes, bit		320
	Max data rate, bps		8000
	AMD PDU header, bit		16
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		336
	TFS	TF0, bits	0x336
		TF1, bits	1x336
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		1068
	Uplink: Max number of bits/radio frame before rate matching		267
	RM attribute		135-175

7.1.124.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.1.1.1 of [1].

7.1.124.1.1.4 TFCS

TFCS size	16
TFCS	(40 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1),

7.1.124.1.2 Physical channel parameters

DPCN	Min spreading factor	16
Uplink	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.96

7.1.124.2 Downlink

7.1.124.2.1 Transport channel parameters

7.1.124.2.1.1 Transport channel parameters for Conversational / speech / DL: 39.2 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		UM
	Payload sizes, bit		88, 304, 784
	Max data rate, bps		39200
	UMD PDU header, bit		8
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		96, 312, 792
	TFS	TF0, bits	0x792
		TF1, bits	1x96
		TF2, bits	1x312
		TF3, bits	1x792
	TTI, ms		20
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		2436
	RM attribute		180-220
NOTE: Header compressor should ensure that ROHC's small_CID is used			

7.1.124.2.1.2 Transport channel parameters for Interactive or Background / DL: 8 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		AM
	Payload sizes, bit		320
	Max data rate, bps		8000
	AMD PDU header, bit		16
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		336
	TFS	TF0, bits	0x336
		TF1, bits	1x336
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		1068
	RM attribute		135-175

7.1.124.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.2.4.1.2.2.1.1 of [1].

7.1.124.2.1.4 TFCS

TFCS size	16
TFCS	(40 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1)

7.1.124.2.2 Physical channel parameters

DPCH Downlink	DTX position		Fixed
	Spreading factor		64
	DPCCH	Number of TFCI bits/slot	8
		Number of TPC bits/slot	4
		Number of Pilot bits/slot	8
		Number of data bits/slot	60
		Number of data bits/frame	900

7.2 Combinations on S-CCPCH

7.2.1 Stand-alone signalling RB for PCCH

See subclause 6.10.2.4.3.1 of [1].

The minimum UE class supporting this combination is DL: 12 kbps.

This is supported in Release '99.

7.2.2 Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.2.4.3.2 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.2.3 Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.2.4.3.2a of [1].

The minimum UE class supporting this combination is DL: 32 kbps plus support for 5 AM entities.

This is supported in Release '99.

7.2.4 Interactive/Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.2.4.3.3 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.2.5 16 kbps RB for CTCH + SRB for CCCH + SRB for BCCH

See subclause 6.10.2.4.3.4 of [1].

The minimum UE class supporting this combination is DL: 12 kbps.

This is supported in Release '99.

7.2.6 RB for CTCH + Interactive/Background 32 kbps PS RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.2.6.1 Transport channel parameters

7.2.6.1.1 Transport channel parameters of RB for CTCH

Higher layer	RAB/signalling RB	N/A
	User of Radio Bearer	BMC
RLC	Logical channel type	CTCH
	RLC mode	UM
	Payload sizes, bit	152
	Max data rate, bps	15200
	UMD PDU header, bit	8
MAC	MAC header, bit	8
	MAC multiplexing	N/A
Layer 1	TrCH type	FACH
	TB sizes, bit	168
	TFS	TF0, bts
		0x168
	TTI, ms	1x168
		10
	Coding type	CC 1/2
	CRC, bit	16
	Max number of bits/TTI before rate matching	384
	RM attribute	200-240

7.2.6.1.2 Transport channel parameters of SRB for Interactive/Background 32 kbps PS RAB

See subclause 6.10.2.4.3.2.1.1 of [1].

7.2.6.1.3 Transport channel parameter of SRB for PCCH

See subclause 6.10.2.4.3.1.1.1 of [1].

7.2.6.1.4 Transport channel parameters of SRBs for CCCH, SRB for DCCH, and SRB for BCCH

See subclause 6.10.2.4.3.2.1.2 of [1].

7.2.6.1.5

TFCS

TFCS size	14
TFCS	(SRB for PCCH, SRBs for CCCH/DCCH/BCCH, 32kbps RAB, RB for CTCH) = (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF0, TF1, TF0, TF0), (TF1, TF1, TF0, TF0), (TF0, TF2, TF0, TF0), (TF1, TF2, TF0, TF0), (TF0, TF0, TF1, TF0), (TF0, TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF0, TF1), (TF0, TF1, TF0, TF1), (TF1, TF1, TF0, TF1), (TF0, TF2, TF0, TF1), (TF0, TF0, TF1, TF1)

7.2.6.2

Physical channel parameters

SCCPCH	DTX position	Flexible
	Spreading factor	64
	Number of TFCI bits/slot	8
	Number of Pilot bits/slot	0
	Number of data bits/slot	72
	Number of data bits/frame	1080

7.2.7 Interactive/Background 16 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

7.2.7.1 Transport channel parameters

7.2.7.1.1 Transport channel parameters for Interactive/Background 16 kbps PS RAB

Higher layer	RAB/signalling RB	RAB	
	User of Radio Bearer	Interactive/ Background RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	320	
	Max data rate, bps	16000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	24	
	MAC multiplexing	N/A	
Layer 1	TrCH type	FACH	
	TB sizes, bit	360	
	TFS	TF0, bits	0x360
		TF1, bits	1x360
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI before rate matching	1140	
	RM attribute	110-150	

7.2.7.1.2 Transport channel parameters of SRBs for CCCH, SRB for DCCH, and SRB for BCCH

Higher layer	RAB/signalling RB	SRB#0	SRB#1	SRB#2	SRB#3	SRB#4	SRB#5					
	User of Radio Bearer	RRC	RRC	RRC	NAS_DT High prio	NAS_DT Low prio	RRC					
RLC	Logical channel type	CCCH	DCCH	DCCH	DCCH	DCCH	BCCH					
	RLC mode	UM	UM	AM	AM	AM	TM					
	Payload sizes, bit	152	136 or 120 (note)	128	128	128	166					
	Max data rate, bps	15200	13600 or 12000	12800	12800	12800	16600					
	AMD/UMD/TrD PDU header, bit	8	8	16	16	16	0					
MAC	MAC header, bit	8	24 or 40	24	24	24	2					
	MAC multiplexing	6 logical channel multiplexing										
Layer 1	TrCH type	FACH										
	TB sizes, bit	168										
	TFS	TF0, bits	0x168									
		TF1, bits	1x168									
		TF2, bits	2x168									
	TTI, ms	20										
	Coding type	CC 1/2										
	CRC, bit	16										
	Max number of bits/TTI before rate matching	752										
	RM attribute	200-240										
NOTE: MAC header size and PLC payload size depend on use of U-RNTI or C-RNTI.												

7.2.7.1.3 TFCS

TFCS size	4
TFCS	(SRBs for CCCH/DCCH/BCCH, 16 kbps RAB) = (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1)

7.2.7.2 Physical channel parameters

SCCPCH	DTX position	Flexible
	Spreading factor	128
	Number of TFCI bits/slot	2
	Number of Pilot bits/slot	0
	Number of data bits/slot	38
	Number of data bits/frame	570

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

7.2.8 8 kbps RB for CTCH + SRB for CCCH + SRB for BCCH

7.2.8.1 Transport channel parameters

7.2.8.1.1 Transport channel parameters of 8 kbps RB for CTCH

Higher layer	RAB/signalling RB	N/A
	User of Radio Bearer	BMC
RLC	Logical channel type	CTCH
	RLC mode	UM
	Payload sizes, bit	152
	Max data rate, bps	7600
	UMD PDU header, bit	8
MAC	MAC header, bit	8
	MAC multiplexing	N/A
Layer 1	TrCH type	FACH
	TB sizes, bit	168
	TFS	TF0, bts TF1, bits
		0x168 1x168
	TTI, ms	20
	Coding type	CC 1/3
	CRC, bit	16
	Max number of bits/TTI before rate matching	576
	RM attribute	200-240

7.2.8.1.2 Transport channel parameters of SRB for CCCH and SRB for BCCH

Higher layer	RAB/signalling RB	SRB#0	SRB#5
	User of Radio Bearer	RRC	RRC
RLC	Logical channel type	CCCH	BCCH
	RLC mode	UM	TM
	Payload sizes, bit	152	166
	Max data rate, bps	7600	8300
	AMD/UMD/TrD PDU header, bit	8	0
MAC	MAC header, bit	8	2
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	FACH	
	TB sizes, bit	168	
	TFS	TF0, bits	0x168
		TF1, bits	1x168
	TTI, ms	20	
	Coding type	CC 1/3	
	CRC, bit	16	
	Max number of bits/TTI before rate matching	576	
	RM attribute	200-240	

7.2.8.1.3 TFCS

TFCS size	3
TFCS	(SRBs for CCCH/ BCCH, RB for CTCH) = (TF0, TF0), (TF1, TF0), (TF0, TF1)

7.2.8.2 Physical channel parameters

SCCPCH	DTX position	Flexible
	Spreading factor	256
	Number of TFCI bits/slot	2
	Number of Pilot bits/slot	0
	Number of data bits/slot	18
	Number of data bits/frame	270

The minimum UE class supporting this combination is DL: 12 kbps.

This is supported in Release '99.

7.2.9 Interactive/Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

7.2.9.1 Transport channel parameters

7.2.9.1.1 Transport channel parameters for Interactive or background / 32 kbps / PS RAB + 32 kbps / PS RAB (RLC size 320)

See subclause 6.10.2.4.3.2a.1.1 of [1]

7.2.9.1.2 Transport channel parameters for Interactive or background / 32 kbps / PS RAB + 32 kbps / PS RAB (RLC size 640)

Higher Layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	640	640
	Max data rate, bps	32000	32000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	24	24
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	FACH	
	TB sizes, bit	680	
	TFS	TF0, bits	0x680
		TF1, bits	1x680
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2100	
	RM attribute	110- 150	

7.2.9.1.3 Transport channel parameters of SRB for PCCH

See subclause 6.10.2.4.3.1.1 of [1]

7.2.9.1.4 Transport channel parameters of SRBs for CCCH, SRB for DCCH, and SRB for BCCH

See subclause 6.10.2.4.3.2.1.2 of [1]

7.2.9.1.5 TFCS

TFCS size	7, 8, 9 or 10 for 240 bits PCH TrBlk size and TF3 not used (alt 7, 8, 9 or 10, 11 or 12 for 80 bits PCH TrBlk size and TF3 not used) (alt 7, 8, 9, 10 or 11 for 240 bits PCH TrBlk size and TF3 used) (alt. 7, 8, 9, 10, 11, 12, 13 or 14 for 80 bits PCH TrBlk size and TF3 used)
TFCS	(SRB for PCCH, SRBs for CCCH/ DCCH/ BCCH, 32 kbps RAB (RLC size 320), 32 kbps RAB (RLC size 640)) = (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF0, TF1, TF0, TF0), (TF1, TF1, TF0, TF0), (TF0, TF2, TF0, TF0), [TF1, TF2, TF0, TF0] (see note), (TF0, TF0, TF1, TF0), [TF0, TF1, TF1, TF0] (see note), (TF0, TF0, TF0, TF1), [TF0, TF1, TF0, TF1] (see note) for 240 bits PCH TrBlk size and TF3 not used (alt. (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF0, TF1, TF0, TF0), (TF1, TF1, TF0, TF0), (TF0, TF2, TF0, TF0), [TF1, TF2, TF0, TF0] (see note), (TF0, TF0, TF1, TF0), [TF1, TF0, TF1, TF0] (see note), [TF0, TF1, TF0, TF1] (see note), [TF0, TF1, TF0, TF1] (see note) for 80 bits PCH TrBlk size and TF3 not used) (alt. (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF0, TF1, TF0, TF0), (TF1, TF1, TF0, TF0), (TF0, TF2, TF0, TF0), [TF1, TF2, TF0, TF0] (see note), [TF0, TF3, TF0, TF0] (see note), (TF0, TF0, TF1, TF0), [TF0, TF1, TF0, TF1] (see note) for 240 bits PCH TrBlk size and TF3 used) (alt. (TF0, TF0, TF0, TF0), (TF1, TF0, TF0, TF0), (TF0, TF1, TF0, TF0), (TF1, TF1, TF0, TF0), (TF0, TF2, TF0, TF0), [TF1, TF2, TF0, TF0] (see note), [TF0, TF3, TF0, TF0] (see note), [TF1, TF3, TF0, TF0] (see note), (TF0, TF0, TF1, TF0), [TF1, TF0, TF1, TF0] (see note), [TF0, TF1, TF0, TF1] (see note), (TF0, TF0, TF0, TF1), [TF1, TF0, TF0, TF1] (see note), [TF0, TF1, TF0, TF1] (see note) for 80 bits PCH TrBlk size and TF3 used)
NOTE:	These TFCs are available only if SCCPCH can be allocated bigger Tx power than required Tx power for TFC of (TF0, TF2, TF0).

7.2.9.2 Physical channel parameters

SCCPCH	DTX position	Flexible
	Spreading factor	64
	Number of TFCI bits/slot	8
	Number of Pilot bits/slot	0
	Number of data bits/slot	72
	Number of data bits/frame	1080

The minimum UE class supporting this combination is DL: 32 kbps plus support for 5 AM entities.

7.3 Combinations on PRACH

7.3.1 Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH

See subclause 6.10.2.4.4.1 of [1].

The minimum UE class supporting this combination is UL: 12 kbps.

This is supported in Release '99.

7.3.2 Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH

See subclause 6.10.2.4.4.2 of [1].

The minimum UE class supporting this combination is UL: 12 kbps plus support for 5 AM entities and in addition for the alternative configuration 'Maximum number of DPDCH bits transmitted per 10 ms' = 1200.

This is supported in Release '99

7.3.3 Interactive/Background 32 kbps PS RAB + SRB for CCCH + SRB for DCCH

Higher layer	RAB/signalling RB	RAB	SRB#0	SRB#1	SRB#2	SRB#3	SRB#4
	User of Radio Bearer	Interactive/Background RAB	RRC	RRC	RRC	NAS_DT High prio	NAS_DT Low prio
RLC	Logical channel type	DTCH	CCCH	DCCH	DCCH	DCCH	DCCH
	RLC mode	AM	TM	UM	AM	AM	AM
	Payload sizes, bit	320	166 / 238 (Rel6)	136	128	128	128
	Max data rate, bps	32000	16600/23800 (Rel6, see Note)	13600	12800	12800	12800
	AMD/UMD/TrD PDU header, bit	16	0	8	16	16	16

Higher layer	RAB/signalling RB	RAB	SRB#0	SRB#1	SRB#2	SRB#3	SRB#4
MAC	User of Radio Bearer	Interactive/Background RAB	RRC	RRC	RRC	NAS_DT High prio	NAS_DT Low prio
Layer 1	MAC header, bit	24	2	24	24	24	24
MAC multiplexing		6 logical channel multiplexing					
TrCH type		RACH					
TB sizes, bit		360	168 / 240 (Rel6, see Note)	168	168	168	168
TFS	TF0, bits	1x168					
	TF1, bits	1x360					
	TF2, bits (Rel 6, see Note)	1x240					
TTI, ms		20 (alt. 10)					
Coding type		CC 1/2					
CRC, bit		16					
Max number of bits/TTI after channel coding		768	384 / 528 (Rel 6, see Note)	384	384	384	384
Max number of bits/ Radio frame before rate matching		384 (alt. 768)	192 / 256 Rel 6 (alt. 384 / 512 Rel 6, see Note)	192 (alt. 384)	192 (alt. 384)	192 (alt. 384)	192 (alt. 384)

7.3.3.1 TFCS

TFCS size	2, 3 (in Rel 6 , see Note)
TFCS	32 kbps + SRBs for CCCH/ DCCH = TF0, TF1, TF2 (in Rel 6 , see Note)

NOTE: In Release 6 UEs shall use the TF/TFC as indicated in the IE "Additional Dynamic Transport Format Information for CCCH" and the IE "Additional RACH TFCS for CCCH' for CCCH if available. In this configuration the indicated TF / TFC will be transmitted in these IEs.

The minimum UE class supporting this combination is UL: 12 kbps.

This is supported in Release 6.

7.4 Radio Bearer and Radio Bearer Combinations on DPCH and HS-PDSCH

In the following tables for the references to [1], the details of the configuration are defined there.

7.4.1 RB for Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.1.1 Uplink

	Radio Bearer	(reserved for Radio Bearer)	Signalling Radio Bearer	(reserved for Signalling Radio Bearer
--	--------------	-----------------------------	-------------------------	--

	on DPCH	<i>(on E-DPCH)</i>	on DPCH	<i>(on E-DPCH)</i>
Transport Channel	6.10.2.4.1.26.1 of [1]			
TFCS				
Physical Channel				

7.4.1.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel		6.10.2.4.5.1.2.1.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel		6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.2.2.2 of [1]	

7.4.1b Void

7.4.2 RB for Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 384 kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.2.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.1.34.1 of [1]			
TFCS				
Physical Channel				

7.4.2.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel		6.10.2.4.5.1.2.1.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel		6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.2.2.2 of [1]	

7.4.3 RB for Conversational / speech / UL:12.2 kbps / CS RAB + Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 384 kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11. The minimum UE class to support the alternative UL physical configuration 2 is UL: 384kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 32.

This is supported in Release 5.

7.4.3.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel		6.10.2.4.5.3.1of [1]		
TFCS				
Physical Channel				

7.4.3.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel		6.10.2.4.5.3.2 of [1]		
TFCS				
Physical Channel				

- 7.4.3a RB for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH**

The minimum UE classes supporting this combination are UL: 64 kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.3a.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.5.3a.1of [1]			
TFCS				
Physical Channel				

7.4.3a.2 Downlink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.5.3a.1of [1]			
TFCS				
Physical Channel				

See subclause 6.10.2.4.5.3a.2 of [1].

- 7.4.4 RB for Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH**

The minimum UE classes supporting this combination are UL: 384 kbps, DL on DPCH: 64 kbps, DL on HS-PDSCH: category 11. The minimum UE class to support the alternative UL configuration is DL: 768 kbps plus support for 'Maximum sum of number of bits of all transport blocks being transmitted at an arbitrary time instant' = 20480 and 'Maximum sum of number of bits of all turbo coded transport blocks being transmitted at an arbitrary time instant' = 20480.

This is supported in Release 5.

7.4.4.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer	<i>(reserved for Signalling Radio Bearer)</i>
--	---------------------------------	---	------------------------------------	---

			on DPCH	on E-DPCH)
Transport Channel	6.10.2.4.5.4.1 of [1]			
TFCS				
Physical Channel				

7.4.4.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.5.4.2 of [1]			
TFCS				
Physical Channel				

- 7.4.4a RB for Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps, DL on DPCH: 64 kbps, DL on HS-PDSCH: category 11. The minimum UE class to support the alternative UL combination (40ms TTI) is UL: 384kbps.

This is supported in Release 5.

7.4.4a.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.5.4a.1 of [1]			
TFCS				
Physical Channel				

7.4.4a.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH

Transport Channel	6.10.2.4.5.4a.2 of [1]
TFCS	
Physical Channel	

- 7.4.5 RB for Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + Interactive or background / UL:384 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.

The minimum UE classes supporting this combination are UL: 384 kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.5.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel	6.10.2.4.5.5.1 of [1]			
TFCS				
Physical Channel				

7.4.5.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.5.5.2 of [1]			
TFCS				
Physical Channel				

- 7.4.5a RB for Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH**

The minimum UE classes supporting this combination are UL: 64 kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.5a.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.5.5a.1 of [1]			
TFCS				
Physical Channel				

7.4.5a.2 Downlink

See subclause 6.10.2.4.5.5a.2 of [1].

- 7.4.6 Interactive or background / UL:128 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH**

The minimum UE classes supporting this combination are UL: 128 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.6.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.1.28.1 of [1]			
TFCS				
Physical Channel				

7.4.6.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel		6.10.2.4.5.1.2.1.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel		6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.2.2.2 of [1]	

7.4.7 RB for Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + Interactive or background / UL:64 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.7.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel		6.10.2.4.1.38i.1 of [1]		
TFCS				
Physical Channel				

7.4.7.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.4a.2.1.1 of [1]	6.10.2.4.5.1.2.1.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.4a.2.1.3 of [1]			
Physical Channel	6.10.2.4.1.4a.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.4a.2.2 of [1] See NOTE.	

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH.

7.4.8 RB for Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + RB for Interactive or background / UL:128 DL: [Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16 and 'Maximum number of TFC' = 64, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.8.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.1.4a.1.1.1 of [1] 6.10.2.4.1.28.1.1.1 of [1]		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.8.1.1			
Physical Channel	See 7.4.8.1.2			

7.4.8.1.1 TFCS

TFCS size	60
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 128 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF3,TF2,TF0,TF0,TF0), (TF4,TF3,TF0,TF0,TF0), (TF5,TF4,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF0,TF1,TF0), (TF3,TF2,TF0,TF1,TF0), (TF4,TF3,TF0,TF1,TF0), (TF5,TF4,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF0,TF2,TF0), (TF3,TF2,TF0,TF2,TF0), (TF4,TF3,TF0,TF2,TF0), (TF5,TF4,TF1,TF2,TF0), (TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF3,TF0), (TF2,TF1,TF0,TF3,TF0), (TF3,TF2,TF0,TF3,TF0), (TF4,TF3,TF0,TF3,TF0), (TF5,TF4,TF1,TF3,TF0), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0), (TF2,TF1,TF0,TF4,TF0), (TF3,TF2,TF0,TF4,TF0), (TF4,TF3,TF0,TF4,TF0), (TF5,TF4,TF1,TF4,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF1), (TF4,TF3,TF0,TF0,TF1), (TF5,TF4,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF0,TF1,TF1), (TF3,TF2,TF0,TF1,TF1), (TF4,TF3,TF0,TF1,TF1), (TF5,TF4,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF0,TF2,TF1), (TF3,TF2,TF0,TF2,TF1), (TF4,TF3,TF0,TF2,TF1), (TF5,TF4,TF1,TF2,TF1), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1), (TF2,TF1,TF0,TF3,TF1), (TF3,TF2,TF0,TF3,TF1), (TF4,TF3,TF0,TF3,TF1), (TF5,TF4,TF1,TF3,TF1), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1), (TF2,TF1,TF0,TF4,TF1), (TF3,TF2,TF0,TF4,TF1), (TF4,TF3,TF0,TF4,TF1), (TF5,TF4,TF1,TF4,TF1)

7.4.8.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	8
	Max number of DPDCH data bits/radio frame	4800
	Puncturing Limit	0.92

7.4.8.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.4a.2.1.1 of [1]	6.10.2.4.5.1.2.1.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.4a.2.1.3 of [1]			
Physical Channel	6.10.2.4.1.4a.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	<i>6.10.2.4.1.4a.2.2 of [1] See NOTE.</i>	

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH

7.4.9 Void

7.4.10 RB for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + RB for Interactive or background / UL:128 DL: [Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 384 kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.10.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.1.44.1 of [1]			
TFCS				
Physical Channel				

7.4.10.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.4.2.1.1 of [1]	6.10.2.4.5.1.2.1.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.4.2.1.3 of [1]			

Physical Channel	6.10.2.4.1.4.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	<i>6.10.2.4.1.4.2.2 of [1] See NOTE.</i>	
------------------	-------------------------	---------------------------	--	--

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH.

7.4.11 Void

- 7.4.12 RB for Conversational / unknown / UL:64 DL:64 kbps / CS RAB + RB for Interactive or background / UL:128 DL:[Bit rate depending on the UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.

The minimum UE classes supporting this combination are UL: 384kbps, DL on DPCH: 64 kbps, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.12.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel		6.10.2.4.1.53.1 of [1]		
TFCS				
Physical Channel				

7.4.12.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.13.2.1.1 of [1]	6.10.2.4.5.1.2.1.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS		6.10.2.4.1.13.2.1.3 of [1]		
Physical Channel	6.10.2.4.1.13.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	<i>6.10.2.4.1.13.2.2 of [1] See NOTE.</i>	

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH

- 7.4.13 RB for Conversational / unknown / UL:42.8 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + RB for interactive / background UL: 16 kbps DL:[max bit rate depending

on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.13.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.1.60.1 of [1]			
TFCS				
Physical Channel				

7.4.13.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel		See 7.4.13.2.1.1	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel	6.10.2.4.1.2.2.2 of [1]	6.10.2.4.5.2.2.2 in [1]	<i>6.10.2.4.1.4a.2.2 of [1] See NOTE.</i>	

NOTE: already included in Physical Channel Definition of Radio Bearer on DPCH

7.4.13.2.1 Transport channel parameters

7.4.13.2.1.1 Transport channel parameters for HS-DSCH

7.4.13.2.1.1.1 MAC-d flow parameters for conversational / unknown DL:[max bit rate depending on UE category] / PS RAB

Higher Layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	920, 304, 96
	Max data rate, bps	depends on UE category NOTE1
	UMD PDU header, bit	8
MAC	MAC-d header, bit	0
	MAC multiplexing	N/A
	MAC-d PDU size, bit	928, 312, 104
	MAC-hs header fixed part, bit	21
Layer 1	TrCH type	HS-DSCH
	TTI	2 ms
	Coding type	TC
	CRC, bit	24

NOTE1: The peak throughput may be limited by the maximum number of MAC-d PDUs that can be included in a single MAC-hs PDU (see [25.321]).

7.4.13.2.1.1.2 MAC-d flow parameters for interactive or background DL:[max bit rate depending on UE category] / PS RAB

See subclause 6.10.2.4.5.1.2.1.1.1 of [1].

7.4.14 RB for Streaming / unknown / UL:16 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + RB for Interactive or background / UL:128 DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps plus support for 'Maximum number of DPDCH bits transmitted per 10 ms' = 4800 and 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16, DL on DPCH: 32 kbps plus support for HS-PDSCH and 'Maximum number of AM entities' = 5, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.14.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel	6.10.2.4.1.58.1.1.1 of [1] 6.10.2.4.1.28.1.1.1 of [1]		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.14.1.1			
Physical	See 7.4.14.1.2			

Channel	
---------	--

7.4.14.1.1 Transport channel parameters

7.4.14.1.1.1 Void

7.4.14.1.1.2 Void

7.4.14.1.1.3 Void

7.4.14.1.1.4 TFCS

TFCS size	20
TFCS	(16 kbps RAB, 128 kbps RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF0, TF3, TF0), (TF1, TF3, TF0), (TF0, TF4, TF0), (TF1, TF4, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1), (TF0, TF3, TF1), (TF1, TF3, TF1), (TF0, TF4, TF1), (TF1, TF4, TF1)

7.4.14.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	8
	Max number of DPDCH data bits/radio frame	4800
	Puncturing Limit	0.8

7.4.14.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel		See 7.4.14.2.1.1	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel	6.10.2.4.1.2.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.4a.2.2 of [1] See NOTE.	

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH

7.4.14.2.1 Transport channel parameters

7.4.14.2.1.1 Transport channel parameters for HS-DSCH

7.4.14.2.1.1.1 MAC-d flow parameters for Streaming / unknown / DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320 (alt. 640)
	Max data rate, bps	depends on UE category NOTE1
	AMD PDU header, bit	16
MAC	MAC-d header, bit	0
	MAC multiplexing	N/A
	MAC-d PDU size, bit	336 (alt. 656)
	MAC-hs header fixed part, bit	21
Layer 1	TrCH type	HS-DSCH
	TTI	2 ms
	Coding type	TC
	CRC, bit	24

NOTE1: The peak throughput may be limited by the maximum number of MAC-d PDUs that can be included in a single MAC-hs PDU (see [25.321]).

7.4.14.2.1.1.2 MAC-d flow parameters for Interactive or background / DL: [max bit rate depending on UE category & RAB maximum bit rate] / PS RAB

See subclause 6.10.2.4.5.1.2.1.1.1 of [1].

7.4.14.2.1.2 Void

7.4.15 RB for Streaming / unknown / UL:64 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + RB for Interactive or background / UL:128 DL: [max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

Note that the streaming RAB is not supported by all number of processes for UE category 1 and 11.

The minimum UE classes supporting this combination are UL: 384kbps, DL on DPCH: 64 kbps plus support for 'Maximum number of AM entities' = 5 and 'Total RLC AM buffer size' = 50, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.15.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel	6.10.2.4.1.28.1.1.1 of [1]		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.15.1.1.4			
Physical Channel	See 7.4.15.1.2			

7.4.15.1.1 Transport channel parameters

7.4.15.1.1.1 Transport channel parameters for Streaming / unknown / UL:64 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	64000	
	AM PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	3x656
		TF4, bits	4x656
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8076	
	Uplink: Max number of bits/radio frame before rate matching	2019	
	RM attribute	125-165	

7.4.15.1.1.2 Void

7.4.15.1.1.3 Void

7.4.15.1.1.4 TFCS

TFCS size	50
TFCS	(64 kbps RAB, 128 kbps RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF2, TF2, TF0), (TF3, TF2, TF0), (TF4, TF2, TF0), (TF0, TF3, TF0), (TF1, TF3, TF0), (TF2, TF3, TF0), (TF3, TF3, TF0), (TF4, TF3, TF0), (TF0, TF4, TF0), (TF1, TF4, TF0), (TF2, TF4, TF0), (TF3, TF4, TF0), (TF4, TF4, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1), (TF2, TF2, TF1), (TF3, TF2, TF1), (TF4, TF2, TF1), (TF0, TF3, TF1), (TF1, TF3, TF1), (TF2, TF3, TF1), (TF3, TF3, TF1), (TF4, TF3, TF1), (TF0, TF4, TF1), (TF1, TF4, TF1), (TF2, TF4, TF1), (TF3, TF4, TF1), (TF4, TF4, TF1)

7.4.15.1.2 Physical channel parameters

DPCH	Min spreading factor	4
Uplink	Max number of DPDCH data bits/radio frame	9600
	Puncturing Limit	1

7.4.15.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel		See 7.4.14.2.1.1	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel	6.10.2.4.1.2.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.4a.2.2 of [1] See NOTE.	

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH

7.4.16 RB for Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + RB for Streaming / unknown / UL:16 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + RB for Interactive or background / UL:128 DL: [max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps plus support for 'Maximum total number of transport blocks transmitted within TTIs that start at the same time' = 16 and 'Maximum number of TFC' = 128, DL on DPCH: 64 kbps plus support for 'Maximum number of AM entities' = 5 and 'Total RLC AM buffer size' = 50, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.16.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.1.4a.1.1.1 of [1] 6.10.2.4.1.58.1.1.1 of [1] 6.10.2.4.1.28.1.1.1 of [1]		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.16.1.1.5			
Physical Channel	See 7.4.16.1.2			

7.4.16.1.1 Transport channel parameters

7.4.16.1.1.1 Void

7.4.16.1.1.2 Void

7.4.16.1.1.3 Void

7.4.16.1.1.4 Void

7.4.16.1.1.5 TFCS

7.4.16.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	8
	Max number of DPDCH data bits/radio frame	4800
	Puncturing Limit	0.72

7.4.16.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-DPCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-DPCH
Transport Channel	6.10.2.4.1.4a.2.1.1 of [1]	See 7.4.14.2.1.1	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.4a.2.1.3 of [1]			
Physical Channel	6.10.2.4.1.4a.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.4a.2.2 of [1] See NOTE.	

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH

7.4.17 RB for Conversational / speech / UL:(12.2 7.95 5.9 4.75) DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + RB for Streaming / unknown / UL:128 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + RB for Interactive or background / UL:128 DL: [max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 384kbps plus support for 'Maximum number of TFC' = 256, DL on DPCH: 64 kbps plus support for 'Maximum number of AM entities' = 5 and 'Total RLC AM buffer size' = 50, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.17.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel	6.10.2.4.1.4a.1.1.1 of [1] See 7.1.96.1.1.2 6.10.2.4.1.28.1.1.1 of [1]		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.17.1.1.5			
Physical Channel	See 7.4.17.1.2			

7.4.17.1.1 Transport channel parameters

7.4.17.1.1.1 Void

7.4.17.1.1.2 Void

7.4.17.1.1.3 Void

7.4.17.1.1.4 Void

7.4.17.1.1.5 TFCS

TFCS size	240
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 128 kbps RAB, 128 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0,TF0), (TF3,TF2,TF0,TF0,TF0,TF0), (TF4,TF3,TF0,TF0,TF0,TF0), (TF5,TF4,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF0,TF1,TF0,TF0), (TF3,TF2,TF0,TF1,TF0,TF0), (TF4,TF3,TF0,TF1,TF0,TF0), (TF5,TF4,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF0,TF2,TF0,TF0), (TF3,TF2,TF0,TF2,TF0,TF0), (TF4,TF3,TF0,TF2,TF0,TF0), (TF5,TF4,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF0,TF3,TF0,TF0), (TF3,TF2,TF0,TF3,TF0,TF0), (TF4,TF3,TF0,TF3,TF0,TF0), (TF5,TF4,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF0,TF0,TF1,TF0), (TF3,TF2,TF0,TF0,TF1,TF0), (TF4,TF3,TF0,TF0,TF1,TF0), (TF5,TF4,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF0,TF1,TF1,TF0), (TF3,TF2,TF0,TF1,TF1,TF0), (TF4,TF3,TF0,TF1,TF1,TF0), (TF5,TF4,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF0,TF2,TF1,TF0), (TF3,TF2,TF0,TF2,TF1,TF0), (TF4,TF3,TF0,TF2,TF1,TF0), (TF5,TF4,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF0,TF3,TF1,TF0), (TF3,TF2,TF0,TF3,TF1,TF0), (TF4,TF3,TF0,TF3,TF1,TF0), (TF5,TF4,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF0,TF2,TF0), (TF2,TF1,TF0,TF0,TF2,TF0), (TF3,TF2,TF0,TF0,TF2,TF0), (TF4,TF3,TF0,TF0,TF2,TF0), (TF5,TF4,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF1,TF2,TF0), (TF1,TF0,TF0,TF1,TF2,TF0), (TF2,TF1,TF0,TF1,TF2,TF0), (TF3,TF2,TF0,TF1,TF2,TF0), (TF4,TF3,TF0,TF1,TF2,TF0), (TF5,TF4,TF1,TF1,TF2,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF0,TF2,TF1,TF0), (TF3,TF2,TF0,TF2,TF1,TF0), (TF4,TF3,TF0,TF2,TF1,TF0), (TF5,TF4,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF0,TF3,TF1,TF0), (TF3,TF2,TF0,TF3,TF1,TF0), (TF4,TF3,TF0,TF3,TF1,TF0), (TF5,TF4,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF0,TF3,TF0), (TF2,TF1,TF0,TF0,TF3,TF0), (TF3,TF2,TF0,TF0,TF3,TF0), (TF4,TF3,TF0,TF0,TF3,TF0), (TF5,TF4,TF1,TF0,TF3,TF0), (TF0,TF0,TF0,TF1,TF3,TF0), (TF1,TF0,TF0,TF1,TF3,TF0), (TF2,TF1,TF0,TF1,TF3,TF0), (TF3,TF2,TF0,TF1,TF3,TF0), (TF4,TF3,TF0,TF1,TF3,TF0), (TF5,TF4,TF1,TF1,TF3,TF0), (TF0,TF0,TF0,TF2,TF3,TF0), (TF1,TF0,TF0,TF2,TF3,TF0), (TF2,TF1,TF0,TF2,TF3,TF0), (TF3,TF2,TF0,TF2,TF3,TF0), (TF4,TF3,TF0,TF2,TF3,TF0), (TF5,TF4,TF1,TF2,TF3,TF0), (TF0,TF0,TF0,TF3,TF2,TF0), (TF1,TF0,TF0,TF3,TF2,TF0), (TF2,TF1,TF0,TF3,TF2,TF0), (TF3,TF2,TF0,TF3,TF2,TF0), (TF4,TF3,TF0,TF3,TF2,TF0), (TF5,TF4,TF1,TF3,TF2,TF0), (TF0,TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF0,TF4,TF0), (TF2,TF1,TF0,TF0,TF4,TF0), (TF3,TF2,TF0,TF0,TF4,TF0), (TF4,TF3,TF0,TF0,TF4,TF0), (TF5,TF4,TF1,TF0,TF4,TF0), (TF0,TF0,TF0,TF1,TF4,TF0), (TF1,TF0,TF0,TF1,TF4,TF0), (TF2,TF1,TF0,TF1,TF4,TF0), (TF3,TF2,TF0,TF1,TF4,TF0), (TF4,TF3,TF0,TF1,TF4,TF0), (TF5,TF4,TF1,TF1,TF4,TF0), (TF0,TF0,TF0,TF2,TF4,TF0), (TF1,TF0,TF0,TF2,TF4,TF0), (TF2,TF1,TF0,TF2,TF4,TF0), (TF3,TF2,TF0,TF2,TF4,TF0), (TF4,TF3,TF0,TF2,TF4,TF0), (TF5,TF4,TF1,TF2,TF4,TF0), (TF0,TF0,TF0,TF3,TF4,TF0), (TF1,TF0,TF0,TF3,TF4,TF0), (TF2,TF1,TF0,TF3,TF4,TF0), (TF3,TF2,TF0,TF3,TF4,TF0), (TF4,TF3,TF0,TF3,TF4,TF0), (TF5,TF4,TF1,TF3,TF4,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF0,TF1), (TF3,TF2,TF0,TF0,TF0,TF1), (TF4,TF3,TF0,TF0,TF0,TF1), (TF5,TF4,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF0,TF1,TF0,TF1), (TF3,TF2,TF0,TF1,TF0,TF1), (TF4,TF3,TF0,TF1,TF0,TF1), (TF5,TF4,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF0,TF2,TF0,TF1), (TF3,TF2,TF0,TF2,TF0,TF1), (TF4,TF3,TF0,TF2,TF0,TF1), (TF5,TF4,TF1,TF2,TF0,TF1),

	(TF0,TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF0,TF3,TF0,TF1), (TF3,TF2,TF0,TF3,TF0,TF1), (TF4,TF3,TF0,TF3,TF0,TF1), (TF5,TF4,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF0,TF0,TF1,TF1), (TF3,TF2,TF0,TF0,TF1,TF1), (TF4,TF3,TF0,TF0,TF1,TF1), (TF5,TF4,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF0,TF1,TF1,TF1), (TF3,TF2,TF0,TF1,TF1,TF1), (TF4,TF3,TF0,TF1,TF1,TF1), (TF5,TF4,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF0,TF2,TF1,TF1), (TF3,TF2,TF0,TF0,TF2,TF1), (TF4,TF3,TF0,TF0,TF2,TF1), (TF5,TF4,TF1,TF0,TF2,TF1), (TF0,TF0,TF0,TF1,TF2,TF1), (TF1,TF0,TF0,TF1,TF2,TF1), (TF2,TF1,TF0,TF1,TF2,TF1), (TF3,TF2,TF0,TF1,TF2,TF1), (TF4,TF3,TF0,TF1,TF2,TF1), (TF5,TF4,TF1,TF1,TF2,TF1), (TF0,TF0,TF0,TF2,TF2,TF1), (TF1,TF0,TF0,TF2,TF2,TF1), (TF2,TF1,TF0,TF2,TF2,TF1), (TF3,TF2,TF0,TF2,TF2,TF1), (TF4,TF3,TF0,TF2,TF2,TF1), (TF5,TF4,TF1,TF2,TF2,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF0,TF3,TF1,TF1), (TF3,TF2,TF0,TF3,TF1,TF1), (TF4,TF3,TF0,TF3,TF1,TF1), (TF5,TF4,TF1,TF3,TF1,TF1), (TF0,TF0,TF0,TF2,TF2,TF1), (TF1,TF0,TF0,TF2,TF2,TF1), (TF2,TF1,TF0,TF2,TF2,TF1), (TF3,TF2,TF0,TF2,TF2,TF1), (TF4,TF3,TF0,TF2,TF2,TF1), (TF5,TF4,TF1,TF2,TF2,TF1), (TF0,TF0,TF0,TF3,TF3,TF1), (TF1,TF0,TF0,TF3,TF3,TF1), (TF2,TF1,TF0,TF3,TF3,TF1), (TF3,TF2,TF0,TF3,TF3,TF1), (TF4,TF3,TF0,TF3,TF3,TF1), (TF5,TF4,TF1,TF3,TF3,TF1), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1), (TF2,TF1,TF0,TF4,TF1), (TF3,TF2,TF0,TF0,TF4,TF1), (TF4,TF3,TF0,TF0,TF4,TF1), (TF5,TF4,TF1,TF0,TF4,TF1), (TF0,TF0,TF0,TF1,TF4,TF1), (TF1,TF0,TF0,TF1,TF4,TF1), (TF2,TF1,TF0,TF1,TF4,TF1), (TF3,TF2,TF0,TF1,TF4,TF1), (TF4,TF3,TF0,TF1,TF4,TF1), (TF5,TF4,TF1,TF1,TF4,TF1), (TF0,TF0,TF0,TF2,TF4,TF1), (TF1,TF0,TF0,TF2,TF4,TF1), (TF2,TF1,TF0,TF2,TF4,TF1), (TF3,TF2,TF0,TF2,TF4,TF1), (TF4,TF3,TF0,TF2,TF4,TF1), (TF5,TF4,TF1,TF2,TF4,TF1), (TF0,TF0,TF0,TF3,TF4,TF1), (TF1,TF0,TF0,TF3,TF4,TF1), (TF2,TF1,TF0,TF3,TF4,TF1), (TF3,TF2,TF0,TF3,TF4,TF1), (TF4,TF3,TF0,TF3,TF4,TF1), (TF5,TF4,TF1,TF3,TF4,TF1)
--	---

7.4.17.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	4
	Max number of DPDCH data bits/radio frame	9600
	Puncturing Limit	0.88

7.4.17.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.4a.2.1.1 of [1]	See 7.4.14.2.1.1	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.4a.2.1.3 of [1]			
Physical Channel	6.10.2.4.1.4a.2.2 of [1] -> CS voice fehlt !	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.4a.2.2 of [1] See NOTE.	

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH

7.4.18 RB for Streaming / unknown / UL:64 DL: [max bit rate depending on UE category & RAB guaranteed/maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL on DPCH: 32 kbps plus support for HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.18.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	See 7.4.14.1.1.1		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.18.1.1			
Physical Channel	See 7.4.18.1.2			

7.4.18.1.1 Transport channel parameters

7.4.18.1.1.1 Void

7.4.18.1.1.2 Void

7.4.18.1.1.3 Void

7.4.18.1.1.4 TFCS

TFCS size	10
TFCS	(64 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

7.4.18.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	1

7.4.18.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.4a.2.1.1 of [1]	See 7.4.14.2.1.1	6.10.2.4.1.2.2.1.1 of [1]	

TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel	6.10.2.4.1.2.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.4a.2.2 of [1] See NOTE.	

NOTE: Already included in Physical Channel Definition of Radio Bearer on DPCH

7.4.19 RB for Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL on DPCH: 64 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.19.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel	6.10.2.4.1.9.1.1.1 of [1] 6.10.2.4.1.26.1.1.1 of [1]		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.19.1.1.1			
Physical Channel	See 7.4.19.1.2			

7.4.19.1.1 Transport channel parameters

7.4.19.1.1.1 TFCS

TFCS size	30
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0), (TF2,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0), (TF2,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF3,TF0), (TF2,TF1,TF0,TF3,TF0), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0), (TF2,TF1,TF0,TF4,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1), (TF2,TF1,TF0,TF2,TF1), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1), (TF2,TF1,TF0,TF3,TF1), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1), (TF2,TF1,TF0,TF4,TF1)

7.4.19.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.84

7.4.19.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.9.2.1.1 of [1]	6.10.2.4.5.1.2.1.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.9.1.1.3 of [1]			
Physical Channel	6.10.2.4.1.9.1.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.2.2.2 of [1]	

- 7.4.20 RB for Conversational / speech / UL:5.9 DL:5.9 kbps / CS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 'Maximum number of AM entities' = 5, DL on DPCH: 64kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11

This is supported in Release 5.

7.4.20.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	6.10.2.4.1.9.1.1.1 of [1] 6.10.2.4.1.38d.1.1.2 of [1]		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.20.1.1.1			
Physical Channel	See 7.4.20.1.2			

7.4.20.1.1 Transport channel parameters

7.4.20.1.1.1 TFCS

TFCS size	30
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 64 kbps RAB + 64 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0),(TF2,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF1,TF0),(TF2,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF2,TF0),(TF2,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF3,TF0), (TF1,TF0,TF0,TF3,TF0),(TF2,TF1,TF0,TF3,TF0), (TF0,TF0,TF0,TF4,TF0), (TF1,TF0,TF0,TF4,TF0),(TF2,TF1,TF0,TF4,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1),(TF2,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1),(TF2,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF2,TF1),(TF2,TF1,TF0,TF2,TF1), (TF0,TF0,TF0,TF3,TF1), (TF1,TF0,TF0,TF3,TF1),(TF2,TF1,TF0,TF3,TF1), (TF0,TF0,TF0,TF4,TF1), (TF1,TF0,TF0,TF4,TF1),(TF2,TF1,TF0,TF4,TF1)

7.4.20.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.84

7.4.20.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.9.2.1.1 of [1]	6.10.2.4.5.5.2.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.9.1.1.3 of [1]			
Physical Channel	6.10.2.4.1.9.1.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.2.2.2 of [1]	

7.4.21 RB for Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB + RB for Interactive or background / UL:64 DL:[max bit rate depending on the UE category & RAB max. bitrate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 'Maximum number of AM entities' = 5, DL on DPCH: 64 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.21.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel				

TFCS			
Physical Channel	6.10.2.4.1.38d.1 of [1].		

7.4.21.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-PDSCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-PDSCH
Transport Channel	6.10.2.4.1.4.2.1.1 of [1]	6.10.2.4.5.5.2.1.1 of [1]	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.4.2.1.3 of [1]			
Physical Channel	6.10.2.4.1.4.2.2 of [1]	6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.2.2.2 of [1]	

- 7.4.22 Conversational / unknown / UL:38.8 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + interactive / background UL: 16 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + interactive / background UL: 16 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.

The minimum UE classes supporting this combination are UL: 64 kbps plus support of "Maximum number of TFC"=64, DL: 32 kbps, plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 6.

7.4.22.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel	7.1.118.1.1.1 7.1.84.1.1.1		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.22.1.1			
Physical Channel	See 7.4.22.1.2			

7.4.22.1.1 TFCS

TFCS size	54
TFCS	(38.8 kbps Conversational RAB, 16+16 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF2, TF2, TF0), (TF3, TF2, TF0), (TF4, TF2, TF0), (TF5, TF2, TF0), (TF6, TF2, TF0), (TF7, TF2, TF0), (TF8, TF2, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1), (TF2, TF2, TF1), (TF3, TF2, TF1), (TF4, TF2, TF1), (TF5, TF2, TF1), (TF6, TF2, TF1), (TF7, TF2, TF1), (TF8, TF2, TF1)

7.4.22.1.2 Physical channel parameters

DPCH Uplink	Min spreading factor	16
	Max number of DPDCH data bits/radio frame	2400
	Puncturing Limit	0.96

7.4.22.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-DPCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-DPCH
Transport Channel		See 7.4.22.2.1.1	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel		6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.2.2.2 of [1]	

7.4.22.2.1 Transport channel parameters

7.4.22.2.1.1 Transport channel parameters for HS-DSCH

7.4.22.2.1.1.1 MAC-d flow parameters for conversational / unknown DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB

Higher Layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	104, 136, 152, 168, 184, 216, 288, 336
	Max data rate, bps	depends on UE category NOTE1
	UMD PDU header, bit	8
MAC	MAC-d header, bit	0
	MAC multiplexing	N/A
	MAC-d PDU size, bit	112, 144, 160, 176, 192, 224, 296, 344
	MAC-hs header fixed part, bit	21
Layer 1	TrCH type	HS-DSCH
	TTI	2 ms
	Coding type	TC
	CRC, bit	24

NOTE1: The peak throughput may be limited by the maximum number of MAC-d PDUs that can be included in a single MAC-hs PDU (see [25.321]).

7.4.22.2.1.1.2 MAC-d flow parameters for interactive or background DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB

See subclause 6.10.2.4.5.1.2.1.1.1 of [1].

7.4.22.2.1.1.3 MAC-d flow parameters for interactive or background DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB

See subclause 6.10.2.4.5.1.2.1.1.1 of [1].

7.4.23 Conversational / unknown / UL:16.8 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + interactive / background UL: 16 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + interactive / background UL: 16 kbps DL:[max bit rate depending on UE category & RAB maximum bit rate] / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.

The minimum UE classes supporting this combination are UL: 64 kbps plus support of "Maximum number of TFC"=128, DL: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 6.

NOTE: This RAB is used for the steady-state, where the contexts of the ROHC compressor and the ROHC decompressor are already synchronized so IR packets are not transmitted.

7.4.23.1 Uplink

	Radio Bearer on DPCH	<i>(reserved for Radio Bearer on E-DPCH)</i>	Signalling Radio Bearer on DPCH	<i>(reserved for Signalling Radio Bearer on E-DPCH)</i>
Transport Channel	7.1.119.1.1.1 7.1.84.1.1.1		6.10.2.4.1.2.1.1.1 of [1]	
TFCS	See 7.4.23.1.1			
Physical Channel	See 7.4.23.1.2			

7.4.23.1.1 TFCS

TFCS size	108
TFCS	(16.8 kbps Conversational RAB, 16+16 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF3, TF0, TF0), (TF4, TF0, TF0), (TF5, TF0, TF0), (TF6, TF0, TF0), (TF7, TF0, TF0), (TF8, TF0, TF0), (TF9, TF0, TF0), (TF10, TF0, TF0), (TF11, TF0, TF0), (TF12, TF0, TF0), (TF13, TF0, TF0), (TF14, TF0, TF0), (TF15, TF0, TF0), (TF16, TF0, TF0), (TF17, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF3, TF1, TF0), (TF4, TF1, TF0), (TF5, TF1, TF0), (TF6, TF1, TF0), (TF7, TF1, TF0), (TF8, TF1, TF0), (TF9, TF1, TF0), (TF10, TF1, TF0), (TF11, TF1, TF0), (TF12, TF1, TF0), (TF13, TF1, TF0), (TF14, TF1, TF0), (TF15, TF1, TF0), (TF16, TF1, TF0), (TF17, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF2, TF2, TF0), (TF3, TF2, TF0), (TF4, TF2, TF0), (TF5, TF2, TF0), (TF6, TF2, TF0), (TF7, TF2, TF0), (TF8, TF2, TF0), (TF9, TF2, TF0), (TF10, TF2, TF0), (TF11, TF2, TF0), (TF12, TF2, TF0), (TF13, TF2, TF0), (TF14, TF2, TF0), (TF15, TF2, TF0), (TF16, TF2, TF0), (TF17, TF2, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF3, TF0, TF1), (TF4, TF0, TF1), (TF5, TF0, TF1), (TF6, TF0, TF1), (TF7, TF0, TF1), (TF8, TF0, TF1), (TF9, TF0, TF1), (TF10, TF0, TF1), (TF11, TF0, TF1), (TF12, TF0, TF1), (TF13, TF0, TF1), (TF14, TF0, TF1), (TF15, TF0, TF1), (TF16, TF0, TF1), (TF17, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1), (TF3, TF1, TF1), (TF4, TF1, TF1), (TF5, TF1, TF1), (TF6, TF1, TF1), (TF7, TF1, TF1), (TF8, TF1, TF1), (TF9, TF1, TF1), (TF10, TF1, TF1), (TF11, TF1, TF1), (TF12, TF1, TF1), (TF13, TF1, TF1), (TF14, TF1, TF1), (TF15, TF1, TF1), (TF16, TF1, TF1), (TF17, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1), (TF2, TF2, TF1), (TF3, TF2, TF1), (TF4, TF2, TF1), (TF5, TF2, TF1), (TF6, TF2, TF1), (TF7, TF2, TF1), (TF8, TF2, TF1), (TF9, TF2, TF1), (TF10, TF2, TF1), (TF11, TF2, TF1), (TF12, TF2, TF1), (TF13, TF2, TF1), (TF14, TF2, TF1), (TF15, TF2, TF1), (TF16, TF2, TF1), (TF17, TF2, TF1)

7.4.23.1.2 Physical channel parameters

DPCN	Min spreading factor	32
Uplink	Max number of DPDCH data bits/radio frame	1200
	Puncturing Limit	0.88

7.4.23.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-DPCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-DPCH
Transport Channel		See 7.4.22.2.1.1	6.10.2.4.1.2.2.1.1 of [1]	
TFCS	6.10.2.4.1.2.2.1.2 of [1]			
Physical Channel		6.10.2.4.5.1.2.2.2 of [1]	6.10.2.4.1.2.2.2 of [1]	

7.4.24 Conversational / speech / UL:(12.65 8.85 6.6) DL:(12.65 8.85 6.6) kbps / CS RAB + Interactive or Background / UL:384 DL:[Bit rate depending on the UE category] / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH + DL:0.15 kbps SRB#5 for DCCH

The minimum UE classes supporting this combination are UL: 384 kbps, DL on DPCH: 32 kbps plus support of HS-PDSCH, DL on HS-PDSCH: category 11.

This is supported in Release 5.

7.4.24.1 Uplink

	Radio Bearer on DPCH	(reserved for Radio Bearer on E-DPCH)	Signalling Radio Bearer on DPCH	(reserved for Signalling Radio Bearer on E-DPCH)
Transport Channel		6.10.2.4.5.8.1 of [1]		
TFCS				
Physical Channel				

7.4.24.2 Downlink

	Radio Bearer on DPCH	Radio Bearer on HS-DPCH	Signalling Radio Bearer on DPCH	Signalling Radio Bearer on HS-DPCH
Transport Channel		6.10.2.4.5.8.2 of [1]		
TFCS				
Physical Channel				

8 Examples of Radio Bearers and Signalling Radio Bearers for 3.84 Mcps TDD

NOTE: The physical channel parameters were chosen for each RAB because they are typical for the targeted UE class to support the particular RAB. However based on current radio conditions UEs shall expect to be configured to use any timeslot/code/spreading factors combinations that support the RAB and are supported by that UE's physical capabilities.

8.1 Combinations on DPCH

8.1.1 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.3.4.1.1 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.2 Stand-alone UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.3 Stand-aloneUL:13.6 DL:13.6 kbps SRBs for DCCH

See subclause 6.10.3.4.1.3 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.4 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.4 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.5 Conversational / speech / UL:10.2 DL:10.2 kbps / CS RAB + UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.5 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.6 Conversational / speech / UL:7.95 DL:7.95 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.6 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.7 Conversational / speech / UL:7.4 DL:7.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.7 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.8 Conversational / speech / UL:6.7 DL: 6.7 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.8 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.9 Conversational / speech / UL:5.9 DL:5.9 kbps / CS rab + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.9 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.10 Conversational / speech / UL:5.15 DL:5.15 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.3.4.1.10 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.11 Conversational / speech / UL:4.75 DL:4.75 kbps / CS RAB + UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.10.3.4.1.11 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.12 Conversational / unknown / UL:28.8 DL:28.8kbps / CS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH

See subclause 6.10.3.4.1.12 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.13 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.13 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

8.1.14 Conversational / unknown / UL:32 DL: 32 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.14 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.15 Streaming / unknown / UL:14.4 DL:14.4 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.15 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.16 Streaming / unknown / UL:28.8 DL:28.8 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.16 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.17 Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.17 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

8.1.18 Streaming / unknown / UL:0 DL: 64 kbps / CS or PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

Void.

8.1.19 Streaming / unknown / UL: 64 DL:0 kbps / CS or PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

Void

8.1.20 Interactive or background / UL: 32 DL:8 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.23 of [1].

The minimum UE classes supporting this combination are UL: 32kbps ; DL: 32kbps. The minimum UE class to support the alternative UL configuration is UL: 32kbps plus support for 8 TB/TTI

This is supported in Release '99.

8.1.21 Interactive or background / UL: 64 DL: 8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

Void.

8.1.22 Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.25 of [1].

The minimum UE classes supporting this combination are UL: 32kbps ; DL: 64kbps. The minimum UE class to support the alternative UL configuration is UL: 32kbps plus support for 8 TB/TTI.

This is supported in Release '99.

8.1.23 Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.26 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 64kbps . The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

8.1.24 Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.27 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 128kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

8.1.25 Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.28 of [1].

The minimum UE classes supporting this combination are UL: 128kbps; DL: 128kbps. The minimum UE class to support the alternative UL configuration is UL: 128kbps plus support for 32 TB/TTI.

This is supported in Release '99.

8.1.26 Interactive or background / UL:64 DL:144 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.29 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 128kbps.

This is supported in Release '99.

8.1.27 Interactive or background / UL: 144 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.30 of [1].

The minimum UE classes supporting this combination are UL: 128kbps plus support for maximum 16 TBs per TTI; DL: 128kbps.

This is supported in Release '99.

8.1.28 Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.31 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 384kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

8.1.29 Interactive or background / UL: 64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.32 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 384kbps. The minimum UE class to support the alternative DL configuration is DL: 768kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

8.1.30 Interactive or background / UL:128 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.33 of [1].

The minimum UE classes supporting this combination are UL: 128kbps; DL: 384kbps. The minimum UE class to support the alternative DL configuration is DL: 768kbps. The minimum UE class to support the alternative UL configuration is UL: 128kbps plus support for 16 TB/TTI.

This is supported in Release '99.

8.1.31 Interactive or background / UL:384 DL:384 kbps / PS RAB +UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.34 of [1].

The minimum UE classes supporting this combination are UL: 384kbps; DL: 384kbps. The minimum UE class to support the alternative DL configuration is DL 768 kbps. The minimum UE class to support the alternative UL physical configuration 2 is UL 768 kbps.

This is supported in Release '99.

8.1.32 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.35 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 2048kbps. The minimum UE class to support the alternative DL configuration is 2048kbps plus support for maximum TB bits 81920 and maximum TC TB bits 81920. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

8.1.33 Interactive or background / UL:128 DL:2048 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

Void.

8.1.34 Interactive or background / UL: 384 DL:2048 kbps / PS RAB+UL:3.4 DL:3.4 kbps SRBs for DCCH

Void.

8.1.35 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.38 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

8.1.36 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:32 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.39 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

8.1.37 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.40 of [1].

The minimum UE classes supporting this combination are UL: 64kbps ; DL: 64kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

**8.1.38 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.41 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 128 kbps.

This is supported in Release '99.

**8.1.39 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.42 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 384kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

**8.1.40 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.43 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 384 kbps plus. The minimum UE class to support the alternative DL configuration is DL: 768kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

**8.1.41 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Interactive or background / UL:128 DL:2048 kbps / PS RAB +
UL:3.4 DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.44 of [1].

The minimum UE classes supporting this combination are UL: 384kbps plus support for 2 physical channels per TS; DL: 2048 kbps plus support for maximum TB bits 40960, maximum TC TB bits 40960, or if an alternative RAB is used, plus support for maximum TB bits 81920 and maximum TB TC bits 81920.

This is supported in Release '99.

**8.1.42 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Streaming / unknown / UL:57.6 DL:57.6 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.45 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps.

This is supported in Release '99.

- 8.1.43 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

Void.

- 8.1.44 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.49 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64kbps

This is supported in Release '99.

- 8.1.45 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.50 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 128 kbps.

This is supported in Release '99

- 8.1.46 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.51 of [1].

The minimum UE classes for this combinations are UL: 64 kbps; DL: 128kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

- 8.1.47 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Interactive or background / UL:64 DL:128 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.52 of [1].

The minimum UE classes for this combination are UL: 64 kbps ; DL: 384kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB/TTI.

This is supported in Release '99.

- 8.1.48 Conversational / unknown / UL:64 DL:64 kbps / CS RAB +
Interactive or background / UL:128 DL:128 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH**

See subclause 6.10.3.4.1.53 of [1].

The minimum UE classes for this combination are UL: 384kbps; DL: 384kbps. The minimum UE class to support the alternative UL configuration is UL: 384kbps plus support for 32 TB/TTI.

This is supported in Release '99.

8.1.49 Interactive or background / UL:64 DL:128 kbps / PS RAB + streaming / unknown / UL:0 DL:64 kbps / CS or PS RAB + UL:3.4 DL:3.4kbps SRBs for DCCH

Void.

8.1.50 Conversational / Speech UL:(12.2-7.95-5.9-4.75) & DL:(12.2-7.95-5.9-4.75) CS RAB + UL:3.4 & DL 3.4kbps SRBs for DCCH

See subclause 6.10.3.4.1.4a of [1].

The minimum UE classes for this combination are UL: 32 kbps; DL: 32 kbps.

This is supported in Release '99.

8.1.51 Conversational / Speech UL:(10.2-6.7-5.9-4.75) & DL:(10.2-7.95-5.9-4.75) CS RAB + UL:3.4 & DL 3.4kbps SRBs for DCCH

See subclause 6.10.3.4.1.5a of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.52 Conversational / Speech UL:(7.4-6.7-5.9-4.75) & DL:(7.4-6.7-5.9-4.75) CS RAB + UL:3.4 & DL 3.4kbps SRBs for DCCH

See subclause 6.10.3.4.1.7a of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.53 Interactive or Background UL:8 & DL:8kbps PS RAB + UL:3.4 & DL:3.4 SRBs for DCCH

See subclause 6.10.3.4.1.23a of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps. The minimum UE class to support the alternative UL configuration is UL: 32kbps plus support for 8 TB/TTI.

This is supported in Release '99.

8.1.54 Interactive or Background UL:16 & DL:16kbps PS RAB + UL:3.4 & DL:3.4 SRBs for DCCH

See subclause 6.10.3.4.1.23b of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps. The minimum UE class to support the alternative UL configuration is UL: 32kbps plus support for 8 TB/TTI.

This is supported in Release '99.

8.1.55 Interactive or Background UL:32 & DL:32kbps PS RAB + UL:3.4 & DL:3.4 SRBs for DCCH

See subclause 6.10.3.4.1.23c of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

8.1.56 Interactive or Background UL:32 & DL:32kbps PS RAB (20msTTI) + UL:3.4 & DL:3.4 SRBs for DCCH

See subclause 6.10.3.4.1.23d of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps. The minimum UE class to support the alternative UL configuration is UL: 32kbps plus support for 8 TB/TTI.

This is supported in Release '99.

8.1.57 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.38a of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps.

This is supported in Release '99.

8.1.58 Conversational / Speech UL:12.2 & DL:12.2kbps CS RAB + Interactive or Background UL:8 & DL:8kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH

See subclause 6.10.3.4.1.38b of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps.

This is supported in Release '99.

8.1.59 Conversational / Speech UL:12.2 & DL:12.2kbps CS RAB + Interactive or Background UL:32 & DL:32kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH

See subclause 6.10.3.4.1.38c of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

8.1.60 Conversational / Speech UL:12.2 & DL:12.2kbps CS RAB + Interactive or Background UL:64 & DL:64kbps PS RAB + Interactive or Background UL:64 & DL:64kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH

See subclause 6.10.3.4.1.38d of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM mode entities, DL: 64 kbps plus support for 5 AM mode entities. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB per TTI and support for 5 AM mode entities.

This is supported in Release '99.

8.1.61 Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:0 & DL:0kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH

See subclause 6.10.3.4.1.38e of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps.

This is supported in Release '99.

8.1.62 Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:8 & DL:8kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH

See subclause 6.10.3.4.1.38f of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps.

This is supported in Release '99.

8.1.63 Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:16 & DL:16kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH

See subclause 6.10.3.4.1.38g of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

8.1.64 Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:32 & DL:32kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH

See subclause 6.10.3.4.1.38h of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 32 kbps..

This is supported in Release '99.

8.1.65 Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75)kbps CS RAB + Interactive or Background UL:64 & DL:64kbps PS RAB + UL3.4 & DL:3.4kbps SRB"s for DCCH

See subclause 6.10.3.4.1.38i of [1].

The minimum UE classes supporting this combination are UL: 64 kbps + 48 Configured TFCs, DL: 64 kbps + 64 Configured TFCs. The minimum UE class to support the alternative UL configuration is UL: 64kbps plus support for 16 TB per TTI and 48 Configured TFCs.

This is supported in Release '99.

- 8.1.66 Conversational / Speech UL:(12.2 7.95 5.9 4.75) & DL:(12.2 7.95 5.9 4.75) kbps CS RAB + Interactive or Background UL:64 & DL:128 kbps PS RAB + UL:3.4 & DL:3.4 kbps SRB's for DCCH**

See subclause 6.10.3.4.1.38j of [1].

The minimum UE classes supporting this combination are UL: 64 kbps + 48 Configured TFCs, DL: 128 kbps.. The minimum UE class to support the alternative UL configuration is UL: 64 kbps plus support for 16 TB per TTI and 48 Configured TFCs.

This is supported in Release '99.

- 8.1.67 Conversational / speech / UL:(12.2 7.95 5.9 4.75) kbps DL:(12.2 7.95 5.9 4.75) kbps / CS RAB + Conversational / unknown / UL:64 DL:64 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.**

See subclause 6.10.3.4.1.49a of [1].

The minimum UE classes supporting this combination are UL:64 kbps; DL:64 kbps.

This is supported in Release '99.

- 8.1.68 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.**

See subclause 6.10.3.4.1.51a of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release '99.

- 8.1.69 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.**

See subclause 6.10.3.4.1.51b of [1].

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps.

This is supported in Release '99.

- 8.1.70 Interactive or background / UL:8 DL:8 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH.**

See subclause 6.10.3.4.1.56 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps plus support for 5 AM entities, DL: 32 kbps plus support for 5 AM entities. The minimum UE class to support the alternative UL configuration is UL: 32 kbps plus support for 5 AM mode entities and 8 TB per TTI.

This is supported in Release '99.

**8.1.71 Interactive or background / UL:64 DL:64 kbps / PS RAB +
Interactive or background / UL:64 DL:64 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH.**

See subclause 6.10.3.4.1.57 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM mode entities; DL: 64 kbps plus support for 5 AM mode entities. The minimum UE class to support the alternative UL configuration is UL: 64 kbps plus support for 5 AM mode entities and 16 TB per TTI.

This is supported in Release '99.

**8.1.72 Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or
background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs
for DCCH.**

See subclause 6.10.3.4.1.58 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM mode entities; DL: 64 kbps plus support for 5 AM mode entities.

This is supported in Release '99.

**8.1.72a Streaming / unknown / UL:16 DL:64 kbps / PS RAB + Interactive or
background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs
for DCCH – Alternative**

This configuration optimises the flexibility of the Transport Format Selection by adding an omitted Transport Format, to the transport channel parameters given in the reference subclause 6.10.3.4.1.58 of [1], for the downlink, transport channel Streaming / unknown / DL:64 kbps PS RAB.

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM mode entities; DL: 64 kbps plus support for 5 AM mode entities.

This is supported in Release "99."

8.1.72a.1 Uplink

See subclause 6.10.3.4.1.58.1 of [1]

8.1.72a.2 Downlink

8.1.72a.2.1 Transport channel parameters

8.1.72a.2.1.1 Transport channel parameters for Streaming / unknown / DL:64 kbps / PS RAB

Higher layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		AM
	Payload sizes, bit		640
	Max data rate, bps		64000
	AM PDU header, bit		16
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		656
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	3x656
		TF4, bits	4x656
	TTI, ms		40
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		8076
	Max number of bits/radio frame before rate matching		2019
	RM attribute		125-165

8.1.72a.2.1.2 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23.2.1.2 of [1].

8.1.72a.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.72a.2.1.4 TFCS

TFCS size	20
TFCS	(64 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF4,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF4,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF4,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1), (TF4,TF1,TF1),

8.1.72a.2.2 Physical channel parameters

DPCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 6 codes x 1 time slot
	Max. Number of data bits/radio frame	1640 bits
	TFCI code word	16 bits
	Puncturing limit	0.64

8.1.73 Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.61 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps; DL: 32 kbps.

This is supported in Release '99.

8.1.74 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH (Multiframe)

See subclause 6.10.3.4.1.1a of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.75 Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM mode entities; DL: 128kbps.

This is supported in Release '99.

8.1.75.1 Uplink

See subclause 6.10.3.4.1.58.1 of [1]

8.1.75.2 Downlink

8.1.75.2.1 Transport channel parameters

8.1.75.2.1.1 Transport channel parameters for Streaming / unknown / DL:128 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	640
	Max data rate, bps	128000
	UM PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	656
	TFS	0x656
		1x656
		2x656
		3x656
		4x656
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	8076
	Max number of bits/radio frame before rate matching	4038
	RM attribute	125-165

8.1.75.2.1.2 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23.2.1.1 of [1].

8.1.75.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.75.2.1.4 TFCS

TFCS size	20
TFCS	(128 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF4,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF4,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF4,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1), (TF4,TF1,TF1),

8.1.75.2.2 Physical channel parameters

DPCCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 5 codes x 2 time slot
	Max. Number of data bits/radio frame	2744 bits
	TFCI code word	16 bits
	Puncturing limit	0.60

8.1.76 Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:8 kbps / PS RAB – TF0 contains zero Transport Blocks.

NOTE: Conversational / unknown / DL:8 kbps / PS RAB – TF0 contains zero Transport Blocks.

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps.

This is supported in Release '99.

8.1.76.1 Uplink

8.1.76.1.1 Transport channel parameters

8.1.76.1.1.1 Transport channel parameters for Conversational / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	8000
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	328
	TFS	TF0, bits
		0x328
		TF1, bits
		1x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1044
	Max number of bits/radio frame before rate matching	261
	RM attribute	135-175

8.1.76.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23a.1.1.1 of [1]

8.1.76.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1]

8.1.76.1.1.4

TFCS

TFCS size	8 (alt. 12)
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1) (alt. (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1))

8.1.76.1.2

Physical channel parameters

DPCH Uplink	Midamble	512 chips
	Codes and time slots	SF8 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	452 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.68 (alt. 0.64)

8.1.76.2

Downlink

8.1.76.2.1

Transport channel parameters

8.1.76.2.1.1

Transport channel parameters for Conversational / unknown / DL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	8000
	AMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	328
	TFS	0x328
	TF0, bits	1x328
	TF1, bits	
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1044
	Max number of bits/radio frame before rate matching	261
	RM attribute	135-175

8.1.76.2.1.2

Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23.2.1.2 of [1].

8.1.76.2.1.3

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1]

8.1.76.2.1.4

TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

8.1.76.2.2

Physical channel parameters

DPCH Downlink	Midamble	512 chips
	Codes and time slots	SF16 x 3 codes x 1 time slot
	Max. Number of data bits/radio frame	716 bits
	TFCI code word	16 bits
	Puncturing limit	0.96

8.1.77 Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:8 kbps / PS RAB – TF0 contains one Transport Block of zero size.

NOTE: Conversational / unknown / DL:8 kbps / PS RAB – TF0 contains one Transport Block of zero size.

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps.

This is supported in Release '99.

8.1.77.1 Uplink

8.1.77.1.1 Transport channel parameters

8.1.77.1.1.1 Transport channel parameters for Conversational / unknown / UL:8 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	8000
	UMD PDU header, bit	8
	MAC header, bit	0
MAC	MAC multiplexing	N/A
	TrCH type	DCH
Layer 1	TB sizes, bit	0, 328
	TFS	TF0, bits
		1x0
		1x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1044
	Max number of bits/radio frame before rate matching	261
	RM attribute	135-175

8.1.77.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23a.1.1.2 of [1]

8.1.77.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1]

8.1.77.1.1.4

TFCS

TFCS size	8 (alt. 12)
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1) (alt. (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF2, TF0), (TF1, TF2, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF0, TF2, TF1), (TF1, TF2, TF1))

8.1.77.1.2

Physical channel parameters

DPCH Uplink	Midamble	512 chips
	Codes and time slots	SF8 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	452 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.68 (alt. 0.64)

8.1.77.2

Downlink

8.1.77.2.1

Transport channel parameters

8.1.77.2.1.1

Transport channel parameters for Conversational / unknown / DL:8 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	8000
	AMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	0, 328
	TFS	1x0
		1x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1044
	Max number of bits/radio frame before rate matching	261
	RM attribute	135-175

8.1.77.2.1.2

Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23.2.1.2 of [1].

8.1.77.2.1.3

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1]

8.1.77.2.1.4

TFCS

TFCS size	8
TFCS	(8 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1)

8.1.77.2.2

Physical channel parameters

DPCH Downlink	Midamble	512 chips
	Codes and time slots	SF16 x 3 codes x 1 time slot
	Max. Number of data bits/radio frame	716 bits
	TFCI code word	16 bits
	Puncturing limit	0.72

8.1.78 Conversational / unknown / UL:16 kbps / PS RAB + Interactive or Background / UL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:16 kbps / PS RAB – TF0 contains zero Transport Blocks.

NOTE: Conversational / unknown / DL:16 kbps / PS RAB – TF0 contains zero Transport Blocks.

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps.

This is supported in Release '99.

8.1.78.1 Uplink

8.1.78.1.1 Transport channel parameters

8.1.78.1.1.1 Transport channel parameters for Conversational / unknown / UL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	16000
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	328
	TFS TF0, bits	0x328
	TF1, bits	1x328
	TF2, bits	2x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2076
	Max number of bits/radio frame before rate matching	519
	RM attribute	135-175

8.1.78.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23a.1.1.1 of [1]

8.1.78.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1]

8.1.78.1.1.4

TFCS

TFCS size	12 (alt 18)
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1) (alt ((TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF2, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF0, TF2, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF2, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF1, TF2, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF2, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1), (TF2, TF2, TF1))

8.1.78.1.2

Physical channel parameters

DPCH Uplink	Midamble	512 chips
	Codes and time slots	SF4 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	904 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.96 (alt. 0.92)

8.1.78.2

Downlink

8.1.78.2.1

Transport channel parameters

8.1.78.2.1.1

Transport channel parameters for Conversational / unknown / DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	16000
	AMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	328
	TFS	0x328
		1x328
		2x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2076
	Max number of bits/radio frame before rate matching	519
	RM attribute	135-175

8.1.78.2.1.2

Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1. 23.2.1.1 of [1]

8.1.78.2.1.3

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1]

8.1.78.2.1.4 TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

8.1.78.2.2 Physical channel parameters

DPCH Downlink	Midamble	512 chips
	Codes and time slots	SF16 x 3 codes x 1 time slot
	Max. Number of data bits/radio frame	716 bits
	TFCI code word	16 bits
	Puncturing limit	0.72

8.1.79 Conversational / unknown / UL:16 kbps / PS RAB +
Interactive or Background / UL:8 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

NOTE: Conversational / unknown / UL:16 kbps / PS RAB – TF0 contains one Transport Block of zero size.

NOTE: Conversational / unknown / DL:16 kbps / PS RAB – TF0 contains one Transport Block of zero size.

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps. The minimum UE class to support the alternative UL configuration is UL: 64kbps.

This is supported in Release '99.

8.1.79.1 Uplink

8.1.79.1.1 Transport channel parameters

8.1.79.1.1.1 Transport channel parameters for Conversational / unknown / UL:16 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	16000
	UMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	0, 328
	TFS	TF0, bits
		1x0
		TF1, bits
		1x328
		TF2, bits
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2076
	Max number of bits/radio frame before rate matching	519
	RM attribute	135-175

8.1.79.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23a.1.1.1 of [1]

8.1.79.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1]

8.1.79.1.1.4 TFCS

TFCS size	12 (alt 18)
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1) (alt. ((TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF2, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF0, TF2, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF2, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF2, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1), (TF2, TF1, TF1)))

8.1.79.1.2 Physical channel parameters

DPCCH Uplink	Midamble	512 chips
	Codes and time slots	SF4 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	904bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.96 (alt. 0.92)

8.1.79.2 Downlink

8.1.79.2.1 Transport channel parameters

8.1.79.2.1.1 Transport channel parameters for Conversational / unknown / DL:16 kbps / PS RAB

NOTE: In case of using this alternative, CRC parity bits are to be attached every time since number of TrBlks are 1 even if there is no data on the RAB (see subclause 4.2.1.1 in [3]).

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	UM
	Payload sizes, bit	320
	Max data rate, bps	16000
	AMD PDU header, bit	8
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	0, 328
	TFS	1x0
		1x328
		2x328
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2076
	Max number of bits/radio frame before rate matching	519
	RM attribute	135-175

8.1.79.2.1.2 Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23.2.1.1 of [1]

8.1.79.2.1.3 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1]

8.1.79.2.1.4

TFCS

TFCS size	12
TFCS	(16 kbps Conversational RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

8.1.79.2.2

Physical channel parameters

DPCH Downlink	Midamble	512 chips
	Codes and time slots	SF16 x 3 codes x 1 time slot
	Max. Number of data bits/radio frame	716 bits
	TFCI code word	16 bits
	Puncturing limit	0.72

8.1.80 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + Interactive or Background / UL:0 DL:0 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 32kbps plus support for 5 AM mode entities, DL: 32kbps plus support for 5 AM mode entities.

This is supported in Release '99.

8.1.80.1 Uplink

8.1.80.1.1 Transport channel parameters

8.1.80.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.3.4.1.4.1.1.1 of [1].

8.1.80.1.1.2 Transport channel parameters for Interactive or Background / UL:0 + UL:0 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	0	0
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS TF0, bits	0x340	
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	0	
	Max number of bits/radio frame before rate matching	0	
	RM attribute	130-170	

8.1.80.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1].

8.1.80.1.1.4

TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0+0kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1)

8.1.80.1.2

Physical channel parameters

DPCCH Uplink	Midamble	512 chips
	Codes and time slots	SF8 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	452 bits
	TFCI code word	16 bits
	TPC	2 bit
	Puncturing Limit	0.68

8.1.80.2

Downlink

8.1.80.2.1

Transport channel parameters

8.1.80.2.1.1

Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.3.4.1.4.2.1.1 of [1].

8.1.80.2.1.2

Transport channel parameters for Interactive or Background / DL:0 + DL:0 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	0	0
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS TF0, bits	0x340	
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	0	
	Max number of bits/radio frame before rate matching	0	
	RM attribute	130-170	

8.1.80.2.1.3

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.80.2.1.4 TFCS

TFCS size	6
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 0+0kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF1)

8.1.80.2.2 Physical channel parameters

DPCH Downlink	Midamble	512 chips
	Codes and time slots	SF16 x 2 codes x 1 time slot
	Max. Number of data bits/radio frame	472 bits
	TFCI code word	16 bits
	Puncturing limit	0.68

8.1.81 Conversational / unknown / UL:64 DL:64 kbps / CS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64 kbps.

This is supported in Release '99.

8.1.81.1 Uplink

8.1.81.1.1 Transport channel parameters

8.1.81.1.1.1 Transport channel parameters for Conversational / unknown / UL:64 kbps / CS RAB

See subclause 6.10.3.4.1.13.1.1.1 of [1].

8.1.81.1.1.2 Transport channel parameters for Interactive or Background / UL:8 + UL:8 kbps / PS RAB

See subclause 6.10.3.4.1.56.1.1.1 of [1]

8.1.81.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1].

8.1.81.1.1.4

TFCS

TFCS size	8 (alt. 12)
TFCS	(64 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1) (alt. (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF2, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF0, TF2, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF2, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF1, TF2, TF1))

8.1.81.1.2

Physical channel parameters

DPCH Uplink	Midamble	256 chips
	Codes and time slots	SF4 x 1 code x 1 time slot SF8 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	1584 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.60(alt. 0.56)

8.1.81.2

Downlink

8.1.81.2.1

Transport channel parameters

8.1.81.2.1.1

Transport channel parameters for Conversational / unknown / DL:64 kbps / CS RAB

See subclause 6.10.3.4.1.13.2.1.1 of [1].

8.1.81.2.1.2

Transport channel parameters for Interactive or Background / DL:8 + DL:8 kbps / PS RAB

See subclause 6.10.3.4.1.56.2.1.1 of [1]

8.1.81.2.1.3

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.81.2.1.4

TFCS

TFCS size	8
TFCS	(64 kbps Conversational RAB, 8+8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

8.1.81.2.2

Physical channel parameters

DPCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 6 codes x 1 time slot
	Max. Number of data bits/radio frame	1640 bits
	TFCI code word	16 bits
	Puncturing limit	0.60

8.1.82

Streaming / unknown / UL:8 DL:16 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

8.1.82.1 Uplink

8.1.82.1.1 Transport channel parameters

8.1.82.1.1.1 Transport channel parameters for Streaming / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320
	Max data rate, bps	8000
	AMD PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	336
	TFS	0x336
		1x336
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1068
	Max number of bits/radio frame before rate matching	267
	RM attribute	135-175

8.1.82.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.2.23a.1.1.2 of [1]

8.1.82.1.1.3 Transport channel parameters for UL: 3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.2.2.1.1.1 of [1]

8.1.82.1.1.4

TFCS

TFCS size	8 (alt 12)
TFCS	(8 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1) (alt. ((TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF2, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF0, TF2, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF2, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF1, TF2, TF1)))

8.1.82.1.2

Physical channel parameters

DPCCH Uplink	Midamble	512 chips
	Codes and time slots	SF8 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	452 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.64

8.1.82.2

Downlink

8.1.82.2.1

Transport channel parameters

8.1.82.2.1.1

Transport channel parameters for Streaming / unknown / DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	640
	Max data rate, bps	16000
	AMD PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	656
	TFS	0x656
		1x656
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2028
	Max number of bits/radio frame before rate matching	507
	RM attribute	125-165

8.1.82.2.1.2

Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.2.23.2.1.2 of [1]

8.1.82.2.1.3

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.2.2.2.1.1 of [1]

8.1.82.2.1.4 TFCS

TFCS size	8
TFCS	(16 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1)

8.1.82.2.2 Physical channel parameters

DPCH Downlink	Midamble	512 chips
	Codes and time slots	SF16 x 2 codes x 1 time slot
	Max. Number of data bits/radio frame	472 bits
	TFCI code word	16 bits
	Puncturing limit	0.48

8.1.83 Streaming / unknown / UL:8 DL:32 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release '99.

8.1.83.1 Uplink

8.1.83.1.1 Transport channel parameters

8.1.83.1.1.1 Transport channel parameters for Streaming / unknown / UL:8 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320
	Max data rate, bps	8000
	AMD PDU header, bit	16
	MAC header, bit	0
MAC	MAC multiplexing	N/A
	TrCH type	DCH
	TB sizes, bit	336
	TFS	0x336
	TF0, bits	1x336
	TF1, bits	
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	1068
Layer 1	Max number of bits/radio frame before rate matching	267
	RM attribute	135-175

8.1.83.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.2.23a.1.1.2 of [1]

8.1.83.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.2.2.1.1.1 of [1]

8.1.83.1.1.4

TFCS

TFCS size	8 (alt. 12)
TFCS	(8 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1) (alt (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF2, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF0, TF2, TF1),(TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF2, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF1, TF2, TF1))

8.1.83.1.2

Physical channel parameters

DPCH Uplink	Midamble	512 chips
	Codes and time slots	SF8 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	452 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.64

8.1.83.2

Downlink

8.1.83.2.1

Transport channel parameters

8.1.83.2.1.1

Transport channel parameters for Streaming / unknown / DL: 32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	640
	Max data rate, bps	32000
	AMD PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	656
	TFS	0x656
		1x656
		2x656
	TTI, ms	40
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	4044
	Max number of bits/radio frame before rate matching	1011
	RM attribute	125-165

8.1.83.2.1.2

Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.2.23.2.1.2 of [1]

8.1.83.2.1.3

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.2.2.2.1.1 of [1]

8.1.83.2.1.4 TFCS

TFCS size	12
TFCS	(32 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF0, TF1), (TF0, TF1, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF0, TF1), (TF1, TF1, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1)

8.1.83.2.2 Physical channel parameters

DPCH Downlink	Midamble	512 chips
	Codes and time slots	SF16 x 5 codes x 1 time slot
	Max. Number of data bits/radio frame	1204 bits
	TFCI code word	16 bits
	Puncturing limit	0.80

8.1.84 Streaming / unknown / UL:32 DL:256 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps.

This is supported in Release '99.

8.1.84.1 Uplink

8.1.84.1.1 Transport channel parameters

8.1.84.1.1.1 Transport channel parameters for Streaming / unknown / UL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB
RLC	Logical channel type	DTCH
	RLC mode	AM
	Payload sizes, bit	320
	Max data rate, bps	32000
	AMD PDU header, bit	16
MAC	MAC header, bit	0
	MAC multiplexing	N/A
Layer 1	TrCH type	DCH
	TB sizes, bit	336
	TFS	0x336
	TF0, bits	1x336
	TF1, bits	2x336
	TF2, bits	
	TTI, ms	20
	Coding type	TC
	CRC, bit	16
	Max number of bits/TTI after channel coding	2124
	Max number of bits/radio frame before rate matching	1062
	RM attribute	135-175

8.1.84.1.1.2 Transport channel parameters for Interactive or Background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23a.1.1.1 of [1]

8.1.84.1.1.3 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1]

8.1.84.1.1.4

TFCS

TFCS size	12 (alt 18)
TFCS	(32 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0, TF0, TF0), (TF1, TF0, TF0), (TF2, TF0, TF0), (TF0, TF1, TF0), (TF1, TF1, TF0), (TF2, TF1, TF0), (TF0, TF0, TF1), (TF1, TF0, TF1), (TF2, TF0, TF1), (TF0, TF1, TF1), (TF1, TF1, TF1), (TF2, TF1, TF1) (alt. ((TF0, TF0, TF0), (TF0, TF1, TF0), (TF0, TF2, TF0) (TF0, TF0, TF1), (TF0, TF1, TF1), (TF0, TF2, TF1), (TF1, TF0, TF0), (TF1, TF1, TF0), (TF1, TF2, TF0) (TF1, TF0, TF1), (TF1, TF1, TF1), (TF1, TF2, TF1), (TF2, TF0, TF0), (TF2, TF1, TF0), (TF2, TF2, TF0), (TF2, TF0, TF1), (TF2, TF1, TF1), (TF2, TF2, TF1))

8.1.84.1.2

Physical channel parameters

DPCCH Uplink	Midamble	512 chips
	Codes and time slots	SF4 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	904 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.60

8.1.84.2

Downlink

8.1.84.2.1

Transport channel parameters

8.1.84.2.1.1

Transport channel parameters for Streaming / unknown / DL:256 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	
RLC	Logical channel type	DTCH	
	RLC mode	AM	
	Payload sizes, bit	640	
	Max data rate, bps	256000	
	AMD PDU header, bit	16	
MAC	MAC header, bit	0	
	MAC multiplexing	N/A	
Layer 1	TrCH type	DCH	
	TB sizes, bit	656	
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	3x656
		TF4, bits	4x656
	TTI, ms	10	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8076	
	Max number of bits/radio frame before rate matching	8076	
	RM attribute	125-165	

8.1.84.2.1.2

Transport channel parameters for Interactive or Background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1. 23.2.1.2 of [1]

8.1.84.2.1.3

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1]

8.1.84.2.1.4

TFCS

TFCS size	20
TFCS	(256 kbps Streaming RAB, 8 kbps I/B RAB, DCCH)= (TF0,TF0,TF0), (TF1,TF0,TF0), (TF2,TF0,TF0), (TF3,TF0,TF0), (TF4,TF0,TF0), (TF0,TF1,TF0), (TF1,TF1,TF0), (TF2,TF1,TF0), (TF3,TF1,TF0), (TF4,TF1,TF0), (TF0,TF0,TF1), (TF1,TF0,TF1), (TF2,TF0,TF1), (TF3,TF0,TF1), (TF4,TF0,TF1), (TF0,TF1,TF1), (TF1,TF1,TF1), (TF2,TF1,TF1), (TF3,TF1,TF1), (TF4,TF1,TF1),

8.1.84.2.2

Physical channel parameters

DPCCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 5 codes x 4 time slots
	Max. Number of data bits/radio frame	5504 bits
	TFCI code word	16 bits
	Puncturing limit	0.64

8.1.85 Interactive or background / UL:16 DL:16 kbps / PS RAB +
Interactive or Background / UL:16 DL:16 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release '99.

8.1.85.1 Uplink

8.1.85.1.1 Transport channel parameters

8.1.85.1.1.1 Transport channel parameters for Interactive or Background / UL:16 + UL:16 kbps /
PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320 (alt 128)	320 (alt 128)
	Max data rate, bps	16000	16000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340 (alt 0x148)
		TF1, bits	1x340 (alt 1x148)
		TF2, bits	2x340 (alt 5x148)
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2148 (alt 2472)	
	Max number of bits/radio frame before rate matching	537 (alt 618)	
	RM attribute	135-175	

8.1.85.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1]

8.1.85.1.1.3 TFCS

TFCS size	6
TFCS	(16 kbps RAB + 16 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1)

8.1.85.1.2 Physical channel parameters

DPCH Uplink	Midamble	512 chips
	Codes and time slots	SF8 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	452 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.64 (alt. 0.60)

8.1.85.2 Downlink

8.1.85.2.1 Transport channel parameters

8.1.85.2.1.1 Transport channel parameters for Interactive or background / DL:16 + DL:16 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	16000	16000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	2148	
	Max number of bits/radio frame before rate matching	537	
	RM attribute	135-175	

8.1.85.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1]

8.1.85.2.1.3 TFCS

TFCS size	6
TFCS	(16 kbps RAB + 16 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1)

8.1.85.2.2 Physical channel parameters

DPCH Downlink	Midamble	512 chips
	Codes and time slots	SF16 x 2 codes x 1 time slot
	Max. Number of data bits/radio frame	472 bits
	TFCI code word	16 bits
	Puncturing limit	0.68

8.1.86 Interactive or background / UL:64 DL:8 kbps / PS RAB + Interactive or Background / UL:64 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM entities, DL: 32 kbps plus support for 5 AM entities.

This is supported in Release '99.

8.1.86.1 Uplink

See subclause 6.10.3.4.1.57.1 of [1]

8.1.86.2 Downlink

See subclause 6.10.3.4.1.56.2 of [1]

8.1.87 Interactive or Background / UL:64 DL:128 kbps / PS RAB + Interactive or Background / UL:64 DL:128 kbps / PS RAB+ UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM entities, DL: 128kbps.

This is supported in Release '99.

8.1.87.1 Uplink

See subclause 6.10.3.4.1.57.1 of [1].

8.1.87.2 Downlink

8.1.87.2.1 Transport channel parameters

8.1.87.2.1.1 Transport channel parameters for Interactive or background / DL:128 + DL:128 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	128000	128000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	4x340
		TF4, bits	8x340
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8556	
	Max number of bits/radio frame before rate matching	4278	
	RM attribute	120-160	

8.1.87.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.87.2.1.3 TFCS

TFCS size	10
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF3,TF0), (TF4,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF3,TF1), (TF4,TF1)

8.1.87.2.2 Physical channel parameters

DPCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 9 codes x 1 time slot
	Max. Number of data bits/radio frame	2468 bits
	TFCI code word	16 bits
	Puncturing limit	0.52

8.1.88 Interactive or Background / UL:64 DL:384 kbps / PS RAB + Interactive or Background / UL:64 DL:384 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps.

This is supported in Release '99.

8.1.88.1 Uplink

See subclause 6.10.3.4.1.57.1 of [1].

8.1.88.2 Downlink

8.1.88.2.1 Transport channel parameters

8.1.88.2.1.1 Transport channel parameters for Interactive or background / DL:384 + DL:384 kbps / PS RAB

Higher Layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	384000	384000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	4x340
		TF4, bits	8x340
		TF5, bits	12x340
	TTI, ms	10	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	12828	
	Max number of bits/radio frame before rate matching	12828	
	RM attribute	110-150	

8.1.88.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.88.2.1.3 TFCS

TFCS size	12
TFCS	(384 kbps RAB + 384 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF5, TF0) (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1), (TF5, TF1)

8.1.88.2.2 Physical channel parameters

DPCCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 9 codes x 3 time slots
	Max. Number of data bits/radio frame	7436 bits
	TFCI code word	16 bits
	Puncturing limit	0.56

8.1.89 Interactive or background / UL:128 DL:128 kbps / PS RAB + Interactive or Background / UL:128 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps, DL: 128kbps. The minimum UE class to support the alternative UL configuration (128-bit payload size) is UL: 128kbps plus support for "Maximum total number of transport blocks transmitted within TTIs that start at the same time" = 32.

This is supported in Release '99.

8.1.89.1 Uplink

8.1.89.1.1 Transport channel parameters

8.1.89.1.1.1 Transport channel parameters for Interactive or Background / UL:128 + UL:128 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320 (alt. 128)	320 (alt. 128)
	Max data rate, bps	128000	128000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340 (alt. 148)	
	TFS	TF0, bits	0x340 (alt. 0x148)
		TF1, bits	1x340 (alt. 1x148)
		TF2, bits	2x340 (alt. 7x148)
		TF3, bits	4x340 (alt. 14x148)
		TF4, bits	8x340 (alt. 20x148)
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8556 (alt. 9852)	
	Max number of bits/radio frame before rate matching	4278 (alt. 4926)	
	RM attribute	120-160	

8.1.89.1.1.2 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1].

8.1.89.1.1.3

TFCS

TFCS size	9 (alt. 10)
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1) (alt (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0), (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1))

8.1.89.1.2

Physical channel parameters

DPCH Uplink	Midamble	256 chips
	Codes and time slots	SF2 x 1 code x 1 time slot+ SF4 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	3168 bits
	TFCI code word	16 bits
	TPC	2 bits
	Puncturing Limit	0.68(alternatively 0.60)

8.1.89.2

Downlink

8.1.89.2.1

Transport channel parameters

8.1.89.2.1.1

Transport channel parameters for Interactive or background / DL:128 + DL:128 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	128000	128000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	4x340
		TF4, bits	8x340
	TTI, ms	20	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	8556	
	Max number of bits/radio frame before rate matching	4278	
	RM attribute	120-160	

8.1.89.2.1.2

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.89.2.1.3 TFCS

TFCS size	10
TFCS	(128 kbps RAB + 128 kbps RAB, DCCH)= (TF0,TF0), (TF1,TF0), (TF2,TF0), (TF3,TF0), (TF4,TF0), (TF0,TF1), (TF1,TF1), (TF2,TF1), (TF3,TF1), (TF4,TF1)

8.1.89.2.2 Physical channel parameters

DPCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 5 codes x 2 time slots
	Max. Number of data bits/radio frame	2744 bits
	TFCI code word	16 bits
	Puncturing limit	0.60

8.1.90 Interactive or background / UL:128 DL:32 kbps / PS RAB +
Interactive or Background / UL:128 DL:32 kbps / PS RAB + UL:3.4
DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128kbps, DL: 32kbps. The minimum UE class to support the alternative UL configuration (128-bit payload size) is UL: 128kbps plus support for "Maximum total number of transport blocks transmitted within TTIs that start at the same time" = 32.

This is supported in Release '99.

8.1.90.1 Uplink

See subclause 8.1.89.1 of [1].

8.1.90.2 Downlink

8.1.90.2.1 Transport channel parameters

8.1.90.2.1.1 Transport channel parameters for Interactive or background / DL:32 + DL:32 kbps / PS RAB

Higher layer	RAB/Signalling RB	RAB	RAB
RLC	Logical channel type	DTCH	DTCH
	RLC mode	AM	AM
	Payload sizes, bit	320	320
	Max data rate, bps	32000	32000
	AMD PDU header, bit	16	16
MAC	MAC header, bit	4	4
	MAC multiplexing	2 logical channel multiplexing	
Layer 1	TrCH type	DCH	
	TB sizes, bit	340	
	TFS	TF0, bits	0x340
		TF1, bits	1x340
		TF2, bits	2x340
		TF3, bits	3x340
		TF4, bits	4x340
	TTI, ms	40	
	Coding type	TC	
	CRC, bit	16	
	Max number of bits/TTI after channel coding	4284	
	Max number of bits/radio frame before rate matching	1071	
	RM attribute	135-175	

8.1.90.2.1.2 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.90.2.1.3 TFCS

TFCS size	10
TFCS	(32 kbps RAB + 32 kbps RAB, DCCH)= (TF0, TF0), (TF1, TF0), (TF2, TF0), (TF3, TF0), (TF4, TF0) (TF0, TF1), (TF1, TF1), (TF2, TF1), (TF3, TF1), (TF4, TF1)

8.1.90.2.2 Physical channel parameters

DPCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 3 codes x 1 time slot
	Max. Number of data bits/radio frame	812 bits
	TFCI code word	16 bits
	Puncturing limit	0.64

8.1.91 Streaming / unknown / UL:16 DL:16 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM entities, DL: 64 kbps.

This is supported in Release "99".

8.1.91.1 Uplink

See subclause 6.10.3.4.1.58.1 of [1].

8.1.91.2 Downlink

See subclause 8.1.82.2 of [1].

8.1.92 Streaming / unknown / UL:16 DL:32 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 5 AM entities, DL: 64 kbps.

This is supported in Release "99".

8.1.92.1 Uplink

See subclause 6.10.3.4.1.58.1 of [1].

8.1.92.2 Downlink

See subclause 8.1.83.2 of [1].

8.1.93 Interactive or background / UL:16 DL:32 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps. The minimum UE class to support the alternative UL configuration is UL: 32kbps plus support for 8 TB/TTI.

This is supported in Release "99".

8.1.93.1 Uplink

See subclause 6.10.3.4.1.23b.1 of [1].

8.1.93.2 Downlink

See subclause 6.10.3.4.1.23c.2 of [1].

8.1.94 Interactive or background / UL:16 DL:64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 64 kbps. The minimum UE class to support the alternative UL configuration is UL: 32kbps plus support for 8 TB/TTI.

This is supported in Release "99".

8.1.94.1 Uplink

See subclause 6.10.3.4.1.23b.1 of [1].

8.1.94.2 Downlink

See subclause 6.10.3.4.1.25.2 of [1].

8.1.95 Interactive or background / UL:16 DL:128 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps, DL: 128 kbps. The minimum UE class to support the alternative UL configuration is UL: 32kbps plus support for 8 TB/TTI.

This is supported in Release "99.

8.1.95.1 Uplink

See subclause 6.10.3.4.1.23b.1 of [1].

8.1.95.2 Downlink

See subclause 6.10.3.4.1.27.2 of [1].

8.1.96 Conversational / speech / UL:12.2 DL:12.2 kbps + Streaming / unknown / UL:16 DL:128 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

The minimum UE classes supporting this combination are UL: 64 kbps plus support for 16 TB/TTI, DL: 128 kbps.

This is supported in release "99.

8.1.96.1 Uplink

8.1.96.1.1 Transport channel parameters

8.1.96.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.3.4.1.4.1.1.1 of [1].

8.1.96.1.1.2 Transport channel parameters for Streaming / unknown / UL:16 kbps

See subclause 6.10.3.4.1.58.1.1.1 of [1].

8.1.96.1.1.3 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23a.1.1.1 of [1].

8.1.96.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1].

8.1.96.1.1.5

TFCS

TFCS size	24 (alt. 36)
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 16 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1) (alt (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF0), (TF1,TF0,TF0,TF0,TF2,TF0), (TF2,TF1,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF1,TF2,TF0), (TF1,TF0,TF0,TF1,TF2,TF0), (TF2,TF1,TF1,TF1,TF2,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1), (TF1,TF0,TF0,TF0,TF2,TF1), (TF2,TF1,TF1,TF0,TF2,TF1), (TF0,TF0,TF0,TF1,TF2,TF1), (TF1,TF0,TF0,TF1,TF2,TF1), (TF2,TF1,TF1,TF1,TF2,TF1))

8.1.96.1.2

Physical channel parameters

DPCH Uplink	Midamble	256 chips
	Codes and time slots	SF4 x 1 code x 1 time slot + SF16 x 1 code x 1 time slot
	Max. Number of data bits/radio frame	1308 bits (alt. 1244 bits)
	TFCI code word	16 bits (alt. 32 bits)
	TPC	2 bits
	Puncturing Limit	0.88 (alt. 0.84))

8.1.96.2

Downlink

8.1.96.2.1

Transport channel parameters

8.1.96.2.1.1

Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.3.4.1.4.2.1.1 of [1]

8.1.96.2.1.2

Transport channel parameters for Streaming / unknown / DL:128 kbps / PS RAB

See subclause 8.1.75.2.1.1 of [1].

8.1.96.2.1.3

Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23.2.1.1 of [1].

8.1.96.2.1.4

Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.96.2.1.5

TFCS

TFCS size	48
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 128 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF2,TF1,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF1,TF3,TF1,TF1)

8.1.96.2.2

Physical channel parameters

DPCCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 6 codes x 2 time slots
	Max. Number of data bits/radio frame	3280 bits
	TFCI code word	32 bits
	Puncturing limit	0,64

8.1.97 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB +
Streaming / unknown / UL:128 DL:16 kbps / PS RAB + Interactive
or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps
SRBs for DCCH

The minimum UE classes supporting this combination are UL: 128 kbps plus support for 16 TB/TTI, DL: 64 kbps.

This is supported in release '99.

8.1.97.1 Uplink

8.1.97.1.1 Transport channel parameters

8.1.97.1.1.1 Transport channel parameters for Conversational / speech / UL:12.2 kbps / CS RAB

See subclause 6.10.3.4.1.4.1.1.1 of [1]

8.1.97.1.1.2 Transport channel parameters for Streaming / unknown / UL:128 kbps / PS RAB

Higher Layer	RAB/Signalling RB		RAB
RLC	Logical channel type		DTCH
	RLC mode		AM
	Payload sizes, bit		640
	Max data rate, bps		128000
	AM PDU header, bit		16
MAC	MAC header, bit		0
	MAC multiplexing		N/A
Layer 1	TrCH type		DCH
	TB sizes, bit		656
	TFS	TF0, bits	0x656
		TF1, bits	1x656
		TF2, bits	2x656
		TF3, bits	4x656
	TTI, ms		20
	Coding type		TC
	CRC, bit		16
	Max number of bits/TTI after channel coding		8076
	Max number of bits/radio frame before rate matching		4038
	RM attribute		125-165

8.1.97.1.1.3 Transport channel parameters for Interactive or background / UL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23a.1.1.1 of [1].

8.1.97.1.1.4 Transport channel parameters for UL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.1.1.1 of [1].

8.1.97.1.1.5

TFCS

TFCS size	48 (alt. 72)
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 128 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF2,TF1,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF1,TF3,TF1,TF1) (alt. (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF2,TF0,TF0), (TF0,TF0,TF0,TF3,TF0,TF0), (TF1,TF0,TF0,TF3,TF0,TF0), (TF2,TF1,TF1,TF3,TF0,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF2,TF1,TF0), (TF1,TF0,TF0,TF2,TF1,TF0), (TF2,TF1,TF1,TF2,TF1,TF0), (TF0,TF0,TF0,TF3,TF1,TF0), (TF1,TF0,TF0,TF3,TF1,TF0), (TF2,TF1,TF1,TF3,TF1,TF0), (TF0,TF0,TF0,TF2,TF0,TF0), (TF1,TF0,TF0,TF2,TF0,TF0), (TF2,TF1,TF1,TF0,TF2,TF0), (TF0,TF0,TF0,TF1,TF2,TF0), (TF1,TF0,TF0,TF1,TF2,TF0), (TF2,TF1,TF1,TF1,TF2,TF0), (TF0,TF0,TF0,TF2,TF2,TF0), (TF1,TF0,TF0,TF2,TF2,TF0), (TF2,TF1,TF1,TF2,TF2,TF0), (TF0,TF0,TF0,TF3,TF2,TF0), (TF1,TF0,TF0,TF3,TF2,TF0), (TF2,TF1,TF1,TF3,TF2,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF2,TF0,TF1), (TF1,TF0,TF0,TF2,TF0,TF1), (TF2,TF1,TF1,TF2,TF0,TF1), (TF0,TF0,TF0,TF3,TF0,TF1), (TF1,TF0,TF0,TF3,TF0,TF1), (TF2,TF1,TF1,TF3,TF0,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1), (TF0,TF0,TF0,TF2,TF1,TF1), (TF1,TF0,TF0,TF2,TF1,TF1), (TF2,TF1,TF1,TF2,TF1,TF1), (TF0,TF0,TF0,TF3,TF1,TF1), (TF1,TF0,TF0,TF3,TF1,TF1), (TF2,TF1,TF1,TF3,TF1,TF1), (TF0,TF0,TF0,TF2,TF2,TF1), (TF1,TF0,TF0,TF2,TF2,TF1), (TF2,TF1,TF1,TF2,TF2,TF1), (TF0,TF0,TF0,TF3,TF2,TF1), (TF1,TF0,TF0,TF3,TF2,TF1), (TF2,TF1,TF1,TF3,TF2,TF1)

8.1.97.1.2 Physical channel parameters

DPCH Uplink	Midamble	256 chips
	Codes and time slots	{SF2 x 1 code x 1 timeslot} + {SF4 x 1 code x 1 timeslot}
	Max. Number of data bits/radio frame	3040 bits
	TFCI code word	32 bits
	TPC	2
	Puncturing limit	0.60

8.1.97.2

Downlink

8.1.97.2.1 Transport channel parameters

8.1.97.2.1.1 Transport channel parameters for Conversational / speech / DL:12.2 kbps / CS RAB

See subclause 6.10.3.4.1.4.2.1.1 of [1].

8.1.97.2.1.2 Transport channel parameters for Streaming / unknown / DL:16 kbps / PS RAB

See subclause 8.1.82.2.1.1 of [1].

8.1.97.2.1.3 Transport channel parameters for Interactive or background / DL:8 kbps / PS RAB

See subclause 6.10.3.4.1.23.2.1.1 of [1].

8.1.97.2.1.4 Transport channel parameters for DL:3.4 kbps SRBs for DCCH

See subclause 6.10.3.4.1.2.2.1.1 of [1].

8.1.97.2.1.5 TFCS

TFCS size	24
TFCS	(RAB subflow#1, RAB subflow#2, RAB subflow#3, 16 kbps RAB, 8 kbps RAB, DCCH)= (TF0,TF0,TF0,TF0,TF0,TF0), (TF1,TF0,TF0,TF0,TF0,TF0), (TF2,TF1,TF1,TF0,TF0,TF0), (TF0,TF0,TF0,TF1,TF0,TF0), (TF1,TF0,TF0,TF1,TF0,TF0), (TF2,TF1,TF1,TF1,TF0,TF0), (TF0,TF0,TF0,TF0,TF1,TF0), (TF1,TF0,TF0,TF0,TF1,TF0), (TF2,TF1,TF1,TF0,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF1,TF1,TF0), (TF1,TF0,TF0,TF1,TF1,TF0), (TF2,TF1,TF1,TF1,TF1,TF0), (TF0,TF0,TF0,TF0,TF0,TF1), (TF1,TF0,TF0,TF0,TF0,TF1), (TF2,TF1,TF1,TF0,TF0,TF1), (TF0,TF0,TF0,TF1,TF0,TF1), (TF1,TF0,TF0,TF1,TF0,TF1), (TF2,TF1,TF1,TF1,TF0,TF1), (TF0,TF0,TF0,TF0,TF1,TF1), (TF1,TF0,TF0,TF0,TF1,TF1), (TF2,TF1,TF1,TF0,TF1,TF1), (TF0,TF0,TF0,TF1,TF1,TF1), (TF1,TF0,TF0,TF1,TF1,TF1), (TF2,TF1,TF1,TF1,TF1,TF1)

8.1.97.2.2 Physical channel parameters

DPCH Downlink	Midamble	256 chips
	Codes and time slots	SF16 x 3 codes x 1 time slot
	Max. Number of data bits/radio frame	812 bits
	TFCI code word	16 bits
	Puncturing limit	0.52

8.2 Combinations on PDSCH, SCCH, PUSCH and PRACH

8.2.1 Interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.10.3.4.2.1 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps , DL: 384kbps.

This is supported in Release '99.

8.2.2 Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.10.3.4.2.2 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 384kbps. The minimum UE class to support the alternative DL configuration is DL: 768kbps.

This is supported in Release '99.

8.2.3 Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 DL:33.6 kbps SRBs for DCCH, CCCH and BCCH + UL:16.8 DL:16 kbps SRBs for SHCCH

See subclause 6.10.3.4.2.3 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 2048kbps. The minimum UE class to support the alternative DL configuration is DL: 2048kbps plus support maximum TB bits 81920, and TB TC bits 81920.

This is supported in Release '99.

8.2.4 Interactive or background / UL: 384 kbps / PS RAB + UL: 16.8 DL: 33.6 kbps SRBs for DCCH, CCCH and BCCH + UL: 16.8 DL: 16 kbps SRBs for SHCCH

See subclause 6.10.3.4.2.4 of [1].

The minimum UE classes supporting this combination are UL: 384kbps plus support of SF1, DL: 2048kbps. The minimum UE class to support the alternative DL configuration is DL: 2048kbps plus support maximum TB bits 81920, and TB TC bits 81920. The minimum UE class to support the alternative UL configuration is UL: 384kbps plus support for 64 TB/TTI and support of SF1.

This is supported in Release '99.

8.3 Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH

8.3.1 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + interactive or background / UL:64 DL:256 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.10.3.4.3.1 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 384kbps. The minimum UE class to support the alternative DL configuration is DL: 768kps.

NOTE: It is assumed that the DPCH DL, PDSCH and SCCPCH use different TS.

This is supported in Release '99.

8.3.2 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:384 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.10.3.4.3.2 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 384kbps. The minimum UE class to support the alternative DL configuration is DL: 768kps.

NOTE: It is assumed that the DPCH DL, PDSCH and SCCPCH use different TS.

This is supported in Release '99.

- 8.3.3 Conversational / speech / UL:12.2 DL:12.2 kbps / CS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH + Interactive or background / UL:64 DL:2048 kbps / PS RAB + UL:16.8 kbps SRBs for CCCH and SHCCH + DL:33.6 kbps SRBs for CCCH, SHCCH and BCCH**

See subclause 6.10.3.4.3.3 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 2048kbps plus support for maximum TB bits 81920, maximum TC TB bits 81920.

This is supported in Release '99.

8.4 Combinations on SCCPCH

8.4.1 Stand – alone signalling RB for PCCH

See subclause 6.10.3.4.4.1 of [1].

The minimum UE class supporting this combination is DL: 32 kbps. This is supported in Release '99

8.4.2 Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.3.4.4.2 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

8.4.3 Interactive / Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.3.4.4.3 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

8.4.4 Interactive/Background 32 kbps PS RAB + Interactive/Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.3.4.4.2a of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

8.4.5 SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.3.4.4.2b of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

8.4.6 SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.10.3.4.4.3a of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

8.4.7 RB for CTCH + SRB for CCCH + SRB for BCCH

See subclause 6.10.3.4.4.4 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release '99.

8.5 Combinations on PRACH

8.5.1 SRB for CCCH + SRB for DCCH

See subclause 6.10.3.4.5.1 of [1].

The minimum UE class supporting this combination is UL: 32 kbps. This is supported by Release '99.

8.5.2 Interactive/Background 12.8 kbps PS RAB + SRB for CCCH + SRB for DCCH

See subclause 6.10.3.4.5.2 of [1].

The minimum UE class supporting this combination is UL: 32 kbps. This is supported by Release '99.

8.5.3 Interactive/Background 12.8 kbps PS RAB + SRB for CCCH + SRB for DCCH

See subclause 6.10.3.4.5.3 of [1].

The minimum UE class supporting this combination is UL: 32 kbps. This is supported by Release '99.

9 Examples of Radio Bearers and Signalling Radio Bearers for 1.28 Mcps TDD

9.1 Combinations on DPCH

9.1.1 Stand-alone UL:1.7 DL:1.7 kbps SRBs for DCCH

See subclause 6.11.5.4.1.1 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.1a Stand-alone UL: 1.7 DL: 1.7 kbps SRBs for DCCH (multiframe)

See subclause 6.11.5.4.11a of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.2 Stand-alone UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.2 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.3 Stand-aloneUL: 13.6 DL: 13.6 kbps SRBs for DCCH

See subclause 6.11.5.4.1.3 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.4 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.4 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.4a Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2 kbps, 7.95, 5.9, 4.75) / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.4a of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.5 Conversational / speech / UL: 10.2 DL: 10.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.5 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.5a Conversational / speech / UL: (10.2, 6.7, 5.9, 4.75) DL: (10.2, 6.7, 5.9, 4.75) kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.5a of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.6 Conversational / speech / UL: 7.95 DL: 7.95 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.6 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.7 Conversational / speech / UL: 7.4 DL: 7.4 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.7 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.7a Conversational / speech / UL: (7.4, 6.7, 5.9, 4.75) DL: (7.4, 6.7, 5.9, 4.75) kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.7a of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.8 Conversational / speech / UL: 6.7 DL: 6.7 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.8 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.9 Conversational / speech / UL: 5.9 DL: 5.9 kbps / CS rab + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.9 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.10 Conversational / speech / UL: 5.15 DL: 5.15 kbps / CS RAB + UL: 1.7 DL: 1.7 kbps SRBs for DCCH

See subclause 6.11.5.4.1.10 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.11 Conversational / speech / UL: 4.75 DL: 4.75 kbps / CS RAB + UL: 1.7 DL: 1.7 kbps SRBs for DCCH

See subclause 6.11.5.4.1.11 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.12 Conversational / unknown / UL: 28.8 DL: 28.8 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.12 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.13 Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.13 of [1].

The minimum UE classes supporting this combination are UL: 64kbps, DL: 64kbps.

This is supported in Release 4.

9.1.14 Conversational / unknown / UL: 32 DL: 32 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.14 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.15 Streaming / unknown / UL: 14.4 DL: 14.4 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.15 of [1].

The minimum UE classes supporting this combination are UL: 32kbps, DL: 32kbps.

This is supported in Release 4.

9.1.16 Streaming / unknown / UL: 28.8 DL: 28.8 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.16 of [1].

The minimum UE classes supporting this combination are UL: 32kbps; DL: 32kbps.

This is supported in Release 4.

9.1.17 Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.17 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 32kbps.

This is supported in Release 4.

9.1.18 Void

Void

9.1.19 Void

Void

9.1.20 Void

Void.

9.1.21 Void

Void.

9.1.22 Void

Void.

9.1.23 Interactive or background / UL: 32 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.23 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps; DL: 32kbps.

This is supported in Release 4.

9.1.23a Interactive or background / UL: 8DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.23a of [1].

The minimum UE classes supporting this combination are UL: 32 kbps; DL: 32kbps.

This is supported in Release 4.

9.1.23b Interactive or background / UL: 16 DL: 16 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.23b of [1].

The minimum UE classes supporting this combination are UL: 32 kbps; DL: 32kbps.

This is supported in Release 4.

9.1.23c Interactive or background / UL: 32 DL: 32 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.23c of [1].

The minimum UE classes supporting this combination are UL: 32 kbps; DL: 32kbps.

This is supported in Release 4.

9.1.23d Interactive or background / UL: 32 DL: 32 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH (20 ms TTI)

See subclause 6.11.5.4.1.23d of [1].

The minimum UE classes supporting this combination are UL: 32 kbps; DL: 32kbps.

This is supported in Release 4.

9.1.24 Void

Void.

9.1.25 Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.25 of [1].

The minimum UE classes supporting this combination are UL: 32 kbps; DL: 64 kbps.

This is supported in Release 4.

9.1.26 Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.26 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 64 kbps.

This is supported in Release 4.

9.1.27 Interactive or background / UL: 64 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.27 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 128kbps.

This is supported in Release 4.

9.1.28 Interactive or background / UL: 128 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.28 of [1].

The minimum UE classes supporting this combination are UL: 128kbps; DL: 128kbps.

This is supported in Release 4.

9.1.29 Interactive or background / UL: 64 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.29 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 128kbps.

This is supported in Release 4.

9.1.30 Interactive or background / UL: 144 DL: 144 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.30 of [1].

The minimum UE classes supporting this combination are UL: 128 kbps; DL: 128kbps.

This is supported in Release 4.

9.1.31 Interactive or background / UL: 64 DL: 256 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.31 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 384 kbps.

This is supported in Release 4.

9.1.32 Interactive or background / UL: 64 DL: 384 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.32 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 384 kbps.

This is supported in Release 4.

9.1.33 Interactive or background / UL: 128 DL: 384 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.33 of [1].

The minimum UE classes supporting this combination are UL: 128 kbps; DL: 384 kbps.

This is supported in Release 4.

9.1.34 Interactive or background / UL: 384 DL: 384 kbps / PS RAB +UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.34 of [1].

The minimum UE classes supporting this combination are UL: 384 kbps; DL: 384kbps.

This is supported in Release 4.

9.1.35 Interactive or background / UL: 64 DL: 2048 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.35 of [1].

The minimum UE classes supporting this combination are UL: 64kbps; DL: 2048kbps.

This is supported in Release 4.

9.1.36 Void

Void.

9.1.37 Void

Void.

9.1.38 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 32 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.38 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32kbps.

This is supported in Release 4.

9.1.38a Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 0 DL: 0 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.38a of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32kbps

This is supported in Release 4.

9.1.38b Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.38b of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps

This is supported in Release 4.

9.1.38c Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 32 DL: 32 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.38c of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps

This is supported in Release 4.

9.1.38d Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.38d of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps

This is supported in Release 4.

- 9.1.38e Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 0 DL: 0 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.38e of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps

This is supported in Release 4.

- 9.1.38f Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.38f of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps

This is supported in Release 4.

- 9.1.38g Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 16 DL: 16 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.38g of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps

This is supported in Release 4.

- 9.1.38h Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 32 DL: 32 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.38h of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 32 kbps

This is supported in Release 4.

- 9.1.38i Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.38i of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps

This is supported in Release 4.

- 9.1.38j Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Interactive or background / UL: 64 DL: 128 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.38j of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 128 kbps

This is supported in Release 4.

- 9.1.39 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB +
Interactive or background / UL: 32 DL: 64 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.39 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps.

This is supported in Release 4.

- 9.1.40 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB +
Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.40 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps.

This is supported in Release 4.

- 9.1.41 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB +
Interactive or background / UL: 64 DL: 128 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.41 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 128 kbps.

This is supported in Release 4.

- 9.1.42 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB +
Interactive or background / UL: 64 DL: 256 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.42 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 384 kbps..

This is supported in Release 4.

- 9.1.43 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB +
Interactive or background / UL: 64 DL: 384 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.43 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 384 kbps.

This is supported in Release 4.

- 9.1.44 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Interactive or background / UL: 128 DL: 2048 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.44 of [1].

The minimum UE classes supporting this combination are UL: 384 kbps; DL: 2048 kbps.

This is supported in Release 4.

- 9.1.45 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Streaming / unknown / UL: 57.6 DL: 57.6 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.45 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps.

This is supported in Release 4.

9.1.46 Void

Void.

9.1.47 Void

Void.

9.1.48 Void

Void.

- 9.1.49 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.49 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 64 kbps.

This is supported in Release 4.

- 9.1.49a Conversational / speech / UL: (12.2, 7.95, 5.9, 4.75) DL: (12.2, 7.95, 5.9, 4.75) kbps / CS RAB + Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.49 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps ; DL: 64 kbps.

This is supported in Release 4.

- 9.1.50 Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB +
Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.50 of [1].

The minimum UE classes supporting this combination are UL: 64 kbps; DL: 128 kbps.

This is supported in Release 4.

- 9.1.51 Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB +
Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.51 of [1].

The minimum UE classes for this combinations are UL: 64 kbps; DL: 128 kbps.

This is supported in Release 4.

- 9.1.51a Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB +
Interactive or background / UL: 8 DL: 8 kbps / PS RAB + UL: 3.4 DL:
3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.51a of [1].

The minimum UE classes for this combinations are UL: 64 kbps ; DL: 64 kbps.

This is supported in Release 4.

- 9.1.51b Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB +
Interactive or background / UL: 16 DL: 64 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.51b of [1].

The minimum UE classes for this combinations are UL: 64 kbps ; DL: 128 kbps.

This is supported in Release 4.

- 9.1.52 Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB +
Interactive or background / UL: 64 DL: 128 kbps / PS RAB + UL: 3.4
DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.52 of [1].

The minimum UE classes for this combination are UL: 64 kbps; DL: 384 kbps.

This is supported in Release 4.

- 9.1.53 Conversational / unknown / UL: 64 DL: 64 kbps / CS RAB +
Interactive or background / UL: 128 DL: 128 kbps / PS RAB + UL:
3.4 DL: 3.4 kbps SRBs for DCCH**

See subclause 6.11.5.4.1.53 of [1].

The minimum UE classes for this combination are UL: 384 kbps; DL: 384 kbps.

This is supported in Release 4.

9.1.54 Void

Void.

9.1.55 Void

Void.

9.1.56 Interactive or background / UL: 8 DL: 8 kbps / PS RAB + Interactive or background / UL: 8 DL: 8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.56 of [1].

The minimum UE classes for this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release 4.

9.1.57 Interactive or background / UL: 64 DL: 64 kbps / PS RAB + Interactive or background / UL: 64 DL: 64 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.57 of [1].

The minimum UE classes for this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release 4.

9.1.58 Streaming / Unknown / UL: 16 DL: 64 kbps / PS RAB + Interactive or background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.58 of [1].

The minimum UE classes for this combination are UL: 64 kbps, DL: 64 kbps.

This is supported in Release 4.

9.1.59 Reserved for future use

9.1.60 Reserved for future use

9.1.61 Conversational / unknown / UL:8 DL:8 kbps / PS RAB + Interactive or Background / UL:8 DL:8 kbps / PS RAB + UL:3.4 DL:3.4 kbps SRBs for DCCH

See subclause 6.11.5.4.1.561 of [1].

The minimum UE classes for this combination are UL: 32 kbps, DL: 32 kbps.

This is supported in Release 4.

9.2 Combinations on PDSCH, SCCH, PUSCH and PRACH

- 9.2.1 Interactive or background / UL: 64 DL: 256 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + UL: 16.8 DL: 33.6 kbps SRBs for DCCH, CCCH and BCCH + UL: 16.8 DL: 16 kbps SRBs for SHCCH

See subclause 6.11.5.4.2.1 of [1].

The minimum UE classes supporting this combination are UL: 128kbs; DL: 384kbs.

This is supported in Release 4.

- 9.2.2 Interactive or background / UL: 64 DL: 384 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + UL: 16.8 DL: 33.6 kbps SRBs for DCCH, CCCH and BCCH + UL: 16.8 DL: 16 kbps SRBs for SHCCH

See subclause 6.11.5.4.2.2 of [1].

The minimum UE classes supporting this combination are UL: 128kbs, DL: 384kbs.

This is supported in Release 4.

- 9.2.3 Interactive or background / UL: 64 DL: 2048 kbps / PS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + UL: 16.8 DL: 33.6 kbps SRBs for DCCH, CCCH and BCCH + UL: 16.8 DL: 16 kbps SRBs for SHCCH

See subclause 6.11.5.4.2.3 of [1].

The minimum UE classes supporting this combination are UL: 128kbs, DL: 2Mbps.

This is supported in Release 4.

9.3 Combinations on PDSCH, SCCPCH, DPCH, PUSCH and PRACH

- 9.3.1 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + interactive or background / UL: 64 DL: 256 kbps / PS RAB + UL: 16.8 kbps SRBs for CCCH and SHCCH + DL: 33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.11.5.4.3.1 of [1].

The minimum UE classes supporting this combination are UL: 128kbps; DL: 384kbps.

This is supported in Release 4.

- 9.3.2 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + Interactive or background / UL: 64 DL: 384 kbps / PS RAB + UL: 16.8 kbps SRBs for CCCH and SHCCH + DL: 33.6 kbps SRBs for CCCH, SHCCH and BCCH

See subclause 6.11.5.4.3.2 of [1].

The minimum UE classes supporting this combination are UL: 128kbps; DL: 384kbps.

This is supported in Release 4.

- 9.3.3 Conversational / speech / UL: 12.2 DL: 12.2 kbps / CS RAB + UL: 3.4 DL: 3.4 kbps SRBs for DCCH + Interactive or background / UL: 64 DL: 2048 kbps / PS RAB + UL: 16.8 kbps SRBs for CCCH and SHCCH + DL: 33.6 kbps SRBs for CCCH, SHCCH and BCCH**

See subclause 6.11.5.4.3.3 of [1].

The minimum UE classes supporting this combination are UL: 128kbps; DL: 2048kbps.

This is supported in Release 4.

9.4 Combinations on SCCPCH

9.4.1 Stand – alone signalling RB for PCCH

See subclause 6.11.5.4.4.1 of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release 4.

- 9.4.2 Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH**

See subclause 6.11.5.4.4.2 of [1].

The minimum UE class supporting this combination is DL: 64 kbps.

This is supported in Release 4.

- 9.4.2a Interactive / Background 32 kbps PS RAB + Interactive / Background 32 kbps PS RAB + SRBs for CCCH + SRB for DCCH + SRB for BCCH**

See subclause 6.11.5.4.4.2a of [1].

The minimum UE class supporting this combination is DL: 64 kbps.

This is supported in Release 4.

9.4.2b SRBs for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.11.5.4.4.2b of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release 4.

- 9.4.3 Interactive / Background 32 kbps RAB + SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH**

See subclause 6.11.5.4.4.3 of [1].

The minimum UE class supporting this combination is DL: 64 kbps..

This is supported in Release 4.

9.4.3a SRB for PCCH + SRB for CCCH + SRB for DCCH + SRB for BCCH

See subclause 6.11.5.4.4.3a of [1].

The minimum UE class supporting this combination is DL: 32 kbps.

This is supported in Release 4.

9.4.4 RB for CTCH + SRB for CCCH + SRB for BCCH

See subclause 6.11.5.4.4.4 of [1].

The minimum UE class supporting this combination is DL: 64 kbps..

This is supported in Release 4.

9.5 Combinations on PRACH

9.5.1 SRB for CCCH + SRB for DCCH

See subclause 6.11.5.4.5.1 of [1].

The minimum UE class supporting this combination is UL: 32 kbps.

This is supported in Release 4.

9.5.2 Interactive/Background 12.8 kbps PS RAB + SRB for CCCH + SRBs for DCCH

See subclause 6.11.5.4.5.2 of [1].

The minimum UE class supporting this combination is UL: 32 kbps..

This is supported in Release 4.

9.5.3 Interactive/Background 12.8 kbps PS RAB + Interactive/Background 12.8 kbps PS RAB + SRB for CCCH + SRBs for DCCH

See subclause 6.11.5.4.5.3 of [1].

The minimum UE class supporting this combination is UL: 32 kbps.

This is supported in Release 4.

Annex A: Service scenarios

This chapter presents a selection of service scenarios, which are used as a basis for the RAB scenarios. Only the basic scenarios having impact on the lower layers are considered. Because the real time applications have the tightest connection with the lower layers, the real time scenarios are studied more in detail in this document. Other scenarios can be derived as combinations of these basic scenarios.

Even though these scenarios are for IMS, they are applicable also for non-IMS PS scenarios. The differences between IMS and non-IMS are small in RAN level: Usually, the difference is that in non-IMS cases the IMS signalling stream is left out or replaced by non-IMS signalling stream. Other differences are indicated later in the text, whenever necessary.

Table A-1: Service scenarios

		IMS Signalling	Speech (RTP)	Speech (RTCP)	Audio (RTP)	Audio (RTCP)	Video (RTP)	Video (RTCP)	Text (RTP)	Data	Notes
1	Speech	X	X	X	-	-	-	-	-	O	
2	Audio	X	-	-	X	X	-	-	-	O	
3	Video	X	-	-	-	-	X	X	-	O	
4	Text	X	-	-	-	-	-	-	X	X	O
5	Speech, Video	X	X	X	-	-	X	X	-	-	O
6	Audio, Video	X	-	-	-	-	X	X	X	X	O
7	Speech, Text	X	-	-	X	X	X	X	-	-	O
8	Video, Text	X	X	X	-	-	-	-	X	X	O
9	Speech, Video, Text	X	X	X	-	-	X	X	X	X	O
10	Audio, Text	X	-	-	X	X	-	-	X	X	O
11	Audio, Video, Text	X	-	-	X	X	X	X	X	X	O

X = stream included in scenario

- = stream not included in scenario

O = stream optionally included in scenario

NOTE: In some 3GPP specifications (e.g., [10]) "audio" and "speech" are not separated, but handled under title "audio".

In most of the scenarios, the services can be either streaming or conversational. For PS streaming, there is no full IMS support in Release 5. However, this does not have major impact on the items presented in this document.

The protocol layers of the scenarios are presented in Figure A-1 for conversational and in Figure A-2 for streaming services ([10], [11]).

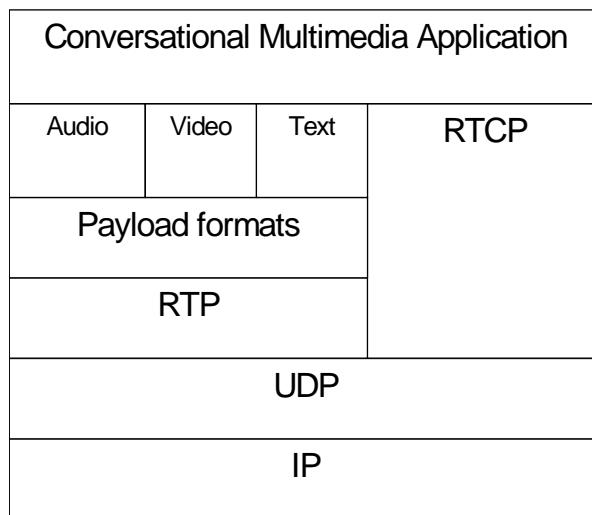


Figure A-1 – User plane protocol stack for conversational multimedia terminal

The protocol layers for IMS signalling stream, not presented in the figure, are (SDP/)SIP/UDP/IP.

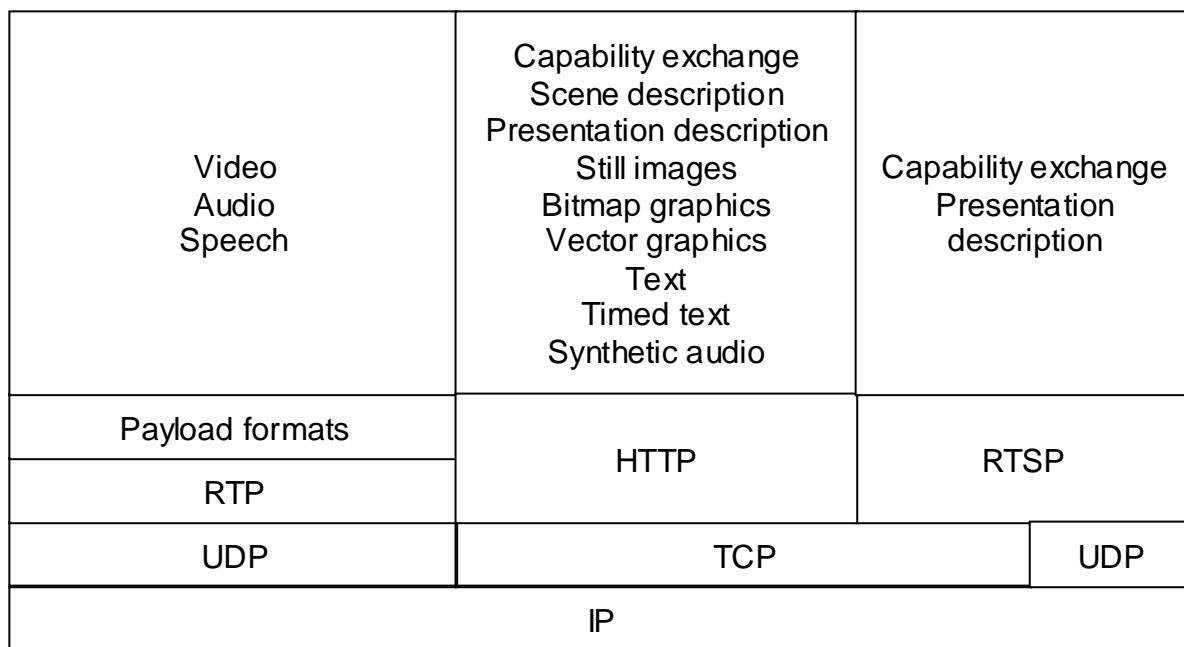


Figure A-2: Protocol stack for PS streaming terminal

A.1 Common characteristics of scenarios

The characteristics of the streams in the next sub-chapters are common to all or most of the scenarios.

In scenarios, where the IP protocol header size or contents are relevant, it is assumed that IPv6 header without extension headers is used, i.e., the IP header size is 40 bytes. The UDP header size is 8 bytes.

A.1.1 RTP and RTCP streams

A.1.2 Signalling stream

A.1.3 Data stream

The data stream may be used to carry any background or interactive data. Examples on data are still images, graphics, and scene / presentation descriptions, shown in Figure A-2 and [11], as well as web browsing and/or file download. Low delay is not guaranteed, and the data rates may vary between 0 kbps and the maximum bit rate of the context.

A.2 Scenarios

In each of the scenarios, there is also an additional PDP context for SIP or RTSP, and optionally one or more PDP contexts for data. Which PDP contexts are primary or secondary, is not relevant for RAB scenarios.

A.2.1 Speech

For the IMS speech service, the parameters that the transmitter should use (and the receiver shall at least support) are defined more precisely than for any other service in [10].

NOTE: Speech is defined under the term "audio" in [10].

Both AMR and AMR-WB are included. The parameters for speech are presented below, derived from [10] and [13]:

Table A.2.1-1: Conversational IMS speech service parameters

		Selection or parameter value		Notes
Nr of AMR / AMR-WB frames in RTP packet		One		Min. 20 ms packet interval RTP header adds 12 bytes
AMR / AMR-WB payload mode		Bandwidth efficient		
AMR , lowest and highest modes	AMR / AMR-WB mode	Payload bytes per frame		Payload bits include ARM data, payload header, table of contents and padding.
	4.75	14		
	12.2	32		Multi-channel session, interleaving or internal CRC not used.
AMR-WB, lowest and highest modes	6.6	18		Size of SID frame is 7 bytes.
	23.85	61		

For non-IMS services, the above-mentioned restrictions are not applicable. However, it can be assumed that the parameters for conversational VoIP services do not usually deviate significantly from those given above.

For speech streaming, the codecs are the same as above (AMR and AMR-WB) [11]. In [14], examples on streaming services are presented. The most important difference to the conversational parameters is that the number of speech frames in one RTP packet may be much larger (e.g., 10). On the other hand, the payload mode can be different (octet aligned), CRCs included etc. (as in [14]), which gives larger payload presented in table A.2.1-1.

A.2.2 Audio

"Audio" in this document refers to other than speech-based audio (music, combination of music and speech, etc...).

In [10] there is no distinction between audio and speech for conversational traffic. The default audio codecs for IMS are AMR and AMR-WB, hence the numbers in chapter A.2.1 are applicable.

According to [11], MPEG-4 AAC-LC codec should be supported for audio streaming, and in addition, also MPEG-4 AAC-LTP may be supported. As for the speech streaming, the RTP packets contain of several audio frames, as presented in [14].

A.2.3 Video

The video codecs have a wide range of possible bit rates and packet sizes. For streaming and conversational video, the codecs are H.263 and MPEG 4 (see [11] and [15]). RTP packet size is restricted in IMS conversational video to 512 bytes [10].

Examples on video streaming are presented in [14]. There is a wide range of RTP packet rates, depending on various factors, e.g., codec rate or packetization.

A.2.4 Text

According to [16], the data rate of T.140 text telephony over RTP is low: "The rate of character entry is usually at a level of a few characters per second or less. Therefore, the expected number of characters to transmit is low. Only one or a few new characters are expected to be transmitted with each packet". Hence, large part of the traffic consists of the overhead, i.e., RTP/UDP/IP headers and RTCP/UDP/IP packets. The data rate is mostly less than 1 kbps. Whenever the delay has to be guaranteed, the context cannot be of interactive or background traffic class, but e.g., streaming class has to be used.

It should be noted that text telephony does not include document viewing or other similar use, but only situations where the text is entered by human users in the both ends. For example, the "Text" service in Figure A-2 does not refer to text telephony.

A.2.5 Speech and video

There are basically two different alternatives, depending on whether audio and video streams are on the same or different PDP contexts. The former case is basically similar to the scenario in the chapter A.2.3. The latter latter case has different implications on lower layers. For streaming case with speech and video over the same context, there is an example in [14].

A.2.6 Audio and video

The difference in this scenario to the previous one is that the audio/speech coded may be different. On lower layers, this can be handled as the previous scenario.

A.2.7 Video, audio, or speech with text

The additional text telephony stream adds a low bit rate PDP context. Whenever there is a requirement to synchronize the text with the voice or video stream, the text telephony context delay parameters have to be aligned with those of the others (i.e., the delay requirement may be stricter than for stand-alone text telephony).

Annex B: Mapping of service scenarios to Radio Access Bearers

B.1 Common requirements

The bearers in this document shall be based entirely on existing 25-series specifications. That is, no requirement on RABs that is not in line with existing RAN specifications, shall be presented.

In this chapter, the main principles for selecting the parameters are presented.

B.2 Bearer characteristics

The following table lists general characteristics of the bearers in the scenarios:

	Parameter	Typical selection or parameter value	Notes
PDCP	PDCP header, bits	8	8 bit PDCP header is the default in the scenarios. (For lossless SRNS relocation support, PDCP header can also contain sequence number of 16 bits.)
	Header compression	RFC 3095 (ROHC)	ROHC assumed to compress [RTP/JUDP/IP (and ESP/IP) traffic. No ROHC context identifier needed: PID field (5 bits) of PDCP header is sufficient to indicate all ROHC contexts in the given scenarios. The most common header (shortest 2 nd order header) is 3 bytes when UDP checksum is present (with IPv6); see RLC payload sizes. ROHC feedback packets transmitted in opposite direction, interspersed with main flow packets. Segmentation of ROHC not in use, because only non-transparent RLC modes in these scenarios.
		RFC 2507	For TCP/IP compression (even though any IP headers, also those in UDP/IP could be compressed by RFC 2507). TCP/IP used in interactive and background, therefore no impact on RLC payload sizes
RLC			
	RLC mode	UM or AM	TM not possible because no a priori information on (compressed) IP packets, and no mechanism specified for negotiating ROHC packet sizes parameters. UM used for conversational traffic class, AM for all other classes.

	Payload sizes, bit		Number of different payload sizes to be limited so that max size of TFCS is reasonably low. In some scenarios, one of payload sizes is IP payload with shortest ROHC header. For AM, default payload size is 320 bits
	Max data rate, kbps		The actual data rate on IP layer is somewhat different from this nominal figure, due to: <ul style="list-style-type: none">• PDCP header• Length indicator part of RLC header• Retransmissions (in AM)• Header compression
	UMD/AMD PDU header, bit	8 / 16	8 for UM, 16 for AM

Table B.2-1: Common characteristics of L2

In the scenarios, the RABs for data stream are not presented. Each of the scenarios may or may not have one or more RABs for data stream. The RABs can be selected from the interactive/background RABs.

B.3 RAB Scenarios

NOTE: The following RAB combinations are only examples of possible implementations of the scenarios.

Due to flexibility in RAN specifications (and in PDP context parameters) there is a large number of other possible RABs and their combinations that could implement the scenarios. There are also other RAB combinations applicable for other scenarios, not listed below.

This chapter concentrates on the basic scenarios of chapter A.2.1, thus excluding most of the combinations of multiple sessions.

Annex C:

Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
09/2002	RP-17	RP-020663	-		Creation.	-	-
12/2002	RP-18	RP-020890	-		Merge of RP-020877 with RP-020814. Clause numbering changed. Approved at TSG RAN#18.	2.0.0	6.0.0
03/2003	RP-19	RP-030109	001		Streaming and interactive/background RAB combinations	6.0.0	6.1.0
	RP-19	RP-030109	002		QoS attributes for RABs in 25.993	6.0.0	6.1.0
	RP-19	RP-030109	003		TDD RABs in 25.993	6.0.0	6.1.0
06/2003	RP-20	RP-030288	004		Corrections to the UE capabilities and editorial changes	6.1.0	6.2.0
	RP-20	RP-030288	005		New configuration for CBS: CTCH, PCCH, 32kbps RAB and SRBs on 1 S-CCPCH	6.1.0	6.2.0
	RP-20	RP-030288	006		New SCCPCH Configurations	6.1.0	6.2.0
	RP-20	RP-030288	008		PS streaming and CS speech RAB combinations	6.1.0	6.2.0
	RP-20	RP-030288	009		RB configuration for the support of wideband AMR speech telephony services	6.1.0	6.2.0
	RP-20	RP-030288	010		Corrections on TDD RABs	6.1.0	6.2.0
09/2003	RP-21	RP-030497	012		IMS RAB scenarios	6.2.0	6.3.0
	RP-21	RP-030489	013		Addition of Streaming RABs	6.2.0	6.3.0
12/2003	RP-22	RP-030609	014		BTFD with Flexible TrCH position	6.3.0	6.4.0
	RP-22	RP-030609	015		Addition of Conversational – Interactive/Background RAB combination	6.3.0	6.4.0
03/2004	RP-23	RP-040100	019		Alignment with 34.108 for TDD	6.4.0	6.5.0
	RP-23	RP-040100	024		S-CCPCH combination for HS-DSCH channel type switching	6.4.0	6.5.0
	RP-23	RP-040109	025		DCH combination for HS-DSCH channel type switching	6.4.0	6.5.0
06/2004	RP-24	RP-040205	026		Corrections on required capabilities for 32kbps UE class and addition of the 12kbps class	6.5.0	6.6.0
	RP-24	RP-040205	027		Addition of RAB Parameters For RABs Removed From TS34.108 But Retained In TS25.993	6.5.0	6.6.0
09/2004	RP-25	RP-040325	028		Physical layer multiplexing configuration in case of AMR and two PS RABs with zero bit rates	6.6.0	6.7.0
	RP-25	RP-040325	029		Physical layer multiplexing configuration in case of two PS RABs	6.6.0	6.7.0
	RP-25	RP-040325	030		Correction of RAB configuration in 1.28Mcps TDD	6.6.0	6.7.0
	RP-25	RP-040325	032		Conversational PS RAB for HS-DSCH	6.6.0	6.7.0
12/2004	RP-26	RP-040483	031	3	Addition of HSDPA RABs	6.7.0	6.8.0
	RP-26	RP-040475	033		Addition RAB combinations for UL>DL PS rates	6.7.0	6.8.0
	RP-26	RP-040475	034		Radio bearer combination for PS streaming in section 7.1.74	6.7.0	6.8.0
	RP-26	RP-040475	035	1	Correct TFCS used in 128DL RAB	6.7.0	6.8.0
03/2005	RP-27	RP-050064	036		Addition of asymmetric RAB-combinations with voice	6.8.0	6.9.0
	RP-27	RP-050071	037		AMR-WB reference RAB configurations	6.8.0	6.9.0
06/2005	RP-28	RP-050325	0038		Introduction of fixed DTX positions for I/B RAB combinations	6.9.0	6.10.0
	RP-28	RP-050325	0039		Inclusion of HSDPA RABs already defined in 34.108	6.9.0	6.10.0
	RP-28	RP-050321	0040		CCCH message enhancements	6.9.0	6.10.0
	RP-28	RP-050325	0041		Introduction of Streaming RABs over HSDPA	6.9.0	6.10.0
09/2005	RP-29	RP-050455	0042		Redefinition of Radio Access Bearer (RAB) combinations	6.10.0	6.11.0
	RP-29	RP-050455	0043		Proposed new notation for HSDPA Radio Bearers (RB)	6.10.0	6.11.0
	RP-29	RP-050455	0044		Combinations of radio bearers on DPCH with WB-AMR and I/B PS	6.10.0	6.11.0
	RP-29	RP-050455	0045		Inclusion of additional example RAB combinations	6.10.0	6.11.0
	RP-29	RP-050455	0046		Addition of RAB-combinations with AMR 5.9 voice and AMR 12.2 with two PDP contexts	6.10.0	6.11.0
	RP-29	RP-050487	0047		Maximum number of bits per TTI for extended CCCH	6.10.0	6.11.0
	RP-29	RP-050586	0050	1	Reference RB configuration for AMR utilising 5.9, and 4.75 kbps with SF256 in DL	6.10.0	6.11.0
12/2005	RP-30	RP-050799	0048	3	Addition of VoIP RAB combinations	6.11.0	6.12.0
	RP-30	RP-050799	0049	3	Addition of VoIP RAB combination for multiplexed RTP and RTCP flows	6.11.0	6.12.0
	RP-30	RP-050799	0051	1	Addition of multi-rate AMR-NB configuration with SRB#5	6.11.0	6.12.0
	RP-30	RP-050799	0052	1	Introduction of high bit rate SRB	6.11.0	6.12.0
	RP-30	RP-050799	0053	3	Addition of multi-rate AMR configuration over HSDPA	6.11.0	6.12.0
	RP-30	RP-050799	0054	1	Miscellaneous corrections	6.11.0	6.12.0
	RP-30	RP-050799	0055		Introduction of conversational mono rate AMR 5.9 kbps RAB with SF 128.	6.11.0	6.12.0
	RP-30	RP-050799	0057		PL for Conversational / speech (12.65, 8.85, 6.6) kbps + Interactive 0 kbps	6.11.0	6.12.0
	RP-30	RP-050799	0060		WB-AMR configurations	6.11.0	6.12.0
	RP-30	RP-050799	0061	1	Addition of VoIP RAB combinations	6.11.0	6.12.0

	RP-30	RP-050799	0062		Addition of VoIP RAB combination for multiplexed RTP and RTCP flows	6.11.0	6.12.0
--	-------	-----------	------	--	---	--------	--------

History

Document history		
V6.4.0	December 2003	Publication
V6.5.0	May 2004	Publication
V6.6.0	June 2004	Publication
V6.7.0	September 2004	Publication
V6.8.0	December 2004	Publication
V6.9.0	March 2005	Publication
V6.10.0	June 2005	Publication
V6.11.0	September 2005	Publication
V6.12.0	December 2005	Publication