

ETSI TS 123 101 V18.0.0 (2024-04)



**Universal Mobile Telecommunications System (UMTS);
General Universal Mobile Telecommunications System (UMTS)
architecture
(3GPP TS 23.101 version 18.0.0 Release 18)**



Reference

RTS/TSGS-0223101 vi00

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	4
Introduction	4
1 Scope	5
2 References	5
3 Definitions, symbols and abbreviations	5
3.1 Definitions	5
3.2 Symbols.....	5
3.3 Abbreviations	5
4 General	6
5 Domains in UMTS	6
5.1 Domain split.....	7
5.2 User equipment Domain.....	7
5.2.1 Mobile equipment Domain	8
5.2.2 USIM Domain	8
5.3 Infrastructure Domain	8
5.3.1 Access Network Domain	8
5.3.2 Core Network Domain.....	9
5.3.2.1 Serving Network Domain	9
5.3.2.2 Home Network Domain	9
5.3.2.3 Transit Network Domain.....	9
6 Functional Communication between UMTS domains	9
6.1 Transport stratum	11
6.2 Access Stratum	12
6.3 Serving Stratum.....	12
6.4 Home Stratum	12
6.5 Application Stratum	13
Annex A (informative): Change History	14
History	15

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

UMTS will support a wide range of applications with different quality of service profiles. At present many of these applications are not possible to predict. Also the usage of the different applications are difficult to predict i.e. it is not possible to optimise UMTS to only one set of applications. One conclusion of this is that UMTS must be built in such a way that it is flexible and possible to evolve so it will have a long technical lifetime. Therefore a modular approach is recommended when defining the network parts of UMTS. This is in line with the recommendation from GMM. In this context a module represents a part of a UMTS network i.e. one or several physical network nodes that together implements some functionality. The modular approach should also make UMTS possible to implement efficiently in different environments.

1 Scope

This TS defines the basic physical and functional separation of UMTS. The contents of this specification is limited to those features that are common to all UMTS networks independent of their origin. It identifies and names the reference points and functional groupings appearing at this level.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] ETSI SR 001 687: ETSI Global Multimedia Mobility (GMM) report.
- [2] UMTS 22.01: "Universal Mobile Telecommunications System (UMTS): Service aspects; Service principles".
- [3] 3GPP TS 24.002: "GSM - UMTS Public Land Mobile Network (PLMN) Access Reference Configuration".

3 Definitions, symbols and abbreviations

3.1 Definitions

Terms introduced in this document:

Domain: The highest-level group of physical entities. Reference points are defined between domains.

Stratum: Grouping of protocols related to one aspect of the services provided by one or several domains.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

Cu	Reference point between USIM and ME
Iu	Reference point between Access and Serving Network domains
Uu	Reference point between User Equipment and Infrastructure domains, UMTS radio interface
[Yu]	Reference point between Serving and Transit Network domains
[Zu]	Reference point between Serving and Home Network domains

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

USIM	User Services Identity Module
ME	Mobile Equipment
MT	Mobile Termination
MExE	Mobile Station Application Execution Environment
TE	Terminal Equipment

4 General


The general UMTS architecture is modelled, at a high level, from both physical and functional viewpoints. The physical aspects are modelled using the domain concept and the functional aspects are modelled using the strata concept.

The two views are introduced separately and then the mapping between the views is discussed.

This specification shows at a basic level physical and functional separations to allow a UMTS network to fit within the context of the IMT-2000 family of networks. It does not attempt to develop aspects of a UMTS network that are highly specific to that implementation.

5 Domains in UMTS

The following figure shows the basic domains in UMTS as described in this clause.

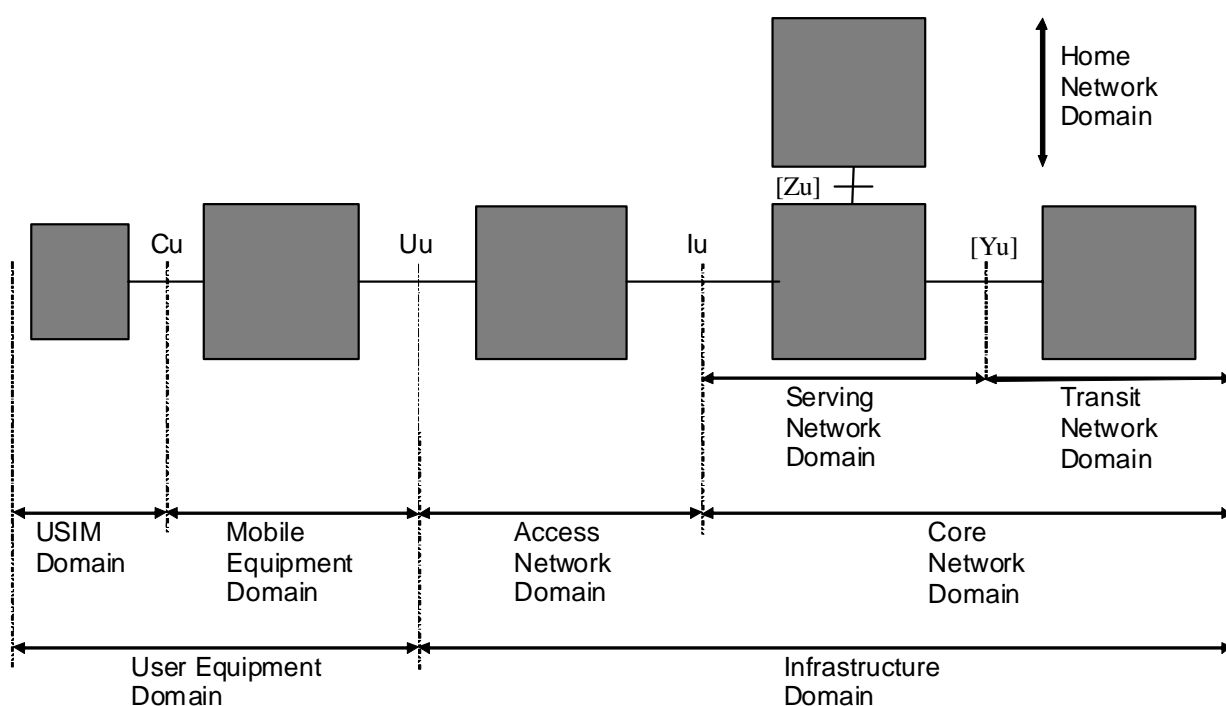

NOTE: The domains identified in the figure will generally result from an evolution of existing network infrastructures. The core network domain may result from evolutions of existing network infrastructures, e.g., a GSM infrastructure, a N-ISDN infrastructure, a B-ISDN infrastructure or a PDN infrastructure. The evolution of these infrastructures may be performed via the use of IWUs, hidden within the domains shown in the figure.

Figure 1: UMTS domains and reference points

- Cu = Reference point between USIM and ME
- Iu = Reference point between Access and Serving Network domains
- Uu = Reference point between User Equipment and Infrastructure domains, UMTS radio interface
- [Yu] = Reference point between Serving and Transit Network domains
- [Zu] = Reference point between Serving and Home Network domains

5.1 Domain split

A basic architectural split is between the user equipment (terminals) and the infrastructure. This results in two domains: the **User Equipment Domain** and the **Infrastructure domain**.

User equipment is the equipment used by the user to access UMTS services. User equipment has a radio interface to the infrastructure. The infrastructure consists of the physical nodes which perform the various functions required to terminate the radio interface and to support the telecommunication services requirements of the users. The infrastructure is a shared resource that provides services to all authorised end users within its coverage area.

The reference point between the user equipment domain and the infrastructure domain is termed the "Uu" reference point (UMTS radio interface).

NOTE: The description assumes an access interface based on UTRA. However, the physical and functional separation described in this document is general and is applicable also if other access technologies are used.

5.2 User equipment Domain

This domain encompasses a variety of equipment types with different levels of functionality. These equipment types are referred to as user equipment (terminals), and they may also be compatible with one or more existing access (fixed or radio) interfaces e.g. dual mode UMTS-GSM user equipment. The user equipment may include a removable smart card that may be used in different user equipment types. The user equipment is further sub-divided in to the **Mobile Equipment Domain** (ME) and the **User Services Identity Module Domain** (USIM).

The reference point between the ME and the USIM is termed the "Cu" reference point.

For the purpose of UMTS Cellular networks the following definition applies:

User Equipment is a device allowing a user access to network services. For the purpose of 3GPP specifications the interface between the UE and the network is the radio interface. A User Equipment can be subdivided into a number of domains, the domains being separated by reference points. Currently defined domains are the USIM and ME Domains. The ME Domain can further be subdivided into several components showing the connectivity between multiple functional groups. These groups can be implemented in one or more hardware devices. An example of such a connectivity is the TE - MT interface. Further, an occurrence of User Equipment is an MS for GSM as defined in TS 24.002 [3].

The figure below shows the Functional Model for the User Equipment, UE.

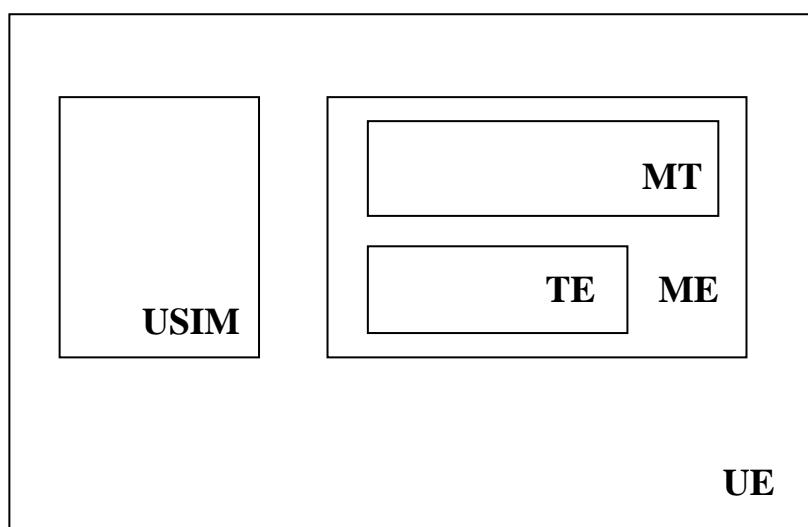


Figure 1a: Functional Model for the User Equipment

The 07- and 27-series refer to physical instances of this Functional Model. The figure below shows an example of a physical configuration as it could be used in these specifications. The boxes, in this figure, refer to physical elements. The names within brackets are just provided to map the functional blocks from the figure above onto physical elements.

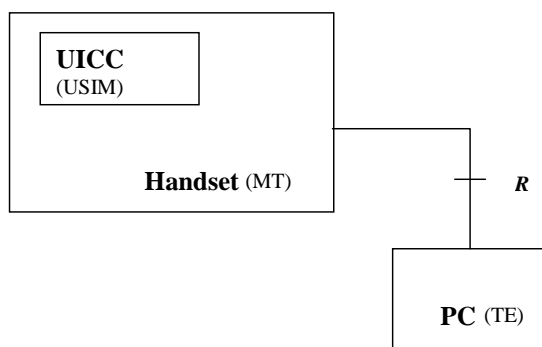


Figure 1b: Example of physical configuration

5.2.1 Mobile equipment Domain

The Mobile Equipment performs radio transmission and contains applications. The mobile equipment may be further sub-divided into several entities, e.g. the one which performs the radio transmission and related functions, **Mobile Termination**, MT, and the one which contains the end-to-end application or (e.g. laptop connected to a mobile phone), **Terminal Equipment**, TE. This separation is used in the description of the functional communication in figure 3 but no reference point is defined in this specification.

5.2.2 USIM Domain

The USIM contains data and procedures which unambiguously and securely identify itself. These functions are typically embedded in a stand alone smart card. This device is associated to a given user, and as such allows to identify this user regardless of the ME he uses.

5.3 Infrastructure Domain

The Infrastructure domain is further split into the **Access Network Domain**, which is characterised by being in direct contact with the User Equipment and the **Core Network Domain**. This split is intended to simplify/assist the process of de-coupling access related functionality from non-access related functionality and is in line with the modular principle adopted for the UMTS.

The Access Network Domain comprises roughly the functions specific to the access technique, while the functions in the Core network domain may potentially be used with information flows using any access technique. This split allows for different approaches for the Core Network Domain, each approach specifying distinct types of Core Networks connectable to the Access Network Domain, as well as different access techniques, each type of Access Network connectable to the Core Network Domain.

The reference point between the access network domain and the core network domain is termed the "Iu" reference point.

NOTE: The split into the User Equipment Domain, the Access Network Domain and the Core Network Domain is consistent with the GMM report.

5.3.1 Access Network Domain

The Access Network Domain consists of the physical entities which manage the resources of the access network and provides the user with a mechanism to access the core network domain.

Additional reference points within the access domain may be identified in other specifications.

5.3.2 Core Network Domain

The Core Network Domain consists of the physical entities which provide support for the network features and telecommunication services. The support provided includes functionality such as the management of user location information, control of network features and services, the transfer (switching and transmission) mechanisms for signalling and for user generated information.

[Note: Much more could/should be written about the reference points between the core network and other networks].

The core network domain is sub-divided into the **Serving Network Domain**, the **Home Network Domain** and the **Transit Network Domain**.

The reference point between the serving network domain and the home network domain is termed the [Zu] reference point.

The reference point between the serving network domain and the transit network domain is termed the [Yu] reference point.

Additional sub-divisions and reference points within the core network domain may be identified in other specifications.

5.3.2.1 Serving Network Domain

The serving network domain is the part of the core network domain to which the access network domain that provides the user's access is connected. It represents the core network functions that are local to the user's access point and thus their location changes when the user moves. The serving network domain is responsible for routing calls and transport user data/information from source to destination. It has the ability to interact with the home domain to cater for user specific data/services and with the transit domain for non user specific data/services purposes.

5.3.2.2 Home Network Domain

The home network domain represents the core network functions that are conducted at a permanent location regardless of the location of the user's access point.

The USIM is related by subscription to the home network domain. The home network domain therefore contains at least permanently user specific data and is responsible for management of subscription information. It may also handle home specific services, potentially not offered by the serving network domain.

NOTE: Most of the functionality associated with the service provider role according to the UMTS role model (ref UMTS 22.01), is normally contained within the home network domain.

5.3.2.3 Transit Network Domain

The transit network domain is the core network part located on the communication path between the serving network domain and the remote party. If, for a given call, the remote party is located inside the same network as the originating UE, then no particular instance of the transit domain is activated.

6 Functional Communication between UMTS domains

The following strata have been identified within UMTS:

- Application stratum;
- Home stratum;
- Serving stratum and
- Transport stratum

The following figures show the interactions between the UMTS domains. Two figures are used to reflect the path diversion between the flows exchanged between serving and home domains on one side and between serving and transit on the other side.

Figure 2 below shows the interactions between the USIM, MT/ME, Access Network, Serving Network and Home Network domains. Figure 3 shows the interactions between TE, MT, Access Network, Serving Network, Transit Network domains and the Remote Party. The Home Stratum only involves domains from figure 2, the Application Stratum only involves domains from figure 3. The Serving and Transport Strata involve domains from figures 2 and 3, so part of them are duplicated in the two figures

The direct flows between non-contiguous domains (i.e. between domains non directly interconnected) are transparently transported across all the domains and interfaces located on the communication path between these end domains. E.g. the USIM-Home Network flows are transparently transported through USIM-MT, MT-Access Network, Access Network-Serving Network and Serving Network-Home Network interfaces, and relayed without interpretation by MT, Access Network and Serving Network domains.

The dotted lines indicates that the protocol used is not specific to UMTS, in some cases different protocols are possible. However, to provide easy roaming capabilities, it is desirable to agree upon the protocols used. The definition of these protocols is outside the scope of the UMTS specifications.

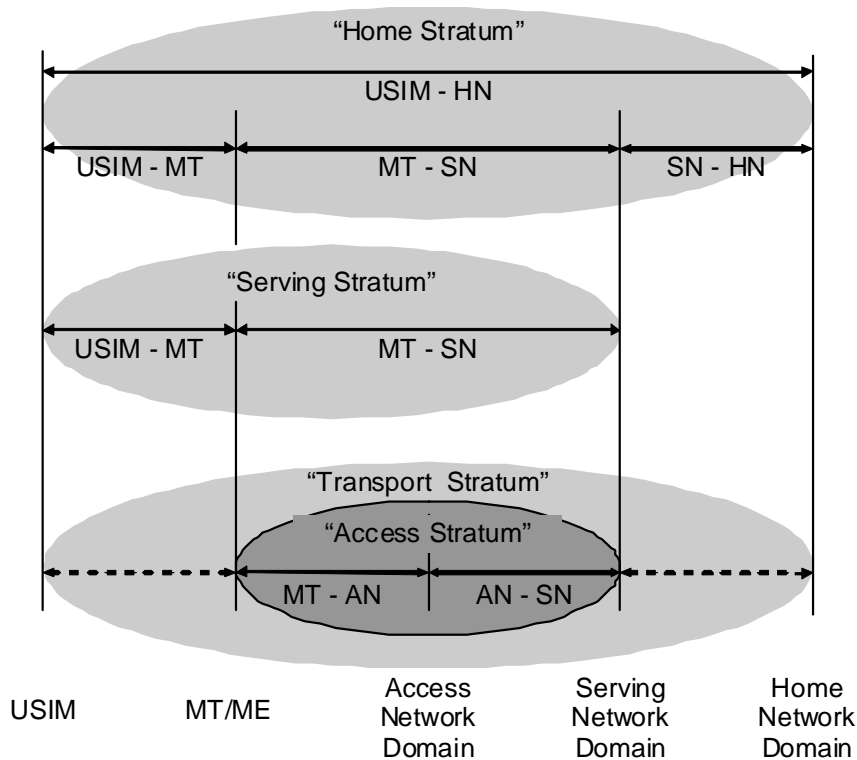


Figure 2: Functional flows between the USIM, MT/ME, Access Network, Serving Network and Home Network domains

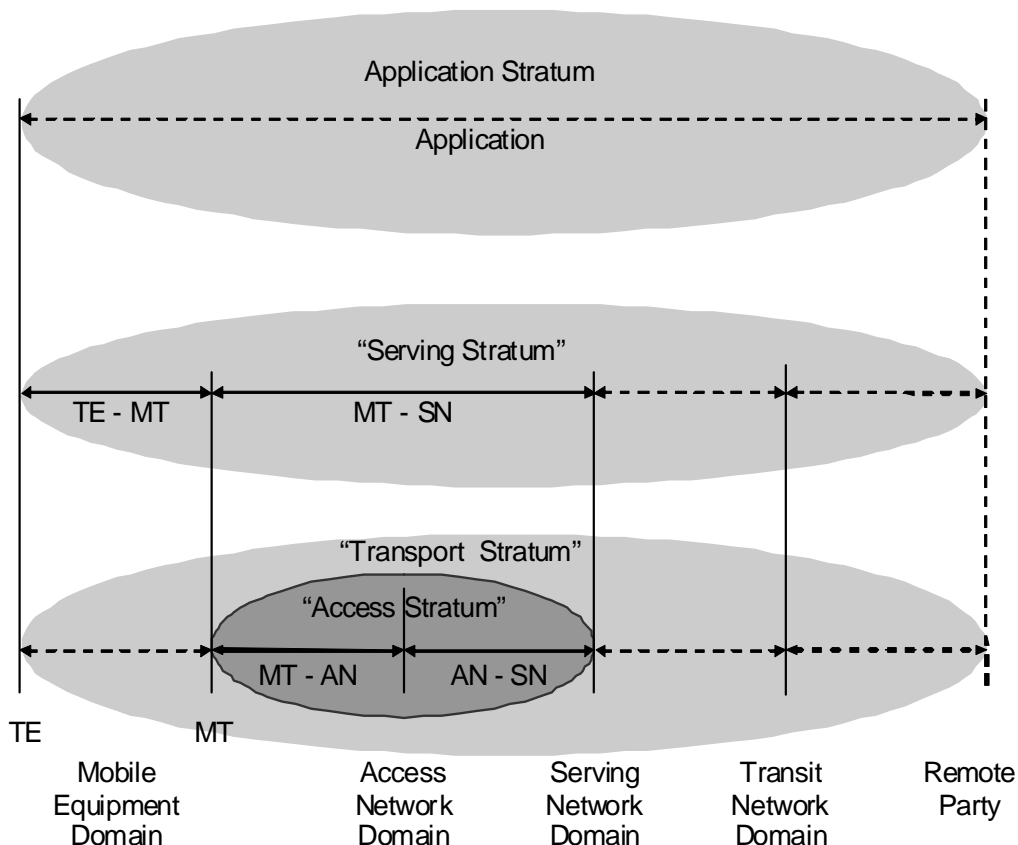


Figure 3: Functional flow between TE, MT, Access Network, Serving Network, Transit Network domains and the Remote Party

The "Remote Party" represents the remote end entity (user or machine) and is included in the figure to show the end-to-end character of the communication, the specification of the remote party is outside the scope of the UMTS specifications.

6.1 Transport stratum

This stratum supports the transport of user data and network control signalling from other strata through UMTS. The transport stratum includes consideration of the physical transmission format used for transmission and also:

- mechanisms for error correction and recovery;
- mechanisms to encrypt data over the radio interface and in the infrastructure part if required;
- mechanisms for adaptation of data to use the supported physical format (if required); and
- mechanisms to "transcode" data to make efficient use of, e.g., the radio interface (if required).

It may also include resource allocation and routing local to the different interfaces.

The **Access Stratum**, which is specific to UMTS, is the part of the transport stratum located between the edge node of the serving core network domain and the MT ('MT-Access Network' and 'Access Network-Serving Network' arrows in figure 2 and 3).

6.2 Access Stratum

This is the functional groupings consisting of the parts in the infrastructure and in the user equipment and the protocols between these parts being specific to the access technique (i.e. the way the specific physical media between the User Equipment and the Infrastructure is used to carry information). The access stratum provides services related to the transmission of data over the radio interface and the management of the radio interface to the other parts of UMTS.

The access stratum includes the following protocols:

- Mobile Termination - Access Network
This protocol supports transfer of detailed radio-related information to co-ordinate the use of radio resources between the MT and the access network.
- Access Network - Serving Network
This protocol supports the access from the serving network to the resources provided by the access network. It is independent of the specific radio structure of the access network.

6.3 Serving Stratum

This stratum consists of protocols and functions to route and transmit data/information, user or network generated, from source to destination. The source and destination may be within the same or different networks. Functions related to telecommunication services and are located in this stratum.

The serving stratum includes the following protocols:

- USIM - Mobile Termination
This protocol supports access to subscriber-specific information for support of functions in the user equipment domain.
- Mobile Termination - Serving Network
This protocol supports access from the MT to the services provided by the serving network domain.
- Terminal Equipment- Mobile Termination
This protocol support exchange of control information between the TE and the MT.

6.4 Home Stratum

This stratum contains the protocols and functions related to the handling and storage of subscription data and possibly home network specific services. It also includes functions to allow domains other than the home network domain to act on behalf of the home network. Functions related to subscription data management, customer care, including billing and charging, mobility management and authentication are located in this stratum.

The home stratum includes the following protocols:

- USIM - Home Network
This protocol supports co-ordination of subscriber-specific information between the USIM and the home network.
- USIM - MT
This protocol provides the MT with access to user specific data and resources necessary to perform actions on behalf of the home network.
- MT - Serving Network
This protocol supports user specific data exchanges between the MT and the Serving Network.
- Serving Network - Home Network
This protocol provides the serving network with access to home network data and resources necessary to perform its actions on behalf of the home network, e.g., to support the users communications, services and features (including VHE).

6.5 Application Stratum

This stratum represents the application process itself, provided to the end-user. It includes end-to-end protocols and functions which make use of services provided by the home, serving and transport strata and infrastructure to support services and/or value added services.

The functions and protocols within the application stratum may adhere to GSM/UMTS standards such as MExE or may be outside the scope of the UMTS standards. However, the definition of the services provided by the other strata, and the interfaces to them, is within the scope of the standards

End-to-end functions are applications which are consumed by users at the edge of/outside the overall network. The applications may be accessed by authenticated users who are authorised to access such applications. The users may access the applications by using any of the variety of available user equipment.

Annex A (informative): Change History

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
2004-12	SA#26				Created version 6.0.0	5.0.1	6.0.0
2007-06	SP-36	-	-	-	Update to Rel-7 version (MCC)	6.0.0	7.0.0
2008-12	SP-42	-	-	-	Update to Rel-8 version (MCC)	7.0.0	8.0.0
2009-12	SP-46	-	-	-	Update to Rel-9 version (MCC)	8.0.0	9.0.0
2011-03	SP-51	-	-	-	Update to Rel-10 version (MCC)	9.0.0	10.0.0
2012-09	-	-	-	-	Update to Rel-11 version (MCC)	10.0.0	11.0.0
2014-09	SP-65	-	-	-	Update to Rel-12 version (MCC)	11.0.0	12.0.0
2015-12	-	-	-	-	Update to Rel-13 version (MCC)	12.0.0	13.0.0
2017-03	-	-	-	-	Update to Rel-14 version (MCC)	13.0.0	14.0.0
2018-06	SP-80	-	-	-	Update to Rel-15 version (MCC)	14.0.0	15.0.0
2020-07	SP-88E	-	-	-	Update to Rel-16 version (MCC)	15.0.0	16.0.0
2022-03	SP-95E	-	-	-	Update to Rel-17 version (MCC)	16.0.0	17.0.0
2024-03	-	-	-	-	Update to Rel-18 version (MCC)	17.0.0	18.0.0

History

Document history		
V18.0.0	April 2024	Publication